



COME ON IN AND DISCOVER ELICA'S FOURTH DIMENSION.


The versatility of the functions ranging from light to extraction and cooking translate into models with an innate wow factor. Taking the product apart to discover its diversified inner workings and accessories, each one essential for its operation, gives you the opportunity to get a much more comprehensive view of the object.

The quality of the materials, the attention to detail, the passion for the design, captured in their essence, become the key features which transmit an emotion.

The exact emotion that represents the fourth dimension of Elica products.



FRAME AND DISCOVER

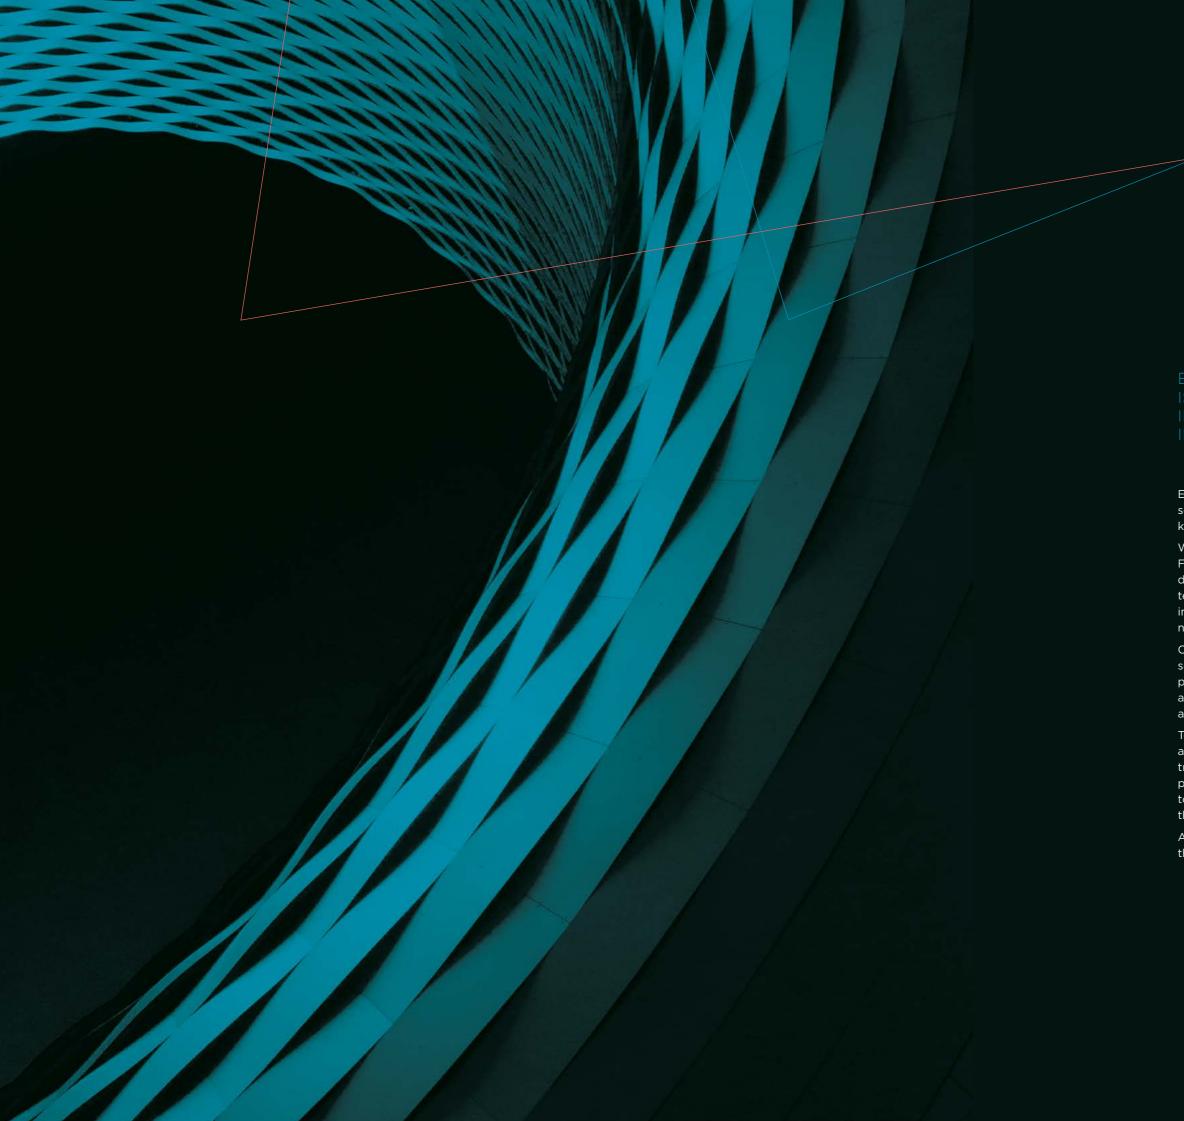

ELICA
IS SURPRISE AND PASSION,
INNOVATION AND TRADITION,
INTUITION AND COURAGE.

Every day, we work to satisfy and surprise our customers with solutions that bring together design, experience, reliability, know-how and style.

We began life in Italy in 1970 and grew up in the world. From the very beginning, we applied the principles of Italian design to our kitchen hoods and we used the most innovative technological tools. Over the years, we have revolutionised the image of hoods and the Elica brand has become a household name worldwide.

Our evolution has led us to explore the field of cooking with surprising solutions, conceived from an intuition, a change of perspective that led to the creation of the NikolaTesla line of aspirating induction hobs, winner of numerous international awards, including the renowned Compasso d'Oro ADI.

Today, attention to detail, the expert use of the best materials and an artisan approach are the hallmarks of our offer and translate into ranges in which the perfection of industrial production is combined with extensive artisan experience, to create one-of-a-kind products capable of surprising and thrilling.

All our innovations are created with one purpose: to amaze, thrill and make our customers happy.

INDEX

16

54

82

182

Product Features Elica Connect

NIKOLATESLA

SUSPENDED

218 DOWNDRAFT

254 GOOD TO KNOW

256 Accessories

258 Odour filters 260 Grease filters 261 Remote motors

271 Technical informations

282 The hood and you

230 BUILT-IN

WALL 142 ISLAND 158 CEILING

ARCH & LIGHTAIR

NIKOLATESLA 16



NIKOLATESLA FIT 44



NIKOLATESLA ONE 28



NIKOLATESLA FLAME 40



NIKOLATESLA PRIME 36



NIKOLATESLA LIBRA 32



NIKOLATESLA SWITCH 24

ARCH & LIGHTAIR 54



IKONA MAXXI PURE 74

ELICA AIR PURE



OPEN SUITE SUPERIOR 56

ELICA CONNECT



OPEN SUITE 64 ELICA CONNECT

WALL 82



ADÉLE 94



MAJESTIC NO DRIP 129



SPOT NG 101



APLOMB 135



MISSY 141



SPOT URBAN 100



BLOOM 133



OM AIR 130



STRIPE 136



BLOOM-S 124

CIRCUS

105



PLAT 112

REEF

104



SUPER PLAT 106 ELICA CONNECT





SWEET 90



FLAT GLASS 103



RULES 116



TAMAYA 2.0 S 140



GALAXY 99



SHEEN-S 138



TRIBE 102





SHIRE 137



VERTIGO 131



98



SHY-S 139

ISLAND 142



ADÉLE ISLAND 149



IKONA 152



TRIBE ISLAND 156



GALAXY ISLAND 151

HAIKU ISLAND



JOY ISLAND

150



REEF ISLAND 157

CEILING 158



CLOUD SEVEN 179



HILIGHT-X 177



LULLABY@ 164 ELICA CONNECT



170



SKYDOME 169

SUSPENDED 182



EASY UX 207

ÉDITH

198



JUNO 216

JUNO URBAN



SHINING 194



SUMMILUX





BOXIN NO DRIP 241



ERA 247



LANE 239

252



LEVER

248

INTEGRATA



IKONA LIGHT 212



208

217



WAVE UX 202



INTERSTELLAR 184



SEASHELL 189

ELIBLOC HT 245



238

VERVE

DOWNDRAFT 218



GETUP 220 ELICA CONNECT




PANDORA 227

HILIGHT GLASS 175



ILLUSION







244



250

ELITE 26





CIAK 249



HIDDEN 2.0

ERA C

246



253



HIDDEN 2.0 @ 232 ELICA CONNECT

SUCTION



CONNECTIVITY

With the increasing widespread diffusion of the IoT world, it has become common practice to manage all your devices with a wi-fi connection. We can now control our extraction hood with the dedicated Elica app or through voice control to turn it on or off, adjust the extraction speed or intensity and the colour of the light, simply with a click or the help of the most popular vocal assistants. The app also becomes a useful tool for maintaining the product, thanks to periodic notifications which report on its status, any cleaning operations required or filters that need replacing



COMFORT SILENCE

With the widespread tendency to design open-plan kitchens joined to the living room, it has become important to be able to rely on hoods with a greater extraction capability which are quieter, so they do not intrude on the surroundings. Thanks to Comfort Silence, the sound level of Elica extraction hoods at maximum extraction speed does not disturb or interfere with the conversation of those present.



SUPER EASY INSTALLATION

With the exclusive Elica system, installation can be done in total safety in just a few steps, safeguarding the look of the product and the space in which it is positioned. After the hood is automatically locked in position, the fastening points can be finely adjusted to preserve the linear design of the kitchen and ensure perfect integration of the hood in the room. A simple, hardwearing and safe solution.



SPECIAL MATERIAL

In the guest for attractive products to show off but which have a functional, everyday use, materials play a key role. They can make the difference by becoming an attractive signature feature or by disappearing into the background and by being easy to maintain in the long term. They are fundamental in the process of innovation, forming the basis of an attractive look and a fulfilling user experience. Elica selects materials in which sturdiness, easy cleaning and aesthetic impact are combined in a perfect balance. The wide selection of finishes available offers maximum freedom of choice whatever the setting.




BACK ASPIRATION

There are now more ways of installing your extraction hood. On models with this function, it is possible to rotate the conveyor and directly connected the hood with the outlet in the wall behind it or in other models, the special architecture of the product allows the wall outlet to be created with a 90-degree elbow pipe. Thus, you can rely on maximum extraction while preserving the original outward appearance of the product which will not be modified by pipes or additional visible flues.



TOTAL INTEGRATION

The total look trend is becoming increasingly popular in kitchens now, guaranteeing a uniform, linear design with respect to the space. The Total Integration products have been designed to be seamlessly integrated into the kitchen whilst maintaining harmony with the surroundings.





SUCTION



LONG LIFE FILTER

To ensure the best performance and long-term duration of your hood, the traditional filters must be replaced every 3-6 months. To simplify the maintenance operations, Elica has designed the innovative, regenerable Long Life odour filter which lasts up to three years. Just wash it with hot water and neutral soap or in the dishwasher at 65° and dry it in the oven at 100° for ten minutes every two months to keeping it looking good as new. The level of efficiency is about 60%.



LONG LIFE FILTER ++

Long Life Filter ++ is the innovative filter studied by Elica for maximum performance. This filter guarantees efficient filtering in excess of 80% against a market average of around 60%. This odour filter can be regenerated and lasts for up to a maximum of three years, thus avoiding frequent and wasteful replacements. To maintain these characteristics, the filter must be regenerated every two or three months in hot water and neutral soap or in the dishwasher at 65° and dried in the oven in the oven at 100° for ten minutes to keeping it looking good as new. The perfect solution if you like trying out challenging dishes which take a long time to cook.



AIRMATIC

Now, thanks to Airmatic, your extraction hob area is completely automatic. The smart sensor can distinguish between the quality of the fumes and type of cooking and combine this information with the number and power of the induction hob areas being used. Even when the hob is switched off, the system automatically adapts by gradually decreasing extraction and eliminating any residual fumes and odours. This advanced technology is top of the range in the world of extractor hobs and allows you to obtain the best balance between silence, power and energy efficiency.



AUTOCAPTURE

With Autocapture, you will not have to worry about adjusting extraction based on what you are cooking. The hood will identify the cooking areas that are active and set the power accordingly, finding the best balance between silence, power and energy efficiency. And when you have finished cooking, the system gradually decreases the speed, eliminating any residual fumes and odours. The extraction hob becomes even more functional and practical for perfect cooking and excellent extraction.



SUCTION



MULTI-D CAPTURE

If you like a challenge when cooking and need highly efficient extraction capabilities, Elica has developed the Multi-d capture solution. The extraction is divided over multiple areas to guarantee the best fume capture capability. The fluid dynamic system allows you to increase the extraction speed by suitably sizing the surfaces through which the air passes. This guarantees a high cooking fume-capture efficiency through an increase in the negative pressure along the outside of the product.



EASY TO MAINTAIN

Keeping your hood clean not only ensures maximum hygiene in the kitchen but also long life for the product. The Elica models are designed with materials and finishes for instant maintenance operations. All the components, such as the grease and odour filters, can be easily accessed and removed so they can be washed or rapidly replaced.





DIM LIGHT

The light in the kitchen, as in any room, is a key design feature for improving the home living experience. Achieving the right intensity becomes fundamental in creating the desired atmosphere. Which is why Elica has designed the Dim light function which allows you to adjust the intensity of your extraction hood light with a simple control. Maximum light for the best visibility on the worktop or dimmed when relaxing.



TUNE WHITE

Lighting in the home should not be static because different tones of light are called for depending on the time of day: cool light is excellent for cooking while warm light creates a more relaxing mood. The Tune White function allows you adjust the LED colour from warm white (2400 k) up to cool white (5000 k). With Tune White, you can also align the colour of the light from the hood with the rest of the lights in the room for a uniform atmosphere throughout.

10 **elica** 11

AIR PURIFICATION

ELICA AIR PURE





MULTIFUNCTION

Ikona Maxxi Pure incorporates a hood and air purifier in a single product. The product has been cleverly designed to separate the hood module from the air purifier without compromising on performance and usability, and to make them work efficiently and independently. A "2 in 1" product designed to improve the air quality without the need for additional devices or complex monitoring systems, often invasive and disagreeable.



PURE SILENCE

The air purification is extremely discreet, in Silent mode the sound level of 33 dBA is imperceptible, comparable to the sound level of a library. The Elica system works without any noise pollution, creating a comfortable environment in your kitchen-living area.



COMBO PURE FILTER

The air purifier, fitted with a special combined HEPA and carbon filter, captures particles as small as 1 micron, freeing the space of unpleasant odours, allergens such as dust, animal hair, pollen, mould, pollutants produced by household cleaning agents, paints and coverings.

COOKING



KEEP WARM

If you make lunch and dinner in one go, if you just need to reheat a dish or if an unexpected event means you are late getting home, Elica offers the practical Keep Warm function which keeps dishes that have just been cooked warm. The Keep Warm function can be enabled for any cooking area.



TIMER

Forget about cooking times by turning on the timer. Just set the minutes and start the countdown. At the end, the cooking area will be automatically switched off and a beeper will sound. You can set independent timers on more than one area at the same time with the touch remote control.



POWER LIMITATION

If Power Limitation is set during installation, the maximum power absorbed by the product is limited, thus ensuring that you never exceed the pre-set limit. So you can cook efficiently with no interruptions in total safety.

COOKING



MULTI FLEXI SPACE

Lots of large pans on the stove together? With the Multi Flex Space system, you have more space available both in length and width when using large pots. You can slide the pans from one ring to another without lifting them thanks to the closed cross grids which create a flat, continuous surface. A practical cast iron worktop ensures that everything you need is always at hand.



DUAL BURNER

With Dual Burner, having small or large pans is not a problem. The innovative burner features a double crown with independent ignition of both burners, so perfect for both a small mocha coffee and a big pan.



BRIDGE ZONE

When you cook using longer or large pans, there is a risk that the heat is progressively dispersed on the surface of the pan from the centre outwards. The Bridge Zone function solves the problem by joining two cooking areas into one single larger area. With the same power, uniform and constant temperature for the best result of your dishes.



TEMPERATURE MANAGER

On a daily basis, we often prepare our own signature recipes as well as standard dishes. The Temperature Manager function is an excellent tool for optimising times. Just start one of the three pre-set programs (42, 72 or 92 degrees) with a simple, intuitive button and start cooking your more delicate dishes, such as mousses or sauces, reheating dishes or boiling water. No wasting of time and maximum efficiency.



STOP & GO

Sometimes you need to unexpectedly leave the kitchen in the middle of preparing a recipe, interrupting the cooking. In this case, if you enable the Stop&Go function, all the active areas can be switched off with a single gesture, saving whatever is being cooked.



PAUSE

With Pause&Recall, you can switch off all the cooking areas with one single gesture and then, restart them with a simple press of a button at the same previously set power, combining safety, cooking result and multi-tasking management.



POT DETECTOR

It is easy to see where to position the pot on the induction hob. With Pot Detector, the hob automatically detects the presence of the pot on the cooking area and provides heat only when it is correctly positioned.



CHILD LOCK

If you have children in your home, the Child Lock function is invaluable for ensuring the cooking or extraction areas are not accidentally switched on. The function can be enabled when the product is switched on but the cooking areas and extraction are switched off.

12 **elica**





ELICA CONNECT Google Play





THE ELICA CONNECT RANGE. DESIGNED TO MAKE LIFE EASIER

Elica is at your service in your everyday life and has created a range of connected products controlled by smartphone or via the vocal assistant which fit in seamlessly with the style of your kitchen, thanks to their innovative design. Avant-garde technical solutions have been developed to simplify everyday tasks, the ones with which you take care of yourself and your family, but take up your time and energy. If want to protect the air in your home, Elica Connect does it for you and you can concentrate on enjoying your free time, in total relaxation, with no worries.

All just one click away

Elica Connect is a simple and intuitive application that can be downloaded in a matter of seconds. After registering the product on the app, you will be granted access to a world of services designed to make your daily routine easier, at home, far away from home or wherever you are. From viewing the filter status to the remote operation of your hood, as well as the guide to maintenance and much more.



What you can ask your vocal assistant

Your vocal assistant allows you to switch the hood extraction on and off and to select the preferred speed. You can also adjust the intensity and tone of the light. Following your instructions, it will set the lighting based on the atmosphere you want to create; intimate and relaxing or adapted to a kitchen workbench where every detail must be clearly visible.

What you can do with the Elica Connect app

CONFIGURE THE LIGHTS

You can adjust the intensity and power of the hood lights in just a few seconds, modulate the temperature of the LEDs from warm to cold light, aligning the lighting of the hood with that of the room to create a uniform atmosphere throughout.

ADJUST EXTRACTION

In addition to switching the extraction system on and off based on your requirements, it is possible to adjust the extraction power of the hood, even remotely. Your hood switches off when you decide thanks to the timer function. You can use the default adjustments or customise the timer functions. You can ensure excellent performance in terms of extraction and noise levels by selecting the Silent function. Chat with your friends or watch TV while you are preparing your next dish.

TAKE CARE OF THE FILTERS

If the efficiency of your filters falls below the minimum threshold, an alert will notify you that it is necessary to clean, replace or regenerate the filters in your hood to guarantee the best performance and clean air in your home. The "How to" section provides you with a step by step guide on how to remove, maintain and reinsert the filters in your hood, including the steps on how to clean them. If your filter needs replacing, the app will take you directly to the Elica Shop where you can find all the filters that are compatible with your hood model. From here, with just one click, you can purchase and conveniently receive the filter, accessory or eco-friendly cleaning products in your home.

RECEIVE SUPPORT

Contacting us is easier and faster with the Elica Connect App. Elica support will be instantly on hand to solve the problem by giving you clear suggestions on how to proceed. You can also forget about paper documents because everything you need is in the Elica Connect App, from the warranty to the use and maintenance booklet. You can consult it whenever you want to without losing a second of your time.







14 **2** elica **♦ elica** 15



FOCUS ON NIKOLATESLA FOCUS ON NIKOLATESLA

WHY CHOOSE A NIKOLATESLA

Harmony and simplicity



A love of cooking is now expressed through an accurate design of the kitchen space and a careful choice of accessories. Extractor hobs are the solution for anyone who prefers a design with clean lines and open spaces where vertical volumes disappear, making way for an overall streamlined look.

According to recent market research, we are opting more and more to join the living room and kitchen areas, so we can prepare lunches and dinners in a social setting that does not cut us off from the rest of the house. To achieve this, we seek out electrical appliances which make our lives easier and guarantee maximum functionality when preparing food; appliances that discretely disappear once turned off thanks to their attractive exterior design which blends seamlessly into the background.

Eclectic and complete

The NikolaTesla range of integrated extractor hobs is Elica's answer to demand for style, performance and ease of use. But it doesn't stop there. NikolaTesla is the solution for anyone whose aim is to conjure up an emotion in the kitchen as well. The emotion of being amazed. The emotion of outdoing yourself with ambitious recipes and not having to worry about the fumes. The peace of mind of being to install and use the product with the greatest of ease. The pleasant surprise of being able to clean it quickly and easily. The enjoyment of using an extraction hob every day that seems to have been tailor-made for your home. An avant-garde inner technological unit, designed to provide the best extraction and cooking performance, is showcased in a sophisticated designer product, manufactured from hardwearing materials with carefully crafted finishes. The NikolaTesla range consists of unique models, suitable for any requirement: the clean design of Switch; the integration of the scales in Libra and the use of gas in Flame, while the compact 60- or 70-cm size of Fit is added to the Prime, One and Compasso d'Oro models to produce an eclectic and complete range.





OPERATION AND MAIN ADVANTAGES

Quality of air has always been key to Elica's products, incorporating the very best technology in hobs for intelligent, high-performance, downdraft extraction of fumes and of odours.

BEST EXTRACTION SPEED

All the NikolaTesla models provide a very powerful extraction speed of 5.1 m/s. They can capture all the fumes and odours before they start to rise. This feature makes these products unique in terms of efficiency and performance.



SMART SENSORS AND THAT'S ALL YOU NEED TO KNOW

The innovative Airmatic function involves the use of smart sensors which are able to detect the quantity and quality of the fumes produced and to set the most suitable extraction power accordingly.



PRACTICAL MAINTENANCE

Beauty is combined with practicality when it comes to maintenance as well. The system, patented by Elica, allows the filters to be removed from above while the internal compartment can be washed in total safety, thanks to the opening in the glass that blends in with the aesthetics.



Elica extractor hobs feature a simple and intuitive interface to allow you to enjoy the pleasure of cooking every day. The touch control panel allows the cooking areas and hood to be controlled separately and, in standby mode, it becomes totally invisible. Controlling cooking has never been so easy and convenient.



MORE SPACE FOR DRAWERS

The product design has been studied to optimise the internal spaces of the cabinet. The adjustable and positionable rear pipe, which sits flush to the back of the cabinet, makes room for deeper and more spacious drawers. The result is greater a surface area, unobstructed by the worktop, which can be used to store food or kitchen utensils.

SELF-ADJUSTING EXTRACTION

With Autocapture, you can concentrate on your recipe and leave the hood to automatically adjust based on the number and power of the hobs being used.

FAST AND EASY TO CLEAN

The smooth, seamless surface of NikolaTesla is one of the innovative features of the new generation of Elica extraction hobs. The seamless ceramic glass is an efficient design detail that also makes short work of cleaning.





IMPROVED ODOUR FILTERING CAPABILITY

This is why the NikolaTesla range, in the filtering version, features a filter with a high odour purification capacity, capable of reaching filtering thresholds over 82% compared to a market average of 60%. And to guarantee extremely easy maintenance, the filter can be regenerated for up to 3 years.

nikolatesla 18 **? elica** 19 nikolatesla

NikolaTesla has been designed to fit into many different types of kitchens. In the standard filtering version, NikolaTesla is equipped with every component needed for installation, including the exclusive chrome-plated profile that finishes the air outlet hole at baseboard. In the aspiration version, pipes are supplied as accessories and users can choose the best configuration, based on the architecture of their home. It is possible to install NikolaTesla directly against the countertop (standard) or inserted in a slot, blending in with the countertop. (Filotop).

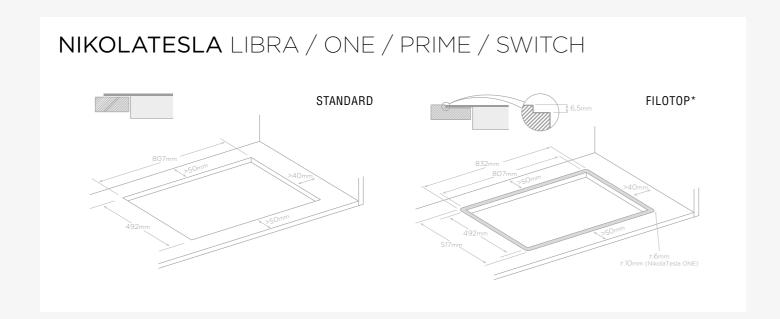

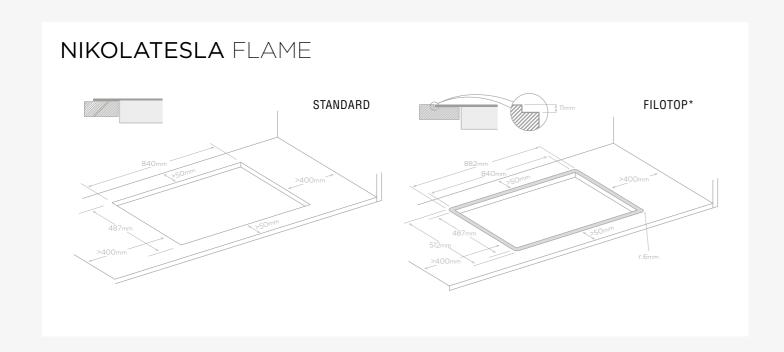

 st Recommended filotop dimensions: for different tolerances, respect the actual dimensions of the glass.

FOR FURTHER INFORMATION, CONSULT THE PRODUCT INSTALLATION MANUAL.

IN THE BOX

NikolaTesla includes everything it needs (in the standard version) for being installed in both aspiration and filtering version. Possible configurations, and related components included in the packaging, are mentioned below. For any other installation needs, bends and pipes are available as accessories.

NIKOLATESLA STANDARD DUCT-OUT MODE



NIKOLATESLA STANDARD FILTERING MODES





Thanks to the selection of accessory pipe fittings, your Nikolatesla can be configured in the way that best suits your needs.

NIKOLATESLA FILTERING MODE *









NIKOLATESLA DUCT-OUT MODE *







nikolatesla 20 **? elica** 21 nikolatesla

^{*} All images are samples installation

FOCUS ON NIKOLATESLA FOCUS ON NIKOLATESLA




By opening the cove, you can remove the three batteries of the high performance ceramic filter (regenerable) and empty the liquid collection safety compartment, which is the only component that can protect the motor in case of leakage of cooking liquids.







NikolaTesla has been conceived to guarantee maximum installation flexibility, in order to best use the cabinet internal spaces, thanks to a movable rear piping, which can be positioned close to the back, allowing for the use of deeper and more spacious drawers.


NIKOLATESLA STANDARD DUCT-OUT MODE

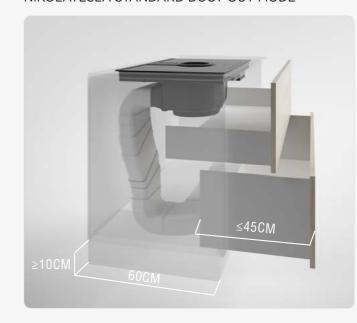

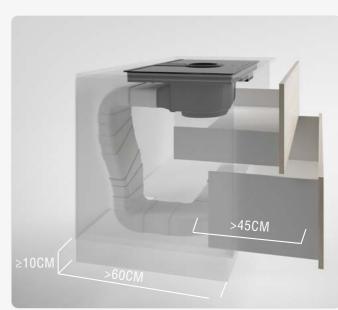

NIKOLATESLA STANDARD FILTERING MODES

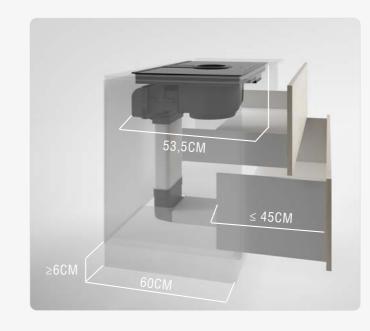



NIKOLATESLA 22 **Plica** 23 NIKOLATESLA















NIKOLATESLA SWITCH

83x51x21 cm 80,7x49,2 cm (cut) Duct-out/Filtering Black glass, white glass "ICE GREY"

The central aesthetic element in black glass and cast iron-look aluminium or white glass and steel, conceals the heart of the extraction unit which can be activated with a simple touch even in fully automatic mode, thanks to the integrated smart sensors.

The Direct Slider interface allows the various cooking and extraction areas to be controlled

simply and intuitively.

ASPIRAZIONE ASPIRATION

	DUCT-OUT	FILTERING
Controls	8S+2B slider touch control	8S+2B slider touch control
Booster airflow	630 m³/h	550 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	33 - 59 db(A)	39 - 64 db(A)
Total absorption	175 W	175 W

Grease aluminium Filter included Ceramic odour filter included (*)











ACCESSORIES

KIT0120952A Ceramic odour filter




















COOKING

Controls	9P+B slider touch control direct
Absorption	7,2 KW
Power limitation	3,1 - 4,5 kW
Voltage	220 - 240 V
Cooking zones	1 210x190 mm - 2,1/3 kW
(Size-Power)	2 210x190 mm - 2,1/3 kW
	3 210x190 mm - 2,1/3 kW
	4 210x190 mm - 2,1/3 kW
Bridge zone	2

FUNCTIONS















MODELS

NIKOLATESLA SWITCH BL/A/83	PRF0146212A
NIKOLATESLA SWITCH BL/F/83 (*)	PRF0146210A
NIKOLATESLA SWITCH WH/A/83	PRF0146216A
NIKOLATESLA SWITCH WH/F/83 (*)	PRF0146213A









NIKOLATESLA ONE

83x51x 21 cm 80,7x49,2 cm (cut) Duct-out/Filtering Black glass, white glass "ICE GREY"

> The product, winner of the 25th ADI Compasso d'Oro award, combines cutting-edge downdraft technology, to capture vapours and odours, with Elica's signature state-of-the-art design.
>
> The Direct Slider interface allows the various cooking and extraction areas

to be controlled simply and intuitively.
























	ONE HP	ONE
Controls	9P+B slider touch control direct	9P+B touch control
Absorption	7,2 KW	7,2 KW
Power limitation	4,5 kW	3,1 - 4,3 kW
/oltage	220 - 240 V	220 - 240 V
Cooking zones	1 200x180 mm - 2,1/3,7 kW	1 200x180 mm - 1,6/1,85 kV
Size-Power)	2 200x180 mm - 2,1/3,7 kW	2 200x180 mm - 2,1/3 kW
	3 200x180 mm - 2,1/3,7 kW	3 Ø200 mm - 2,3/3,0 kW
	4 200x180 mm - 2,1/3,7 kW	4 Ø160 mm - 1,2/1,4 kW
Bridge zone	2	1 loft

FUNCTIONS

ONE HP	
CHILD LOCK	TI





















NIKOLATESLA HP BL/A/83 NIKOLATESLA HP BL/F/83 (*)

PRF0120975B PRF0120976B

MODELS

	DUCT-OUT	FILTERING
Controls ONE HP	9S+B slider touch control	9S+B slider touch contr
Controls ONE	9S+B touch control	9S+B touch control
Booster airflow	640 m³/h	545 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	34 - 61 db(A)	40 - 67 db(A)
Total absorption	175 W	175 W

ASPIRATION

Grease aluminium Filter included Ceramic odour filter included (*)














Ceramic odour filter KIT0120952A







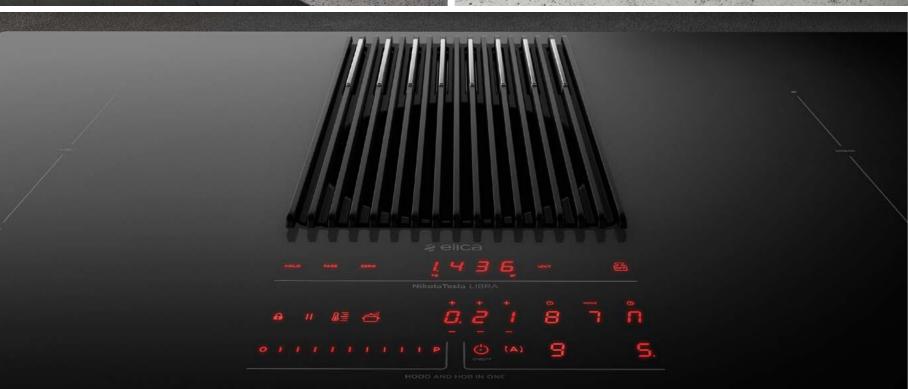



NIKOLATESLA LIBRA

83x51x21 cm 80,7x49,2 cm (cut) Duct-out/Filtering

Black glass + cast iron, white glass "ICE GREY" + cast iron



The extractor top with built-in scale. The design of the solid grids includes the down-draft extraction and weighing function which integrate seamlessly with the induction hob functions.

ASPIRATION

	7101111111111	
	DUCT-OUT	FILTERING
Controls	3S+2B slider touch control	3S+2B slider touch contro
Booster airflow	610 m³/h	545 m³/h
Suction speed	5,1 m/s	5,1 m/s
Noise level min-max	46 - 63 db(A)	48 - 67 db(A)
Total absorption	250 W	250 W

Grease aluminium Filter included Ceramic odour filter included (*)









ACCESSORIES

KIT0120952A Ceramic odour filter


























COOKING

controls	9P+B slider touch control	
bsorption	7,2 KW	
ower limitation	3,1 - 4,5 kW	
oltage	220 - 240 V	
cooking zones	1 200x180 mm - 1,6/1,85 kW	
Size-Power)	2 200x180 mm - 2,1/3 kW	
	3 200x180 mm - 2,1/3 kW	
	4 200x180 mm - 1,6/1,85 kW	
ridge zone	2	

FUNCTIONS













MODELS

NIKOLATESLA LIBRA BL/A/83	PRF0147744A
NIKOLATESLA LIBRA BL/F/83 (*)	PRF0147745A
NIKOLATESLA LIBRA WH/A/83	PRF0147774A
NIKOLATESLA LIBRA WH/F/83 (*)	PRF0147775A









NIKOLATESLA PRIME / PRIME +

83x51x21 cm 80,7x49,2 cm (cut) Duct-out/Filtering Black glass + cast iron



The sturdy, solid cast iron grid combines the design choice with the practical features of capturing steam and odours and the practical work surface.

ASPIRATION

DUCT-OUT FILTERING Controls 3S+2B slider touch control 3S+2B slider touch control 545 m³/h 610 m³/h Booster airflow 5,1 m/s Suction speed 5,1 m/s 46 - 63 db(A) 48 - 67 db(A) Noise level min-max Total absorption 250 W 250 W

Grease aluminium Filter included Ceramic odour filter included (*)









ACCESSORIES

KIT0120952A Ceramic odour filter



Controls 9P+B slider touch control 7,2 KW Absorption Power limitation 3,1 - 4,5 kW Voltage 220 - 240 V PRIME + Cooking zones 1 Ø160 mm - 1,2/1,4 kW 200x180mm - 1,65/1,85 kW 2 Ø200 mm - 2,3/3,0 kW (Size-Power) 3 Ø200 mm - 2,3/3,0 kW

200x180mm - 2,1/3 kW Ø200mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW Ø160mm - 1,2/1,4 kW

FUNCTIONS





Bridge zone















NIKOLATESLA PRIME BL/A/83 NIKOLATESLA PRIME BL/F/83 (*) NIKOLATESLA PRIME+ BL/A/83 NIKOLATESLA PRIME+ BL/F/83 (*)

PRF0138475A PRF0143159A PRF0155873A PRF0155874A













NIKOLATESLA FLAME

88x51x21 cm 84x48,7cm (cut) Duct-out/Filtering Black glass + cast iron, grey glass + cast iron

The first gas down-draft extraction top. The cast iron elements of the top are designed to combine aesthetic appeal and functionality with the utmost safety. The closed cross and flat grid supports guarantee stability with pans of any size and ease when moving on the cooking area. The cast iron filter cover doubles as a practical work surface. The wok support, available as an accessory, increases the cooking variations on NikolaTesla Flame.



	DUCT-OUT	FILTERING
Controls	3S+2B Rotative	3S+2B Rotative
Booster airflow	600 m³/h	550 m³/h
Suction speed	5,1 m/s	5,1 m/s
loise level min-max	47 - 62 db(A)	53 - 68 db(A)
otal absorption	310 W	310 W

Grease aluminium Filter included Ceramic odour filter included (*)







ACCESSORIES

Ceramic odour filter Kit wok Flame

KIT0120952A KIT0160040




















COOKING

Rotative Controls 220 - 240 V Voltage

TIPOLOGIA BRUCIATORI BURNER TYPE

1st element Dual special (3,5kW) Semi rapid (1,75 kW) Semi rapid (1,75 kW) 2nd element 3rd element Rapid (3,0 kW) 4th element

FUNCTIONS





MODELS

NIKOLATESLA FLAME BL/A/88 PRF0147740A NIKOLATESLA FLAME BL/F/88 (*) PRF0147741A NIKOLATESLA FLAME GR/A/88 PRF0147742A NIKOLATESLA FLAME GR/F/88 (*) PRF0147743A














NIKOLATESLA FIT

60x51,5x24,5 cm 72x51,5x24,5 cm 56x49 cm (cut) Duct-out Black glass



Can be built into 60-cm wide units without foregoing the hood performance, induction hob power, size and position of the base unit. The heart of the extraction unit is totally invisible and can be activated with a simple touch. The internal parts can be easily accessed to service the grease and odour filters.



ASPIRATION

Controls 3S+2B slider touch control

Booster airflow 620 m³/h

5,1 m/s Suction speed

45 - 57 db(A) Noise level min-max

Total absorption 160 W

Grease aluminium Filter included











ACCESSORIES

Ceramic odour filter KIT0167755 Filtering Kit plinth-in KIT0167756 Filtering Kit plinth-out KIT0167757

COOKING

Controls 9P+B slider touch control 7,2 KW Absorption

Power limitation 3,1 - 4,5 kW 220 - 240 V Voltage

1 200x180 mm - 2,1/3,0 kW Cooking zones (Size-Power) 2 200x180 mm - 1,6/1,85 kW

3 Ø200 mm - 2,3/3,0 kW 4 Ø160 mm - 1,2/1,4 kW

1 left Bridge zone

FUNCTIONS













MODELS

NIKOLATESLA FIT BL/A/60 PRF0167053 NIKOLATESLA FIT BL/A/72 PRF0167054 FOCUS ON NIKOLATESLA FIT FOCUS ON NIKOLATESLA FIT

Excellence in small spaces

Small spaces are becoming more and more widespread in homes now which is why multifunctional products, capable of optimising space, are excellent solutions.

Designed to meet the exacting needs of those unwilling to renounce excellence even in small spaces, NikolaTesla Fit is the first induction hob with integrated extraction that can also be installed in 60-cm wide base units with an overall surface area of 60 or 72 cm.

Elegant and functional design

A return to the origins of the essential induction hob where the surface is continuous and in standby mode. A slight pressure on the central part activates the extraction in a perfect combination of style, comfort and functionality. The compact dimensions and shape have been designed to leave space in the cabinet and total freedom of movement on the hob with pans of any kind. The heart of this efficient and silent extraction unit is totally concealed by the glass top which covers the product discretely and elegantly.



Simple cleaning and maintenance

NikolaTesla Fit is designed to be really easy to clean and maintain. The fully linear ceramic glass surface makes cleaning very quick and easy. The central aesthetic element can be removed and washed. It is also the access point for extracting the filters and carrying out maintenance. The inner compartment can be accessed in complete safety and any excess liquid can be removed thanks to a special drain valve underneath.









Full installation flexibility


Nikolatesla Fit has been designed to adapt to the most varied installation configurations. These are the main examples of the infinite range of possibilities that can be developed using the available piping on the following page.


* The pipes are available as accessories

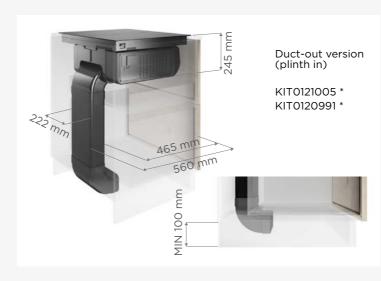



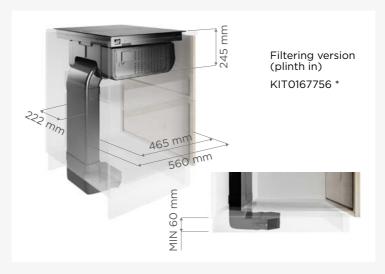

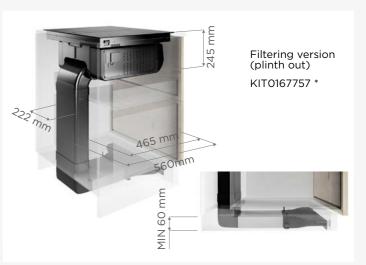

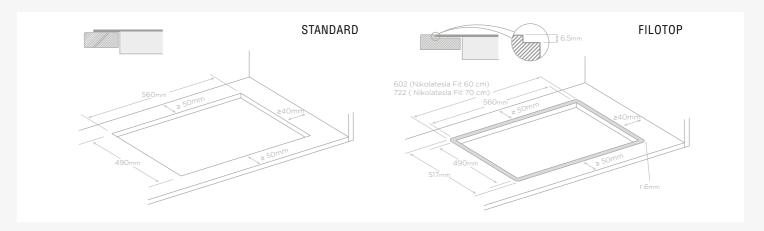

Recommended filotop dimensions: for different tolerances, respect the actual dimensions of the glass.

FOR FURTHER INFORMATION, CONSULT THE PRODUCT INSTALLATION MANUAL.

NIKOLATESLA 50 | elica

ACCESSORY PIPE FITTINGS FOR DUCT-OUT VERSION

ACCESSORIES FOR NIKOLATESLA



222x89x1000 mm KIT0120991



222x89x500 mm KIT0173527



Ø150x500 mm KIT0120996



Ø150x1000mm KIT0121000



227x94x80mm KIT0121001



15° 227x138x94 KIT0121002



Ø158X59mm KIT0121003



90° 227x288x94mm KIT0121004



90° 227x94mm KIT0121005



90° - Ø157 KIT0121006




227x94 - Ø146mm KIT0121007



227x94 - Ø153mm KIT0121008




int 216x82 / est 290x160 mm KIT0121009



190x190 - Ø147mm KIT0121010



227x94x560 mm KIT0126810



50 mm x 25 m KIT0161453

ACCESSORY PIPE FITTINGS FOR FILTERING VERSION



218x55x500 mm KIT0121012



218x55x1000 mm KIT0121013




218x55X70 mm KIT0121015



90° 218x55 mm KIT0121016



218x55X590 mm KIT0121017



AVAILABLE FOR

NIKOLATESLA ONE NIKOLATESLA PRIME NIKOLATESLA FLAME NIKOLATESLA LIBRA

50 mm x 25 m KIT0161453



Deflector under plinth KIT0168750






AVAILABLE FOR NIKOLATESLA FIT





KIT0167756 Filtering Kit plinth-in (min H6 cm)




NIKOLATESLA FIT



KIT0167757 Filtering Kit plinth-out (min H6 cm)

AVAILABLE FOR KIT0180522 NIKOLATESLA FIT Filtering Kit back outlet

NIKOLATESLA 52 **| elica**

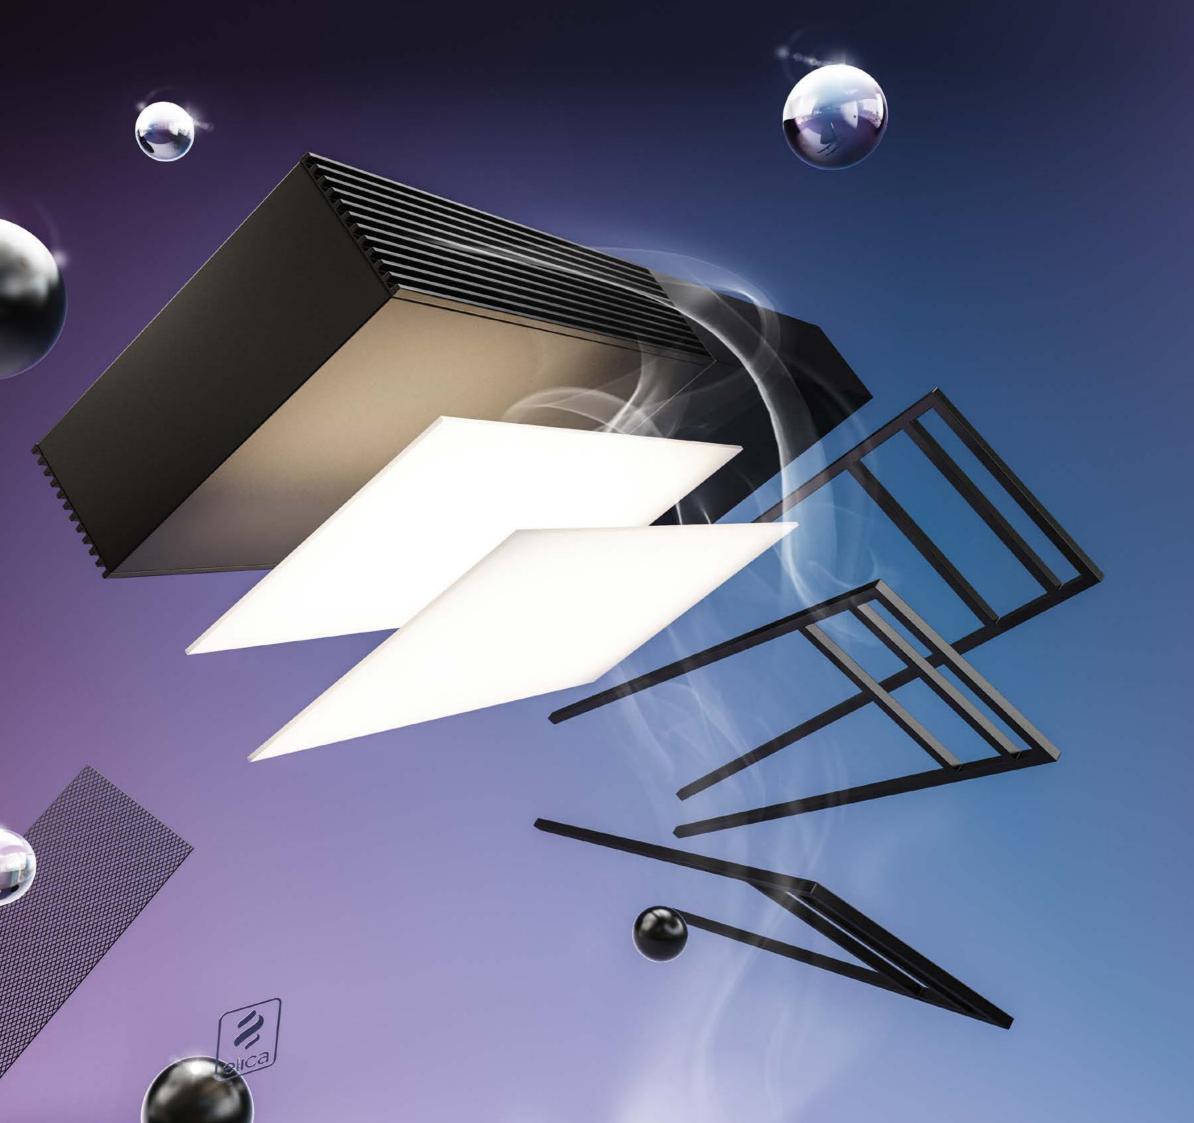



ARCH & LIGHTAIR

We live by intuitions, which become the starting point of every project and which represent the meeting point between the designer and user. It is design that gives life to these intuitions, which are transformed into products able to express themselves in intuitive ways, and continuously surprise with unexpected functions. Arch & Lightair products blend into the room's architecture, but at the same time become the protagonists themselves. They are the synthesis of vision, technology, and creativity.









OPEN SUITE SUPERIOR

ELICA CONNECT

80x424 - 160x424 cm Filtering Black soft touch effect



















Controls

Type

Intensity

Temperature

3S+2B Electronic push button

526 m³/h Booster airflow

64 - 69 db(A) Noise level min-max

261 W (80cm) - 282 W (160cm) Total absorption

Grease aluminium filter included Regenerable charcoal filter included

ACCESSORIES

Led Panel 1x14W (80cm) - 2x14W (160cm)

242 LUX (80cm) - 324 LUX (160cm)

2700K - 5200K

PERFORMANCE

	AUULUUUTIILU	
2 pieces Regenerable charcoal filter		KIT0166765
Extraction module kit Superior		KIT0167079
Full LED module kit Superior		KIT0166961
Extra-clear glass shelf kit		KIT0166455
Smoked glass shelf kit		KIT0166463
Black metal shelf kit		KIT0166470
Wire mesh shelf kit		KIT0166472
Wooden shelf kit		KIT0166475
Trellis expansion kit Superior		KIT0166962
Shelf frame kit		KIT0166768

MODELS

OPEN SUITE SUPERIOR BL/F/80 PRF0165965 OPEN SUITE SUPERIOR BL/F/160 PRF0166771











Type

Intensity

Temperature

OPEN SUITE

ELICA CONNECT





Led Panel 1x14W (80cm) - 2x14W (160cm)

242 LUX (80cm) - 324 LUX (160cm)







80 - 160 cm Filtering Black soft touch effect

















PERFORMANCE

2700K - 5200K

LIGHTING

Controls 3S+2B Electronic push button

526 m³/h Booster airflow

64 - 69 db(A) Noise level min-max

261 W (80cm) - 282 W (160cm) Total absorption

Grease aluminium filter included Regenerable charcoal filter included

า
niui cha
neral ule e kir sss si shel elf kir kit
_/F/
ct t
u e ss sl e e lf i i

2 pieces Regenerable charcoal filter	KIT0166765
Extraction module kit	KIT0167073
Full LED module kit	KIT0166964
Extra-clear glass shelf kit	KIT0166455
Smoked glass shelf kit	KIT0166463
Black metal shelf kit	KIT0166470
Wire mesh shelf kit	KIT0166472
Wooden shelf kit	KIT0166475
Trellis expansion kit	KIT0166963
Shelf frame kit	KIT0166768

ACCESSORIES

MODELS

OPEN SUITE BL/F/80 PRF0166703 OPEN SUITE BL/F/160 PRF0167007

FOCUS ON OPEN SUITE FOCUS ON OPEN SUITE

Furnishing multi-functional spaces

Innovation is sensing change and imagining tomorrow with ideas and solutions that improve people's experience of life. Open Suite is a unique product, capable of occupying space in a new, unexpected way and of offering previously unseen functionality. The extractor hood becomes part of a system made up of elements that interact and, together, offer infinite furnishing solutions in which light is the star.



Shapes, materials, and light in an innovative, modular solution



In settings in which the furniture in the living area plays an essential role, Open Suite is the perfect ally. Its modular, customisable structure, with a unique style, is immediately recognisable and adds character to the environment. The latticework is painted in soft touch black and the extractor opening features cast iron effect grids.

MODULAR DESIGN

Open Suite offers several functions: not only a hood but also light and a wide choice of shelves. It comes with four pre-set configurations (island 80cm and 160cm, wall 80cm and 160cm) that can be both a complete solution and the base from which to add accessories. The wide choice of available elements and finishings include glass shelves (clear and smoke), black metal and metallic mesh, wood (walnut or customisable), but also extractor modules and additional light panels to increase the extraction power or expand the light point across the work surface. In the island version, the height of the structure is adjustable to allow installation inside any environment, regardless of the height of the ceiling. Create your own unique version of Open Suite by playing with spaces and recreating lines and geometries according to your personal taste and the style of your furniture.

Functional and evocative light, a genuine piece of furniture

Light is one of the distinctive features of Open Suite: whilst the new installation solution effectively and silently eliminates smells from the environment, the large LED panel, powerful and efficient, ensures uniform lighting, that can be adjusted in intensity and colour temperature. This is how Open Suite becomes a strategic light point when preparing food, but also ambient lighting creating a great atmosphere for any occasion, always in perfect harmony with the surrounding space. The illuminating surface is maximised and perfectly optimised, both in the base 80cm solution and in the larger solutions equipped with additional LED panels.



ELICA CONNECT

Wifi connection

Designed to ensure the greatest freedom of movement in the kitchen, in addition to the front-positioned ergonomic controls, Open Suite is part of the line of Elica Connect intelligent hoods. Using voice commands or the Elica Connect app, you can turn the product on and off, adjust its extraction power, and modulate the intensity of the light. The App also lets you monitor the efficiency of the filters and to seek any sort of assistance with just a few clicks.



ARCH & LIGHTAIR 70 **2 Elica** 71 ARCH & LIGHTAIR

OPEN SUITE SUPERIOR (ISLAND VERSION)



OPEN SUITE SUPERIOR BL/F/80 Hood module + 1 shelf in clear glass (80cm)




OPEN SUITE SUPERIOR BL/F/160 PRF0166771 1 hood module + 1 light module + 2 shelves in clear glass(160cm)

Accessories and modularity




Both for the island version and the wall version, starting from the two base products, you can choose to customise the height of your Open Suite, adding or replacing shelves.

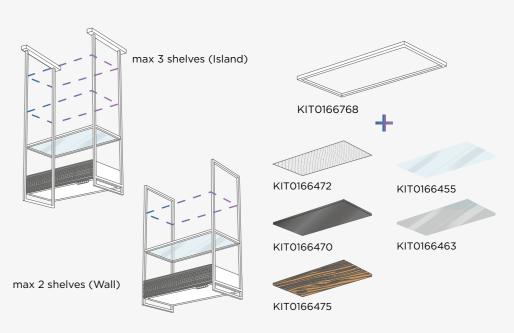



You can put together the Open Suite that best fits your environment, even creating wider versions by adding - through the latticework connectors - hood modules, light modules or shelves.

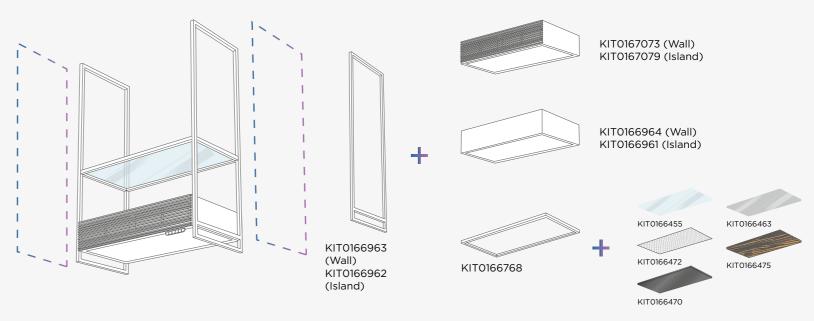

OPEN SUITE (VERSIONE A PARETE)



OPEN SUITE BL/F/80 Hood module + 1 shelf in clear glass (80cm)



1 hood module + 1 light module + 2 shelves in clear glass(160cm)

SOME ARRANGEMENT IDEAS FOR ISLAND SOLUTIONS







PRF0166703

PRF0165965





SOME ARRANGEMENT IDEAS FOR WALL SOLUTIONS













ARCH & LIGHTAIR 72 | elica

















IKONA MAXXI PURE ELICA AIR PURE

120 x 44 cm Filtering

Stainless steel, black soft touch effect

	LIGHTING
Туре	Strip Led 1x7 W
Intensity	365 LUX
Temperature	3500 K

EXTRACTION PERFORMANCE (MOTOR 1)

Controls 3S+B Electronic push button

600 m³/h Booster airflow 47 - 62 db(A) Noise level min-max 200 W

Grease aluminium filter included Regenerable charcoal filter included Hepa-Charcoal filter included



Total absorption







ACCESSORIES

Regenerable charcoal filter	CFC016222
Hepa-Charcoal filter	KIT0176157
Black chimney kit	KIT0175017
Stainless steel chimney kit	KIT0175018
Stainless steel wall installation kit	KIT0175807
Black wall installation kit	KIT0175808
Extension cable kit (5m)	KIT0147942
Extension cable kit (2,5m)	KIT0147941

PURIFICATION PERFORMANCE (MOTOR 2)

2S Electronic push button Controls For room up to 30 m²

37 - 66 db(A) Noise level min-max

175 W Total absorption Filtered particles

Dust/dust mites, animal dander, pollens, molds, sigarettes smoke, stoves combustibles, formaldehyde (paintings and coating), cooking odors.







MODELS

IKONA MAXXI PURE BL MAT/F/120 PRF0171195 IKONA MAXXI PURE IX/F/120 PRF0171196

The motor of the hood and purifier can be activated from a dedicated interface and operate alternately to each other. The chimney, available as an accessory for filtering and duct-out versions, can be installed above the hood motor, either on the right or left.

Wellness in your own home: style and pure air.



Today, the kitchen and living are a single space where we spend much of our day, in which we seek comfort and wellness through harmonious and elegant furnishings, pleasant lighting, the absence of annoying noises, but above all, the purified air that we breathe. With this in mind, Elica has created Ikona Maxxi Pure, a valuable aid in ensuring the right balance of the air quality in the living area, which will become part of your daily routine.

A multifunctional product that looks after indoor air

Ikona Maxxi Pure incorporates, in an elegant furnishing, a hood and air purifier that take twofold care of the home's air. It has been designed to improve the quality of domestic air without needing to install additional devices or complex monitoring systems which are often impractical and invasive. Ikona Maxxi Pure has been designed to allow the hood and purifier to operate independently, without compromising on either performance or usability. The "hood core" of Ikona Maxxi Pure efficiently eliminates cooking fumes and vapours. Alternatively, by activating its purifier, the air in the living area can be freed of allergens and pollutants, providing an effective aid in combating allergy symptoms and breathing ailments tied to the presence of chemical agents, offering a sense of well-being and tranquillity all throughout the day.



Super-silent air purification



Ikona Maxxi Pure is able to completely purify the air in a 30m² space in just 20 minutes. The air purifier is fitted with a special combined HEPA-carbon filter and can capture particles as small as 1 micron. It has two operating modes: "Boost" for intensive air cleaning, and "Super Silent", perfect for silently purifying the room, working in the background.



COMBO PURE FILTER (HEPA-CARBON)

The special Combo Pure Filter, a combined Hepa and carbon filter, captures polluting agents, freeing the living area of unpleasant odours and allergens such as dust, animal hair, pollen, mould, and harmful residues produced by household detergents, paints and coverings. To maintain the efficiency of air purification, the filter must be replaced more or less once per year. Ikona Maxxi Pure will remind you to change it through an alert on the user interface to ensure the air you breaths is always healthy.

A design that adapts to any living space







The timeless design of Ikona Maxxi Pure perfectly adapts to any open space area. The product is available in soft black matt or stainless steel finishes. It can be installed in a recirculating or duct-out version, suspended or wall-mounted. The attractive flue, available as an accessory, can be positioned exclusively above the hood on the right or left.

ARCH & LIGHTAIR 80 | elica | 81 ARCH & LIGHTAIR





WALL MOUNTED

A mixture of materials, placed alongside one other, to create wall-mounted hoods with a powerful extraction unit, designed to guarantee multidimensional extraction. A linear design, with vanishing points that enhance its verticality, drawing the eye up like the natural rise of the extracted fumes. Wood, like porcelain stoneware, steel and black glass, are materials that have been selected to create this attractive and functional range of hoods to enjoy every day. Conjuring up emotions.











HAIKU







LIGHTING

PERFORMANCE

Strip Led 1x7 W

253 LUX

3500 K





32 - 60 - 90 - 120 cm Duct-out Stainless steel















Temperature

Controls

Booster airflow

Intensity

Type

3S+2B Electronic push button 690 m³/h

34 - 51 db(A) Noise level min-max 277 W Total absorption

Grease aluminium filter included Chimney included

	ACCESSORIES
Charcoal filter Regenerable charcoal filter	CFC0141529A CFC0141725A
Regenerable charcoal filter	CFC0141725A

MODELS HAIKU IX/A/32 PRF0146254 PRF0146255 HAIKU IX/A/60 HAIKU IX/A/90 PRF0146256 HAIKU IX/A/120 PRF0146257



Possibility for installation in extraction or filtration mode, without the aid of the upper chimney, remaining within a height of 680 mm

FOCUS ON HAIKU FOCUS ON HAIKU

Harmony and simplicity

The aesthetic linearity can be seen in the cast iron effect aluminium grilles, which strongly characterise the product. They are easy to remove and are equipped with a blocking system designed to avoid accidental falls. The proposed materials and continuous surfaces allow fast and efficient cleaning, even after more intense cooking sessions.





Metric visions


Thanks to the sizes in which it is proposed, Haiku is perfect for a range of design solutions. It is available in both a wall-mounted version (32, 60, 90 and 120 cm) and island version (32, 120, 180 cm), in both an extractor and filtration version.

Shift 3238 system - the only system with adjustable depth

Elica was the first in the market to propose an innovative wall-mounted bracket system in Haiku SHIFT 3238, thanks to which installation operations have been largely simplified. Haiku can be positioned either in line with the shelves or in such a way as to increase the work space on the hob. SHIFT 3238 allows the millimetric adjustment of the hood body depth. Limitations simply disappear and aesthetic solutions multiply, as do the advantages of cleaning operations.





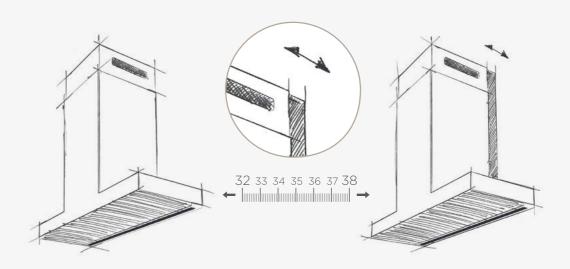

WALL MOUNTED 88 | elica elica 89 WALL MOUNTED















SWEET

Duct-out, Filtering

Painted: matt white, matt umber. ivory, matt copper, peltrox, cast iron





















Type

Intensity

Temperature

Noise level min-max

PERFORMANCE 3S+B Infrared touch control Controls 580 m³/h Booster airflow

Total absorption 207 W

Grease aluminium filter included Regenerable charcoal filter included (*) Extension chimney included (Duct-out)

ACCESSORIES CFC0140426 Regenerable charcoal filter MODELS PRF0167320 PRF0043030A SWEET WHITE/A/85+CAM SWEET WHITE F/85 (*) SWEET UMBER/A/85+CAM PRF0167321 SWEET UMBER F/85 (*) PRF0043031A SWEET IVORY/A/85+CAM PRF0167322 SWEET IVORY F/85 (*) PRF0043033A SWEET COPPER/A/85+CAM PRF0167324 SWEET COPPER/F/85 (*) PRF0120672A SWEET PELTROX/A/85+CAM PRF0167323 PRF0120689A SWEET PELTROX/F/85 (*) SWEET CAST IRON/A/85+CAM PRF0167319 SWEET CAST IRON/F/85 (*) PRF0120702A


LIGHTING

Strip Led 1x7 W

197 LUX

4000 K

46 - 61 db(A)





The use of engineering plastics makes it possible to create the soft contours typical of the Sweet design. Available in both a filtration version without flue extension and extraction version with flue extension kit included in the packaging.











ADÉLE

60 - 90 cm Duct-out


Stainless steel + black glass, black soft touch effect + black glass











LIGHTING STRIP LED 1x7 W

421 LUX Intensity 3000 K Temperature

Type

PERFORMANCE

Controls 3S+B Capacitive touch control

Booster airflow 770 m³/h 55 - 69 db(A) Noise level min-max

Total absorption 277 W

Grease aluminium filter included Chimney included

ACCESSORIES


Charcoal filter CFC0141529A CFC0141725A Regenerable charcoal filter Stainless steel chimney extension kit H81 KIT00780 Black chimney extension kit H81 KIT0181149

MODELS

ADÉLE BLIX/A/60 PRF0167314 ADÉLE BLIX/A/90 PRF0167315 ADÉLE BL MAT/A/60 PRF0167318 ADÉLE BL MAT/A/90 PRF0167317









FLICA DESIGN CENTER

| 60 - 90 cm | Duct-out | Stainless steel + white glass, stainless steel + black glass














	LIGHTING
Туре	Led 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
	PERFORMANCE
Controls	3S+B Capacitive touch control
Booster airflow	713 m³/h
Noise level min-max	51 - 69 db(A)
Total absorption	265 W

Grease aluminium filter included Chimney included

ACCES	SSORIES
harcoal filter	CFC0141529A
egenerable charcoal filter	CFC0141725A
tainless steel chimney extension kit H81	KIT00780
MO	DFLS

	MODELS
JOY BLIX/A/60	PRF0104625A
JOY BLIX/A/90	PRF0104626A
JOY WHIX/A/60	PRF0104630A
JOY WHIX/A/90	PRF0104631A







GALAXY

ELICA DESIGN CENTE

80 cm Duct-out


Duct-out
Stainless steel + black glass, stainless steel + white glass











	LIGHTING	
Туре	Led 2x2,5 W	
Intensity	145 LUX	
Temperature	3500 K	
	PERFORMANCE	
Controls	3S+B Capacitive touch control	
Booster airflow	647 m³/h	
Noise level min-max	52 - 69 db(A)	
Total absorption	265 W	
Grease aluminium filter	included	

Charcoal filter Regenerable charcoal filter	CFC0141529A CFC0141725A	
	MODELS	
GALAXY BLIX/A/80 GALAXY WHIX/A/80	PRF0008948B PRF0009822B	

ACCESSORIES

WALL MOUNTED 98 | elica 99 WALL MOUNTED









SPOT URBAN

90 cm Duct-out

Cast iron effect metal, zinc coating effect metal




















In line with latest kitchen trends, where industrial and urban design is continuously gaining ground, Elica has developed new combinations of finishes allowing the hood to be perfectly integrated with this style.

LIGHTING

Type Led 2x2,5 W Intensity 381 LUX Temperature 3500 K

Controls

Total absorption

PERFORMANCE

3S Mechanical push button

255 W

630 m³/h Max airflow Noise level min-max 52 - 71 db(A)

Grease aluminium filter included Chimney included

ACCESSORIES CFC0141529A Charcoal filter Regenerable charcoal filter CFC0141725A

MODELS SPOT URBAN CAST IRON/A/90

PRF0147736 SPOT URBAN ZINC/A/90 PRF0147737



SPOT NG


60 - 90 - 120 cm Duct-out Stainless steel











LIGHTING Led 2x2,5 W (60cm,90cm) - Led 3x2,5 W (120cm) Type Intensity 381 (60cm,90cm) - 571 LUX (120cm) Temperature

PERFORMANCE

Controls 3S Mechanical push button

368 m³/h Max airflow 55 - 62 db(A) Noise level min-max

Total absorption 140 W (60cm,90cm) - 142.5 W (120cm)

Grease aluminium filter included Chimney included

SPOT NG H6 IX/A/120

ACCESSORIES CFC0141529A Charcoal filter CFC0141725A Regenerable charcoal filter KIT00780 Stainless steel chimney extension kit H81

MODELS SPOT NG H6 IX/A/60 55916388A 55916389A SPOT NG H6 IX/A/90

PRF0099407A

WALL MOUNTED 100 #elica elica 101 WALL MOUNTED



TRIBE

60 - 90 cm Duct-out Stainless steel + glass
















	LIGHTING
Туре	Led 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
	PERFORMANCE
Controls	3S+B Electronic push button with display
Booster airflow	600 m³/h

48 - 64 db(A)

Grease aluminium filter included Chimney included

Noise level min-max

Total absorption

ACCESSORIES	
Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MOI	DELS
TRIBE A IX/A/60	PRF0150292
TRIBE A IX/A/90	PRF0150291




FLAT GLASS

60 - 90 cm Duct-out Stainless steel + glass









LIGHTING	
Туре	Led 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
	PERFORMANCE
Controls	3S Mechanical push button
Max airflow	368 m³/h
Noise level min-max	55 - 62 db(A)
Total absorption	140 W

Grease aluminium filter included Chimney included

SSORIES
CFC0141529A
CFC0141725A
KIT00780
DDELS
68516391A
68516390A

elica 103 WALL MOUNTED WALL MOUNTED 102 | elica



REEF

60 - 90 cm Duct-out Stainless steel + glass















	LIGHTING
Туре	Led 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
	PERFORMANCE
Controls	3S+B Electronic push button with display

Booster airflow 600 m³/h 48 - 64 db(A) Noise level min-max Total absorption 205 W

Grease aluminium filter included Chimney included

ACCESSURIES	
Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MO	DDELS
REEF A IX/A/60	PRF0150289
REEF A IX/A/90	PRF0150288




60 - 90 cm Duct-out Stainless steel + glass











Туре	Led 2x2,5 W
Intensity	381 LUX
Temperature	3500 K
	PERFORMANCE
Controls	3S Mechanical push button
Max airflow	368 m³/h
Noise level min-max	55 - 62 db(A)
Total absorption	140 W

LIGHTING


Grease aluminium filter included Chimney included


≱ elica

ACCE	SSORIES
Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
MO	DDELS
CIRCUS IX/A/60	68116393A
CIRCUS IX/A/90	68116392A

WALL MOUNTED 104 | elica elica 105 WALL MOUNTED



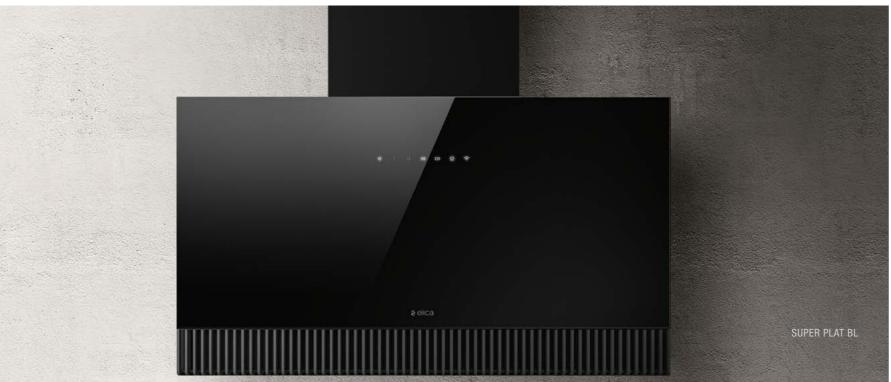

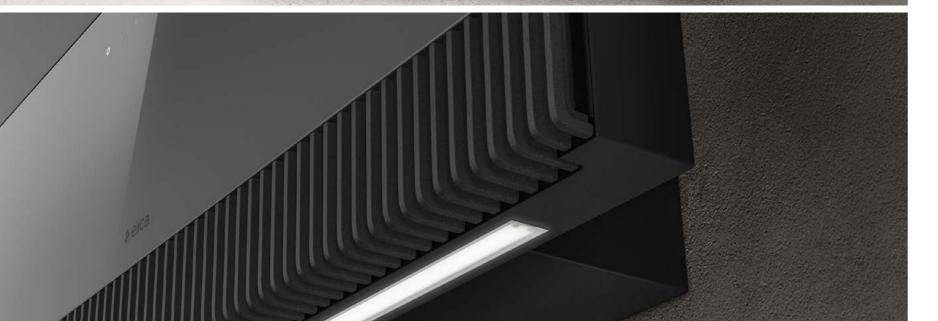



SUPER PLAT

ELICA CONNECT





80 cm Filtering

Black glass, grey glass + cast iron effect


















Super Plat heightens the user's sense of freedom, offering more time to concentrate on cooking thanks to the smart wireless system. The hood can be used either through the Elica Connect app or with a smart speaker, giving and receiving information.

LIGHTING

Strip Led 1x7 W Type 197 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+2B Capacitive touch control

740 m³/h Booster airflow 37 - 57 db(A) Noise level min-max Total absorption 277 W

Grease aluminium filter included Regenerable charcoal filter included

ACCESSORIES

Regenerable charcoal filter (*) Stainless steel chimney kit Black chimney kit (*) order 3 pieces

CFC0140423 KIT0171543 KIT0166364

MODELS PRF0164980

SUPER PLAT GR/F/80

SUPER PLAT BL/F/80

PRF0165017

FOCUS ON SUPER PLAT FOCUS ON SUPER PLAT

Unique combination of form and material

The new Super Plat model is a hood characterised by simple and modern lines. It's a response to the demand for an electrical appliance, which, despite remaining true to its identity, perfectly blends into the style of the kitchen where it's installed, without interrupting the continuity of forms and surfaces. Its design makes it perfect for installation either as a stand-alone or between cabinets. It offers broad flexibility of use: it is originally a recirculating hood, but with the addition of stylish flues can easily be transformed into a duct-out version. Super Plat is available in black or grey glass, combined with cast iron effect elements to make it a genuine feature item in the kitchen.






Top performance

Super Plat exploits Elica's Multi-d Capture technology: extraction is no longer concentrated in one specific zone but rather distributed across the entire perimeter of the front surface. As such, the extraction capacity reaches the highest levels and is able to guarantee excellent results in terms of clearing the air of unpleasant vapours and smells. Despite its powerful motor, Super Plat is extremely quiet even at the highest speed thanks to the Comfort Silence technology, which reduces the noise level during use of the hood in all household situations.



Wi-Fi connection **ELICA CONNECT**

Thanks to its Wi-Fi module, Super Plat is always connected to a cloud at your service. Using the Elica Connect app, you can control the extraction speed, all light functions and even monitor the product's status. The app provides you with access to tools that help keep your product running clean and efficiently over time. What's more, Super Plat can be connected with the most popular smart speakers so you can control it with your own voice.

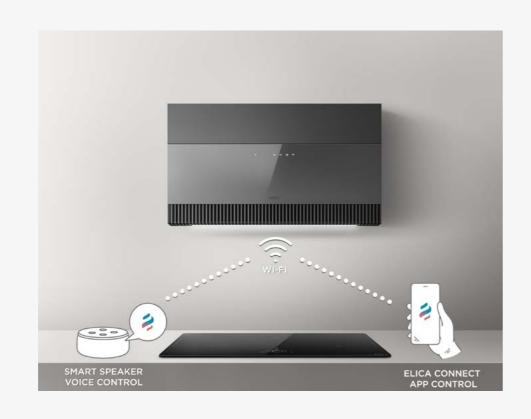



Easy to clean

Super Plat is designed to make standard cleaning and maintenance operations simpler, faster and safer for the user. The absence of any visible mechanical parts when the front panel is opened greatly simplifies maintenance operations: users have direct access to the inside of the product and are free to move without any obstructions. The grates are easy to remove for total sanitisation.

elica 111 WALL MOUNTED WALL MOUNTED 110 | elica











PLAT

55 - 80 cm Filtering Black glass, white glass


















LIGHTING

STRIP LED 1x7 W Type 365 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+B Capacitive Touch-control

Booster airflow 710 m³/h 37 - 57 db(A) Noise level min-max Total absorption 277 W

Grease aluminium filter included Regenerable charcoal filter included

ACCESSORIES

Regenerable charcoal filter (*) Stainless steel chimney kit Black chimney kit (*) for version 55, order 2 pieces (*) for version 80, order 3 pieces CFC0140423 KIT0171543 KIT0166364

PRF0165707

PRF0165712

MODELS PLAT BL/F/55 PRF0164946 PLAT BL/F/80 PRF0164874

PLAT WH/F/55

PLAT WH/F/80













RULES

60 - 90 - 120 cm Filtering

Black glass, "Sirius" black Dekton, coverable




















The NAKED version of Rules is a unique model that can be personalised to suit customer needs. It can be finished with the same material used for your kitchen (The panel used must not exceed the total weight of 4kg). The images shown are only an example of the possible solutions.













LIGHTING

STRIP LED 2x7 W (DEKT - NAKED) STRIP LED 1x7 W (BL) Type 365 (BL) - 310 (DEKT-NAKED) LUX Intensity 3500 K

Temperature

PERFORMANCE

DEKT / NAKED 3S+B Capacitive Touch-control 3S+B Electronic push button Controls

Booster airflow 700 m³/h 700 m³/h Noise level min-max 40 - 58 db(A) 40 - 58 db(A)

Total absorption 277 W 280 W

Grease aluminium filter included Regenerable charcoal filter included

Regenerable charcoal filter (*) CFC0166361 Stainless steel chimney kit KIT0171543 Black chimney kit KIT0166364

(*) for version 60, order 2 pieces (*) for version 90, order 3 pieces

(*) for version 120, order 4 pieces

MODELS

RULES BL/F/60	PRF0163752	
RULES BL/F/90	PRF0163751	
RULES BL/F/120	PRF0163753	
RULES DEKT/F/60	PRF0163755	
RULES DEKT/F/90	PRF0163754	
RULES DEKT/F/120	PRF0163756	
RULES NAKED/F/60	PRF0163758	
RULES NAKED/F/90	PRF0163757	
RULES NAKED/F/120	PRF0163759	

FOCUS ON RULES




Stand-alone or integrated thanks to adjustable depth

Today's kitchens, dominated by clean and essential lines, require flexible design concepts able to maximise space. Hence Rules was born, designed to be in harmony with the kitchen project. This new model guarantees a completely customisable solution thanks to the innovative system allowing millimetric modulation of its depth during installation. When reduced to the minimum thickness of 21 cm, Rules becomes a stand-alone and almost disappears into the wall; when the depth is increased to 36 cm, it perfectly aligns with cabinets of any depth. The dimensions of Rules are the same as those of standard cabinets with height 36 cm, allowing complete integration with all kitchen compositions.





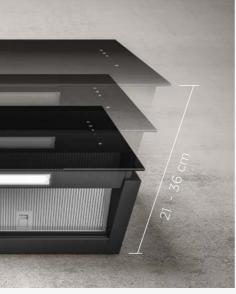

A tailor-made outfit



A broad selection of available finishes, designed to bring out the best in every space. The version in black glass dresses the product with a minimalist and elegant design. For those looking for total integration with their kitchen furniture there's the naked version, which can be clad with the same door as the cabinets, thus totally concealing and disguising the product among the kitchen cabinets. For a more determined hood there's the version in black DEKTON® Sirius, designed to recreate a total look in the kitchen. A durable, resilient material that's easy to maintain, adding a sophisticated and modern feel to every space.



Easy to clean

Rules comes with patented tilted grates, which thanks to their special structure, capture drops of condensate and convey them to a collection tray. When deep cleaning is required, the water tray can be removed and sanitised without the need for any tools. The linear design of Rules makes it extremely easy to clean. All the finishes can easily be treated with water and a neutral soap. By simply removing the grease filter, it's possible to reach the inside of the hood to service the filters.

WALL MOUNTED 122 POICA 123 WALL MOUNTED













BLOOM-S

85 cm Duct-out

White glass, "Sirius" black Dekton




















The front part of the hood is characterised by a mobile, manually operated visor, which allows increased fume extraction during cooking. The Dekton version, thanks to the characteristics of this material, is highly resistant to UV rays, scratches and dents.

	LIGHTING
Туре	STRIP LED 1x7 W
Intensity	365 LUX
Temperature	3500 K

PERFORMANCE

Controls 3S+2B Infrared touch control

Booster airflow 750 m³/h 35 - 53 db(A) Noise level min-max Total absorption 277 W

Grease aluminium filter included Chimney included

	ACCESSORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
	MODELS	
BLOOM-S WH/A/85	PRF0164490	
BLOOM-S DEKT/A/85	PRF0164475	













MAJESTIC NO DRIP

60 - 90 cm Duct-out Black glass + stainless steel


















The hood features a heating element system that allows the glass to heat up, thus reducing the formation of condensate. Any residual condensate is then collected in a dedicated manifold.

	LIGHTING	
Туре	Strip Led 1x7 W	
Intensity	253 LUX	
Temperature	3500 K	
	PERFORMANCE	
Controls	3S+B Capacitive touch control	

Booster airflow 600 m³/h 46 - 60 db(A) Noise level min-max

207 W

Grease aluminium filter included Chimney included

Total absorption

	ACCESSORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
White remote control	KIT0121468	
Black remote control	KIT0121469	
	MODELS	
MAJESTIC NO DRIP BL/A/60	PRF0147731	
MAJESTIC NO DRIP BL/A/90	PRF0147732	











75 cm Filtering White glass, black glass
























When activated, the central ring electronically shifts inward, thus allowing the hood to activate perimeter extraction.

LIGHTING

Туре Strip Led 1x7 W Intensity 113 LUX Temperature 4000 K

PERFORMANCE

3S+B Capacitive touch control Controls

650 m³/h Booster airflow Noise level min-max 42 - 60 db(A)

Total absorption 247 W

Grease aluminium filter included Charcoal filter included

ACCESSORIES

Charcoal filter CFC0140343 Regenerable charcoal filter CFC0162221 KIT0010439 Long chimney kit KIT0010700 Short chimney kit

MODELS

OM AIR BL/F/75 PRF0094744 OM AIR WH/F/75 PRF0094734



VERTIGO

90 - 120 cm Filtering White glass, black glass


















LIGHTING STRIP LED 1x7W Type 301 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+B Infrared touch control Booster airflow 610 m³/h

50 - 66 db(A) Noise level min-max Total absorption 267 W

Grease aluminium filter included Charcoal filter included

VERTIGO WH/F/120

ACCESSORIES CFC0140343 Charcoal filter CFC0162221 Regenerable charcoal filter KIT0177845 Stainless steel chimney kit MODELS VERTIGO BL/F/90 PRF0079553C VERTIGO BL/F/120 PRF0079555C VERTIGO WH/F/90 PRF0079554C

PRF0079556C

WALL MOUNTED 130 #elica elica 131 WALL MOUNTED











Type

Intensity

Controls

Booster airflow

Temperature

BLOOM

85 cm Duct-out Black glass, grey glass















35 - 56 db(A) Noise level min-max Total absorption 277 W Grease aluminium filter included Chimney included

ACCESSORIES		
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
	MODELS	
BLOOM BL/A/85	PRF0164459	
BLOOM GR/A/85	PRF0164462	

LIGHTING

PERFORMANCE


3S+B Capacitive touch control

STRIP LED 1x7 W

253 LUX

3500 K

750 m³/h





The front part of the hood is characterised by a mobile, manually operated visor, which allows increased fume extraction during cooking.













APLOMB

60 - 90 cm Duct-out Black glass, white glass
















The Aplomb Switch Off Delay is a smart timer function allowing the user to programme the automatic shut-down of the selected speed after a pre-set time. Moreover, the hood features a front panel support system, which means it can be kept open when performing routine or corrective maintenance on the product.

	LIGHTING
Туре	STRIP LED 1x3 W
Intensity	84 LUX
Temperature	3500 K
	PERFORMANCE
Controls	3S+B Capacitive touch control

Booster airflow 680 m³/h 51 - 64 db(A) Noise level min-max Total absorption 233 W

Grease aluminium filter included Chimney included

	ACCESSORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
	MODELS	
APLOMB BL/A/60	PRF0166938	
APLOMB BL/A/90	PRF0166939	
APLOMB WH/A/60	PRF0166940	
APLOMB WH/A/90	PRF0166941	







STRIPE

60 - 90 cm Duct-out Black glass, white glass, stainless steel


















LIGHTING

2.0111110		
Туре	Led 2x2,5 W	
Intensity	203 LUX	
Temperature	3000 K	
	PERFORMANCE	

BL/WH Controls 3S+B Capacitive touch control 3S+B Electronic push button

Booster airflow 757 m³/h 50 - 65 db(A) Noise level min-max 265 W Total absorption

Grease aluminium filter included Chimney included

	ACCESSORIES
Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
	MODELS
STRIPE IX/A/60	PRF0110514B
STRIPE IX/A/90	PRF0110515B
STRIPE BL/A/60	PRF0101142B
STRIPE BL/A/80	PRF0164806
STRIPE BL/A/90	PRF0101143B
STRIPE WH/A/60	PRF0101144B
STRIPE WH/A/80	PRF0164805
STRIPE WH/A/90	PRF0101145B







SHIRE

60 - 90 cm Duct-out Black glass, white glass














Туре	Led 2x1 W
Intensity	120 LUX
Temperature	3500 K
	PERFORMANCE
Controls	2S+B Capacitive touch control
Booster airflow	650 m³/h
Noise level min-max	52 - 64 db(A)

232 W

LIGHTING

Grease aluminium filter included Chimney included

Total absorption

ACCESSORIES			
Charcoal filter	CFC0140343		
Regenerable charcoal filter	CFC0162221		
	MODELS		
SHIRE BL/A/60	PRF0119819A		
SHIRE BL/A/90	PRF0119829A		
SHIRE WH/A/60	PRF0119823A		
SHIRE WH/A/90	PRF0119828A		
SHIRE BK/A/60 NO PLUG	PRF0143990A		
SHIRE BK/A/90 NO PLUG	PRF0143994A		
SHIRE WH/A/60 NO PLUG	PRF0144000A		
SHIRE WH/A/90 NO PLUG	PRF0144002A		

WALL MOUNTED 136 | elica elica 137 WALL MOUNTED







SHEEN-S

60 - 90 cm Duct-out Black glass, white glass


















The Switch Off Delay is a smart timer function allowing the user to programme the automatic shut-down of the selected speed after a

LIGHTING

Type Led 2x1,5 W Intensity 180 LUX Temperature 3500 K

PERFORMANCE

Controls 3S+B Capacitive touch control

650 m³/h Booster airflow Noise level min-max 52 - 65 db(A)

233 W Total absorption

Grease aluminium filter included Chimney included

SHEEN-S WH/A/90

ACCESSORIES		
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
	MODELS	
SHEEN-S BL/A/60	PRF0166928	
SHEEN-S BL/A/90	PRF0166929	
SHEEN-S WH/A/60	PRF0166930	

PRF0166931







SHY-S

60 - 90 cm Duct-out

Black glass, white glass
















The Switch Off Delay is a smart timer function allowing the user to programme the automatic shut-down of the selected speed after a pre-set time.

	LIGHTING	
Туре	Led 2x1,5 W	
Intensity	180 LUX	
Temperature	3500 K	
	PERFORMANCE	
Controls	3S+B Capacitive touch control	

650 m³/h Booster airflow Noise level min-max 52 - 65 db(A) 233 W Total absorption

Grease aluminium filter included Chimney included

ACCESSORIES			
Charcoal filter	CFC0140343		
Regenerable charcoal filter	CFC0162221		
MODELS			
SHY-S BL/A/60	PRF0166932		
SHY-S BL/A/90	PRF0166933		
SHY-S WH/A/60	PRF0166934		
SHY-S WH/A/90	PRF0166935		

WALL MOUNTED 138 | elica



TAMAYA 2.0 S

60 - 90 cm Duct-out Stainless steel














Туре	Led 2x2,5W
Intensity	381 LUX
Temperature	3500K
	PERFORMANCE
Controls	3S+I Touch control with display
Booster airflow	750 m³/h
Noise level min-max	52 - 68 db(A)
Total absorption	250 W
Grease aluminium filter inc	cluded
Chimney included	
	ACCESSORIES
Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
	MODELS
TAMAYA 2.0 S IX/A/60	PRF0176778
TAMAYA 2.0 S IX/A/90	PRF0176781

LIGHTING




MISSY

60 - 90 cm Duct-out Stainless steel










LIGHTING			
ype	Led 2x3 W		
ntensity	97 LUX		
emperature	2700 K		
PERFORMANCE			
Controls	3S Mechanical slider		
lax airflow	395 m³/h		
loise level min-max	49 - 68 db(A)		
otal absorption	96 W		

Grease aluminium filter included Chimney included

	ACCESSORIES	
Charcoal filter	CFC0141497	
	MODELS	
MISSY IX/A/60 MISSY IX/A/90	PRF0004024C PRF0004022C	

WALL MOUNTED 140 | elica

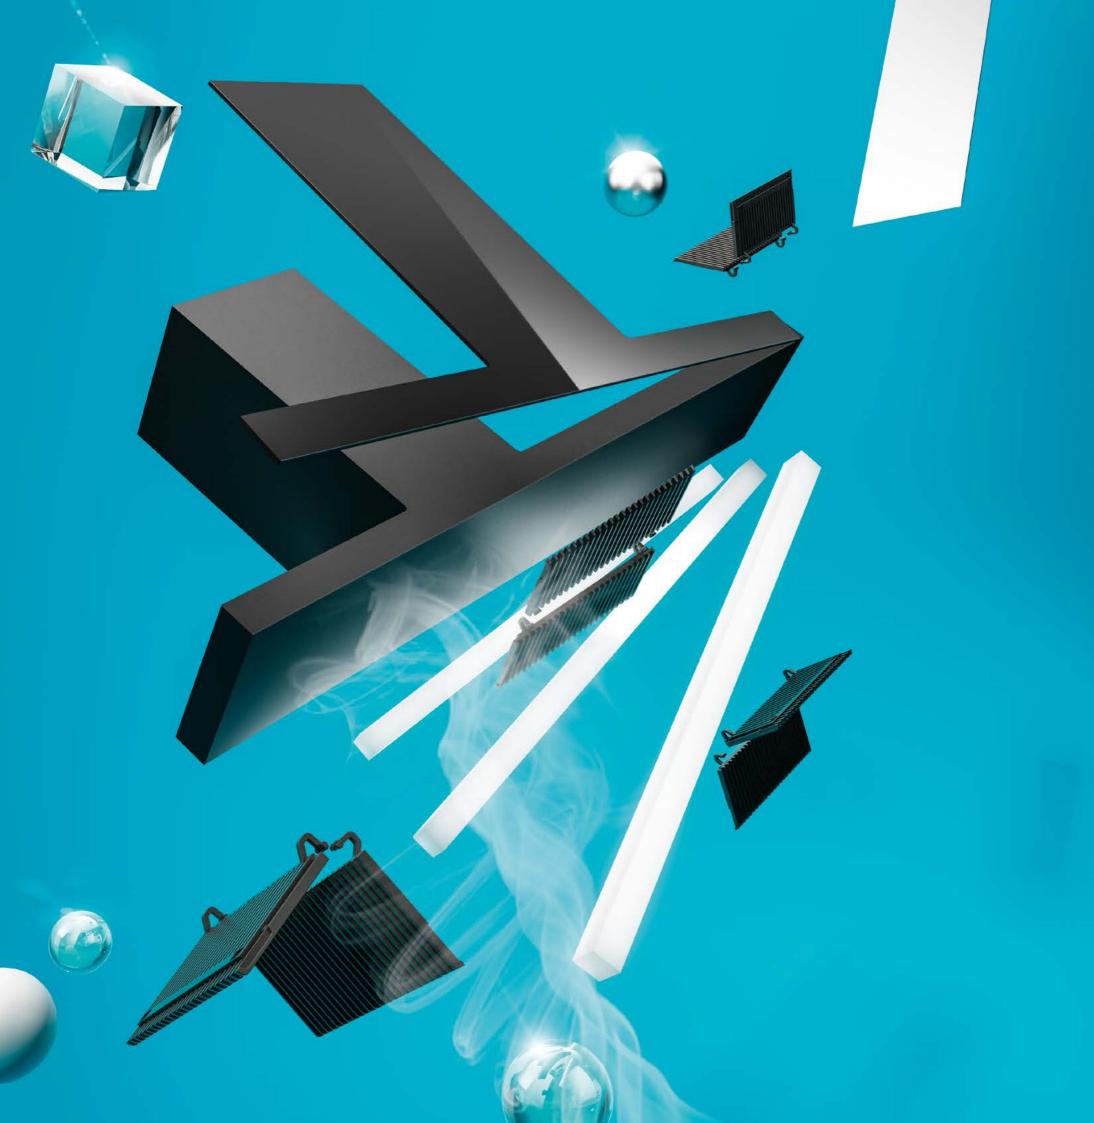



ISLAND MOUNTED

Elica island hoods are genuine design accessories which reflect personal style and add character to the kitchen Thanks to their extreme versatility and modularity, they can be composed based on your personal tastes and used as a statement feature in the kitchen. Wood, steel and glass: a whole host of possibilities which turn us into our own kitchen designers creating a unique style. Designed to thrill











HAIKU ISLAND

32x32 - 120x32 - 180x32 cm Duct-out Stainless steel









Type

Intensity

Temperature

Grease aluminium filter included Chimney included

Charcoal filter Regenerable charcoal filter

> PRF0146277 HAIKU ISLAND IX/A/32 PRF0146279 PRF0146280

LIGHTING

Strip Led 1x7 W 365 LUX 3500 K

PERFORMANCE

3S+2B Electronic push button 690 m³/h

Noise level min-max 34 - 51 db(A)


277 W Total absorption

ACCESSORIES

CFC0141529A CFC0141725A

MODELS

HAIKU ISLAND IX/A/120 HAIKU ISLAND IX/A/180

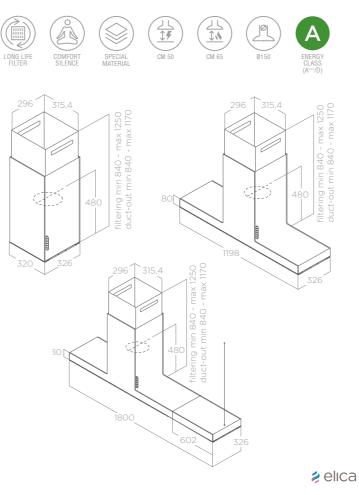









ADÉLE ISLAND

90x60 cm Duct-out


Stainless steel + black glass, black soft touch effect + black glass











LIGHTING

Strip Led 2x7 W 309 LUX Type Intensity Temperature 3000 K

PERFORMANCE

3S+B Capacitive touch control Controls

770 m³/h Booster airflow 55 - 69 db(A) Noise level min-max Total absorption 277 W

Grease aluminium filter included Chimney included

ACCESSORIES

CFC0141529A CFC0141725A Charcoal filter Regenerable charcoal filter

MODELS

ADÉLE IS BLIX/A/90 X 60 PRF0167313 ADÉLE IS BL MAT/A/90 X 60 PRF0167316







JOY ISLAND

90x61 cm

Duct-out Stainless steel + black glass, stainless steel + white glass
















Туре	Led 4x2,5 W	
Intensity	761 LUX	
Temperature	3500 K	
	PERFORMANCE	
Controls	3S+B Capacitive touch control	
Booster airflow	713 m³/h	
Noise level min-max	51 - 69 db(A)	
Total absorption	270 W	
Grease aluminium filter ind Chimney included	cluded	
	ACCESSORIES	
Charcoal filter	CFC0141529A	
Regenerable charcoal filter	CFC0141725A	
	MODELS	
JOY ISLAND BLIX/A/90	PRF0104628A	
JOY ISLAND WHIX/A/90	PRF0104629A	

LIGHTING



GALAXY ISLAND

90x45 cm Duct-out


Stainless steel + black glass, stainless steel + white glass











уре	Led 4x2,5 W	
ntensity	290 LUX	
emperature	3500 K	
	PERFORMANCE	
ontrols	3S+B Capacitive touch control	
ooster airflow	647 m³/h	
oise level min-max	52 - 69 db(A)	
otal absorption	270 W	
One and all residences filled in about a		

LIGHTING

Grease aluminium	filter	included
Chimney included		

Charcoal filter Regenerable charcoal filter	CFC0141529A CFC0141725A	
	MODELS	
GALAXY ISLAND BLIX/A/90x45 GALAXY ISLAND WHIX/A/90x45	PRF0017852B PRF0019192B	

ACCESSORIES

ISLAND MOUNTED 150 | elica











IKONA

60x44cm Duct-out Black soft touch effect














	LIGHTING	
уре	STRIP LED 1x7W	
itensity	365 LUX	
emperature	3500 K	
	PERFORMANCE	

Controls	3S+B Electronic push button
Booster airflow	610 m³/h
Noise level min-max	47 - 62 db(A)
Total absorption	207 W

Grease aluminium filter included

ACCESSORIES		
Charcoal filter CFC0140343		
Regenerable charcoal filter	CFC0162221	
MODELS		
IKONA BL MAT/A/60 PRF0164784		



TRIBE ISLAND

90x60 cm Duct-out Stainless steel + glass
















Туре	Led 2x2,5 W
Intensity	381 LUX
Temperature	3000 K
	PERFORMANCE
Controls	3S+B Electronic push button with display
Booster airflow	600 m³/h
Noise level min-max	48 - 64 db(A)
Total absorption	205 W
Grease aluminium filter inc Chimney included	luded
	ACCESSORIES
Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
	MODELS

PRF0150293

TRIBE A ISLAND IX/A/90X60

LIGHTING



REEF ISLAND


90x60 cm Duct-out Stainless steel + glass











LIGHTING			
ype Led 2x2,5 W			
itensity	381 LUX		
emperature	3000 K		
	PERFORMANCE		
ontrols	3S+B Electronic push button with display		
ooster airflow 600 m³/h			
oise level min-max	48 - 64 db(A)		
otal absorption	205 W		

Grease	aluminium	filter	included
Chimne	v included		

ACCESSORIES		
Charcoal filter CFC0141529A		
Regenerable charcoal filter	CFC0141725A	
MODELS		
REEF A ISLAND IX/A/90X60	PRF0150290	

ISLAND MOUNTED 156 # elica





CEILING

We want a home that reflects who we are, in which every single accessory is an expression of ourselves. from the coloured cable to the atmospheric light. We want solutions that surprise us and surprise others.

Elica ceiling hoods are the solution that can discretely disappear into the ceiling or become a key lighting feature. An architectural and lighting project that combines the best extraction technology with an intelligent use of light in the home.

FOCUS ON CEILING FOCUS ON CEILING

A NEW POINT OF LIGHT AND VIEW




The latest interior architectural projects have seen the gradual shift away from traditional kitchens in terms of just a room, in favour of an open-space solution included in a living area. This change of layout has also revolutionised the design of electrical appliances which have benefited from a major transformation in terms of aesthetic and functional design.

In a setting in which significant importance is placed on the perfect integration between all the elements which furnish a single area, light becomes paramount in guaranteeing balance and uniformity to spaces. The overall vision thus becomes fluid and seamless.

Elica ceiling extractor hoods are designed to integrate seamlessly into the surfaces in which they are inserted. In the sophisticated models on offer, light plays a fundamental role in the overall architectural project. The illuminated panels outline the space, creating not just personalised atmospheres, but imperceptible aerial volumes which can become a signature feature in the room or blend discretely into the ceiling when not in use. Like real windows in the ceiling, Elica hoods provide exceptional extraction performance and the best lighting possible through the use of dimmer lights and the Tune White function which allows the colour of the light to be adjusted based on personal tastes and requirements.

The ceiling range consists of products with a high technological and aesthetic value: Hilight, with its elegant and modern design; Illusion, the paintable solution which gives the illusion of disappearing into the ceiling; Skydome, with its clean, discrete lines featuring signature large illuminated panel and Lullaby, an authentic architectural project featuring material and light which stamp their mark on the kitchen.

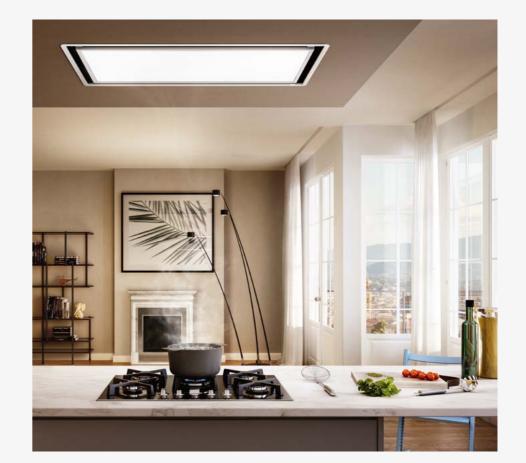




CEILING 160 / elica o ilio

FOCUS ON CEILING

FOCUS ON CEILING

S.E.I. SYSTEM

Thanks to the patented Super Easy Installation system, just a few simple steps are all that it takes to complete the safe installation of the hood without affecting the false ceiling.

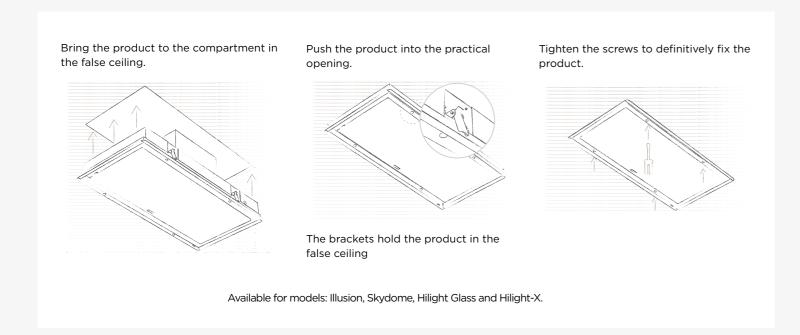

LIGHTING ACCESSORIES

Elica ceiling hoods are fitted with high-intensity LED lights. The luminosity and white tone can be adjusted on all the models depending on the time of day or personal requirements. A colder light is perfect when preparing meals while a warmer light is just what you need to create an intimate atmosphere during dinner.

And if the watchword is customisation, then Elica has come up with a series of light accessories to enhance the products with cables in different materials, from fabric to copper, as well as a variety of additional bulbs.

Just like a real ceiling light, the hood can also be controlled with a wall switch or a remote control which can be attached to the wall with a handy magnet.










LIGHTING KIT JUTE KIT0147

SPACE-SAVING INSTALLATION



The powerful extractor fan is integrated in the false ceiling and ensures an excellent level of fume extraction. Designed to be installed anywhere, Elica ceiling hoods adapt perfectly even to lower ceilings. They are, in fact, available in two heights, 30 cm and 16 cm.

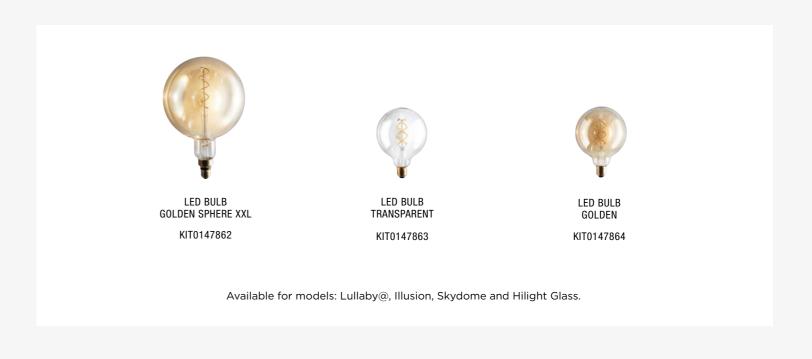

CEILING 162 POICA 163 CEILING










LULLABY@

ELICA CONNECT

120x65 cm Duct-out/Filtering WH WOOD: white lacquered wood + stainless steel WOOD: natural oak + White soft touch effect



be connected.

















DUCT-OUT FILTERING

FALSE CEILING CUT 470X960














	LIGHTING	
Type Led Panel 28W Intensity 1683 LUX Temperature 2700 K - 5000 K		
	PERFORMANCE	
	Duct-out	Filtering
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	770 m³/h	470 m³/h
Noise level min-max	40 - 53 db(A)	44 - 63 db(A)
Total absorption	298 W	568 W
Grease aluminium filter included Ceramic odour filter included (*) Remote control included		

ACCES	SORIES
Ceramic odour filter	KIT0147861A
Filtering kit H30	KIT0148449
High performance filtering kit	KIT0148450A
White remote control	KIT0121468
Black remote control	KIT0121469
White shelf kit	KIT0147859
Kit dimmer	KIT0147878
Oak shelf kit	KIT0147858
MOD	DELS
LULLABY @ WH WOOD/A/120	PRF0167048
LULLABY @ WH WOOD/F/120 (*)	PRF0167049
LULLABY @ WOOD/A/120	PRF0167046
LULLABY @ WOOD/F/120 (*)	PRF0167047

Model not subject to compulsory energy certification. (*)





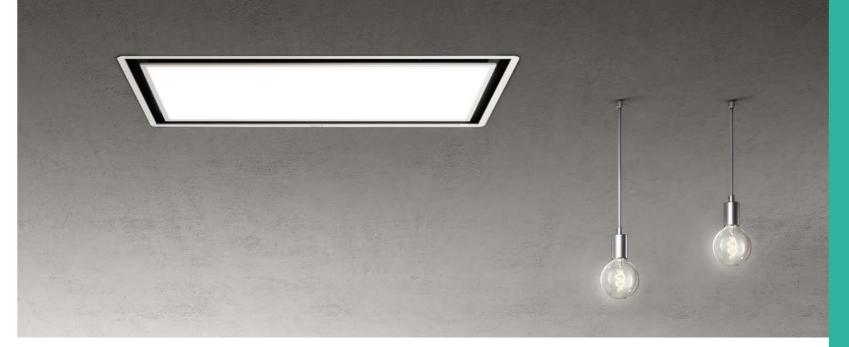

SKYDOME
















100x50 cm Duct-out White frame




The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties

with low noise levels.

The full LED panel can be controlled by a wall-mounted switch or remote control to adjust the intensity and colour of the light. Possibility to connect the product to any commercially available light.







	LIGHTING			
Type Intensity Temperature	Led Panel 28W 1683 LUX 2700 K - 5000 K			
PERFORMANCE				
Controls	3S+2B Remote control			
	H16	H30		
Booster airflow	720 m³/h	770 m³/h		
Noise level min-max	51 - 68 db(A)	40 - 53 db(A)		
Total absorption	303 W	298 W		

Grease aluminium filter included Remote control included

	ACCESSORIES
Filtering kit H30	KIT0148449
High performance filtering kit	KIT0148450A
Regenerable filter kit	KIT0167743
White remote control	KIT0121468
Black remote control	KIT0121469
Remote internal motor	KIT0147879
Remote external motor (wall)	KIT0147880
Remote external motor (roof)	KIT0147881
Remote external motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392
Kit dimmer	KIT0147878
	MODELS
SKYDOME H16 A/100	PRF0147735A
SKYD0ME H30 A/100	PRF0146232A
SKYDOME NO MOTOR A/100	PRF0146230











ILLUSION



H16 - NO MOTOR

















100x50 cm

Duct-out

White + white frame, coverable with drywall (not included) + stainless steel frame, black soft touch effect + black soft touch







FALSE CEILING CUT 480X980

Unique and customisable model ready for cladding with gypsum panels. The gypsum panels are not included in the packaging. The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels. Possibility to connect the product to any commercially available light.

	LIGHTING	
Type Intensity Temperature	Strip Led 2x1 563 LUX 2700 K - 500	
	PERFORMANCE	
Controls	3S+2B Remote contro	ıl
	H16	H30
Booster airflow	720 m³/h	770 m³/h
Noise level min-max	51 - 68 db(A)	40 - 53 db(A)

303 W

298 W

Grease aluminium filter included Remote control included

Total absorption

ACCESSORIES

Filtering kit H30	KIT0148449
High performance filtering kit	KIT0148450A
Regenerable filter kit	KIT0167743
White remote control	KIT0121468
Black remote control	KIT0121469
Remote internal motor	KIT0147879
Remote external motor (wall)	KIT0147880
Remote external motor (roof)	KIT0147881
Remote external motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392
Kit dimmer	KIT0147878
MODELS	
ILLUSION H30 WH/A/100	PRF0146251A
ILLUSION H16 WH/A/100	PRF0147727A
ILLUSION NO MOTOR WH/A/100	PRF0146253
ILLUSION H30 BL MAT/A/100	PRF0172646A
ILLUSION H16 BL MAT/A/100	PRF0172645A
ILLUSION NO MOTOR BL MAT/A/100	PRF0172647
ILLUSION H30 PAINT/A/100	PRF0146250A
ILLUSION H16 PAINT/A/100	PRF0147726A
ILLUSION NO MOTOR PAINT/A/100	PRF0146252









HILIGHT GLASS


















The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels.

The LED strips can be controlled by a wall-mounted switch or remote control to adjust the intensity and colour of the light. Possibility to connect the product to any commercially available light.


Grease aluminium filter included Remote control included


100x57 cm Duct-out

White glass + white frame



H16 - NO MOTOR





FALSE CEILING CUT 550X980

FALSE CEILING CUT 550X980

ACCESSORIES

	LIGHTING	
Type	Strip Led 2x14 W	
Intensity	563 LUX	
Temperature	2700 K - 5000 K	
	PERFORMANCE	
	H16	H30
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	720 m³/h	770 m³/h
Noise level min-max	51 - 68 db(A)	42 - 58 db(A)
Total absorption	303 W	298 W

KIT0148450A KIT0167743 KIT0121468 KIT0121469
KIT0121468
KIT0121460
KI10121409
KIT0147879
KIT0147880
KIT0147881
KIT0147882
KIT0161392
KIT0147878
PRF0146246A
PRF0167044A









HILIGHT-X














100x57 cm
Duct-out
Stainless steel, white, black soft touch effect





The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels.

FALSE CEILING CUT 550X980

FALSE CEILING CUT 550X980

	LIGHTING	
Туре	Strip Led 2x7 W	
Intensity	281 LUX	
Temperature	3500 K	
	PERFORMANCE	
	H16	H30
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	720 m³/h	780 m³/h
Noise level min-max	51 - 68 db(A)	31 - 63 db(A)
Total absorption	189 W	184 W
Grease aluminium filter	included	

ACCESSORIES		
Filtering kit H30	KIT0148449	
High performance filtering kit	KIT0148450A	
Regenerable filter kit	KIT0167743	
White remote control	KIT0121468	
Black remote control	KIT0121469	
Remote internal motor	KIT0147879	
Remote external motor (wall)	KIT0147880	
Remote external motor (roof)	KIT0147881	
Remote external motor (inclined roof)	KIT0147882	
Extension lead for remote motor	KIT0161392	
MODELS		
HILIGHT-X H30 IX/A/100	PRF0163520A	
HILIGHT-X H16 IX/A/100	PRF0167045A	
HILIGHT-X NO MOTOR IX/A/100	PRF0163523	
HILIGHT-X H30 WH/A/100	PRF0173444A	
HILIGHT-X H16 WH/A/100	PRF0173442A	
HILIGHT-X H30 BL MAT/A/100	PRF0173445A	
HILIGHT-X H16 BL MAT/A/100	PRF0173443A	







CLOUD SEVEN









90 cm Duct-out/Filtering Stainless steel + white

Remote control included



Plug&Play model, easy-to-install, no need for building work on gypsum panels or additional pipes (Cloud Seven Filter).





FALSE CEILING CUT 480X880

Туре	Strip Led 2x7 W	
Intensity	393 LUX	
Temperature	3500 K	
	PERFORMANCE	
	DUCT-OUT	FILTERING
Controls	3S + 2B Remote control	3S + B Remote control
Booster airflow	770 m³/h	570 m³/h
Noise level min-max	43 - 60 db(A)	52 - 70 db(A)
Total absorption	284 W	214 W
Grease aluminium filter	included	

Regenerable charcoal filter High performance filtering kit Regenerable filter kit White remote control Black remote control	CFC0140426 KIT0148450A KIT0167743 KIT0121468
Regenerable filter kit White remote control	KIT0167743
White remote control	
	KIT0121468
Black remote control	
	KIT0121469
MODELS	
CLOUD SEVEN IX/F/90 (*)	PRF0141953
CLOUD SEVEN IX/A/90	PRF0142094A

ACCESSORIES

Model not subject to compulsory energy certification. (*)

CEILING PIPE FITTING ACCESSORIES




222x89x1000 mm KIT0120991



222x89x500 mm KIT0173527



Ø146 - 227x94 mm KIT0121007



90° - 227x288x94 mm KIT0121004



90° - 227x94 mm KIT0121005



int 216x82 / est 290x160 mm KIT0121009



227x94x80 mm KIT0121001



Ø153 - 227x94 mm KIT0121008



Ø150x500 mm KIT0120996

Ø150x3000 mm

1052AD



Ø150x1000 mm KIT0121000



Ø158x59 mm KIT0121003



90° - Ø157 KIT0121006







Ø152x1000 mm KIT0161455



227x94x560 mm KIT0126810



Ø147 - 190x190 mm KIT0121010



50 mm x 25 m KIT0161453



Ø150x240 mm KIT0161457

To avoid the formation of condensate and the flowback towards the source of air output, we advise installing this component along the outlet pipe, taking care to position it horizontally to ensure correct operation.

The accessory must be installed on the motor if there is an INLINE remote motor unit.



CARBON FILTERS KIT



Available for

HILIGHT X H16

ILLUSION H30

SKYDOME H16

SKYDOME H30

Available for

HILIGHT GLASS H16 HILIGHT X H30

HILIGHT GLASS H30 ILLUSION H16

CLOUD SEVEN VERS. DUCT-OUT

Regenerable filter kit H16-H30 KIT0167743



Regenerating carbon filter for KIT0167743 KIT0168748





High performance filtering kit LULLABY@ VERS. DUCT-OUT. H16-H30

KIT0148450A



for KIT0148450A



Available for

CLOUD SEVEN VERS.FILTERING

High performance carbon filter LULLABY@ VERS. DUCT-OUT KIT0168749



Ceramic odour filter KIT0147861A

Recycling kit H30

KIT0148449



CFC0140426

Regenerable charcoal filter

Available for HILIGHT X H30 HILIGHT GLASS H30 ILLUSION H30 SKYDOME H30 LULLABY@ VERS. DUCT-OUT





The elegance of the light is combined with powerful extraction units to produce attractive eye-catching hoods. Hoods that become spectacular ceiling lights that not only furnish the kitchen, but guarantee the best air treatment, thanks to the latest generation of filters. The skilful use of materials allows it to fit seamlessly into any environment and yet, make a statement: from the sophisticated and luminous glass, perfect for elegant and refined spaces, to the polished copper or rust finish, ideal for an industrial look. Unexpected points of light, for a wow factor.













INTERSTELLAR

Ø67 cm Recyling

Shiny stainless steel + glass, shiny stainless steel + black glass
















LIGHTING

Led 9 W Type 261 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+B Electronic push button

Booster airflow 384 m³/h 36 - 54 db(A) Noise level min-max Total absorption 134 W

Grease aluminium filter included Regenerable charcoal filter HP included Remote control included

ACCESSORI	E
	C

CFC0140053 Regenerable charcoal filter HP CFC0140090 Regenerable charcoal filter KIT0121468 White remote control KIT0121469 Black remote control KIT0112772 Extension cable kit (5m)

MODELS

INTERSTELLAR IX/F/65 PRF0151808 INTERSTELLAR BL/F/65 PRF0151809















SEASHELL

Ø80 cm Filtering


Pearl, matt white, matt black, shiny stainless steel











Type Intensity	Neon 4x24 W 1386 LUX
Temperature	6500 K
	PERFORMANCE
Controls	3S+B Remote control
Booster airflow	400 m³/h
Noise level min-max	55 - 67 db(A)

350 W

LIGHTING

Grease aluminium filter included Regenerable charcoal filter included Remote control included

Total absorption

ACCESSORIES		
Regenerable charcoal filter	CFC0141725A	
White remote control	KIT0121468	
Black remote control	KIT0121469	
Extension cable kit (2,5m) KIT0067590		
MODELS		
SEASHELL IX/F/80	PRF0098394	
SEASHELL BL/F/80	PRF0098393	
SEASHELL WH/F/80	PRF0024262A	
SEASHELL WH MAT/F/80	PRF0098392	

Model not subject to compulsory energy certification.













SUMMILUX













Ø 50 cm Recyling

Grey + white glass, cast iron effect + white glass






















Possibility for wall mounting by ordering the ancillary installation.

LIGHTING

Led 9 W Type 261 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+B Electronic push button

384 m³/h Booster airflow 36 - 53 db(A) Noise level min-max 124 W Total absorption

Grease aluminium filter included Regenerable charcoal filter HP included Remote control included

ACCESSORIES

CFC0140053 Regenerable charcoal filter HP CFC0140090 Regenerable charcoal filter KIT0121468 White remote control KIT0121469 Black remote control Chrome wall installation kit KIT0146156 Black wall installation kit KIT0146155 Extension cable kit (5m) KIT0112772

MODELS

SUMMILUX LIGHT GREY/F/50 PRF0176166 SUMMILUX CAST IRON/F/50 PRF0176167













SHINING

Ø 50 cm Recyling

Metal: peltrox, rust, cast iron effect
















Possibility for wall mounting by ordering the ancillary installation.

	LIGHTING	
Туре	Led 9 W	
Intensity	541 LUX	
Temperature	3500 K	
	PERFORMANCE	

Controls 3S+B Electronic push button

380 m³/h Booster airflow

Total absorption

36 - 53 db(A) Noise level min-max

Grease aluminium filter included Regenerable charcoal filter HP included Remote control included

	ACCESSORIES	
Regenerable charcoal filter HP	CFC0140053	
Regenerable charcoal filter	CFC0140090	
White remote control	KIT0121468	
Black remote control	KIT0121469	
Chrome wall installation kit	KIT0146156	
Black wall installation kit	KIT0146155	
Extension cable kit (5m)	KIT0112772	

54 W

	MODELS	
SHINING CAST IRON/F/50		PRF0120590A
SHINING PELTROX/F/50		PRF0120497A
SHINING RUST/F/50		PRF0120528A
Offinential Hoof/1/00		1111012002011











ÉDITH

Ø 50 cm Recyling

Black, white, shiny stainless steel
























Possibility for wall mounting by ordering the ancillary installation.

red<mark>dot</mark> design award winner 2015







LIGHTING

Led 9 W Type 469 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+B Electronic push button

380 m³/h Booster airflow 36 - 53 db(A) Noise level min-max 54 W Total absorption

Grease aluminium filter included Regenerable charcoal filter HP included Remote control included

ACCESSORIES

CFC0140053 Regenerable charcoal filter HP CFC0140090 Regenerable charcoal filter KIT0121468 White remote control KIT0121469 Black remote control KIT0146156 Chrome wall installation kit KIT0146155 Black wall installation kit KIT0112772 Extension cable kit (5m)

MODELS

EDITH CLASSIC/F/50 PRF0098360 EDITH HEAVYMETAL/F/50 PRF0098364 EDITH ROCK/F/50 PRF0098361













WAVE UX

Ø50 cm Recyling

Stainless steel, black soft touch effect


















Possibility for wall mounting by ordering the ancillary installation.

LIGHTING		
Туре	Led 3X2,5 W + Led 4X3 W	
Intensity	211 LUX	
Temperature	4000 K	
	PERFORMANCE	
Controls	3S+B Electronic push button	

Booster airflow 610 m³/h 45 - 62 db(A) Noise level min-max Total absorption 219,5 W

Grease aluminium filter included Regenerable charcoal filter included


ACCES	SSORIES	
Regenerable charcoal filter	CFC0140088	
Extension cable kit (2,5m)	KIT01889	
Extension cable kit (5m)	KIT01921	
Stainless steel wall installation kit	KIT0175805	
Black wall installation kit	KIT0175806	
MO	DELS	
WAVE UX BL MAT/F/51	PRF0171193	
WAVE UX IX/F/51	PRF0171194	









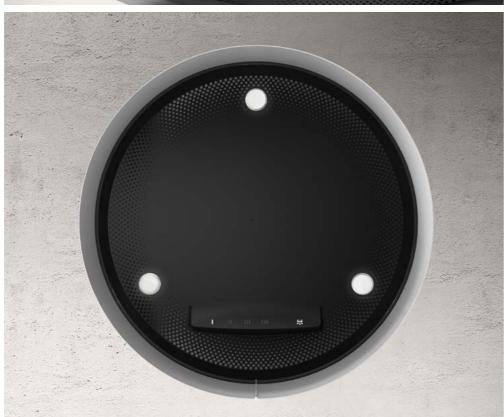



EASY UX

Ø50 cm Recyling

Stainless steel, black soft touch effect, white
















Possibility for wall mounting by ordering the ancillary installation.

LIGHTING Led 3X2,5 W 211 LUX Type Intensity 4000 K Temperature

PERFORMANCE

Controls 3S+B Electronic push button

Booster airflow 610 m³/h 45 - 62 db(A) Noise level min-max Total absorption 207,5 W

Grease aluminium filter included Regenerable charcoal filter included

	ACCESSORIES
egenerable charcoal filter	CFC0140088
xtension cable kit (2,5m)	KIT01889
xtension cable kit (5m)	KIT01921
tainless steel wall installation kit	KIT0175805
lack wall installation kit	KIT0175806

MODELS

EASY UX BL MAT/F/50 EASY UX IX/F/50 EASY UX WH/F/50 PRF0120352A PRF0120354A PRF0119940A

















PIX CONCRETE





Type

Intensity

Controls

Booster airflow

Temperature

PIX

42x42 cm Recyling

White, black, concrete finish, denim finish















44 - 60 db(A) Noise level min-max 207 W Total absorption Grease aluminium filter included Regenerable charcoal filter included

	ACCESSORIES	
Regenerable charcoal filter		KIT0147175
Stainless steel wall installation kit		KIT0146153
Extension cable kit (2,5m)		KIT0147941
Extension cable kit (5m)		KIT0147942
	MODELS	
PIX BL/F/42		PRF0146220

LIGHTING

PERFORMANCE

3S+B Electronic push button

Strip Led 1x7 W

365 LUX

3500 K

610 m³/h

PIX WH/F/42 PIX JEANS/F/42 PRF0145561 PRF0146221 PIX CONCRETE/F/42 PRF0146222



Possibility for wall mounting by ordering the ancillary installation.











IKONA LIGHT


60 cm Filtering Stainless steel, black soft touch effect, white











Possibility for wall mounting by ordering the ancillary installation.

	LIGHTING
Туре	Strip Led 1x7 W
Intensity	365 LUX
Temperature	3500 K
	DEDECOMANICE
	PERFORMANCE

Controls	3S+B Electronic push button
5	240 24

Booster airflow 610 m³/h 47 - 62 db(A) Noise level min-max Total absorption 207 W

Grease aluminium filter included Charcoal filter included

	ACCESSORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
Stainless steel wall installation kit	KIT0175807	
Black wall installation kit	KIT0175808	
Extension cable kit (2,5m)	KIT0147941	
Extension cable kit (5m)	KIT0147942	
	MODELS	
IKONA LIGHT IX/F/60	PRF0165071	
IKONA LIGHT BL MAT/F/60	PRF0165082	
IKONA LIGHT WH/F/60	PRF0165083	









Ø 50 cm Recyling Stainless steel, white, black


















Possibility for wall mounting by ordering the ancillary installation.

LIGHTING

Туре	Led 2x2,5 V
Intensity	381 LUX
Temperature	3500 K

PERFORMANCE

Controls 3S Soft light push button

Max airflow 620 m³/h Noise level min-max 45 - 67 db(A) Total absorption 205 W

Grease aluminium filter included Regenerable charcoal filter included

JUNO IX/F/50

JUNO BL/F/50

JUNO WH/F/50

	ACCESSORIES	
Regenerable charcoal filter	CFC0140088	
Stainless steel wall installation kit	KIT0175805	
Black wall installation kit	KIT0175806	
Extension cable kit (2,5m)	KIT01889	
Extension cable kit (5m)	KIT01921	
	MODELS	

PRF0089651D PRF0071970D

PRF0071972D







JUNO URBAN

Ø 50 cm Recyling

Cast iron effect metal, zinc coating effect metal















PERFORMANCE Controls 3S Soft light push button Max airflow 620 m³/h Noise level min-max 45 - 67 db(A) 205 W

Grease aluminium filter included Regenerable charcoal filter included

Type

Intensity

Temperature

Total absorption

ACC	ESSORIES	
Regenerable charcoal filter	CFC0140088	
Stainless steel wall installation kit	KIT0175805	
Black wall installation kit	KIT0175806	
Extension cable kit (2,5m)	KIT01889	
Extension cable kit (5m)	KIT01921	
M	IODELS	
JUNO URBAN CAST IRON/F/50	PRF0147728B	
JUNO URBAN ZINC/F/50	PRF0147730B	

LIGHTING


Led 2x2,5 W 381 LUX

3500 K



Possibility for wall mounting by ordering the ancillary installation.

SUSPENDED 216 | elica

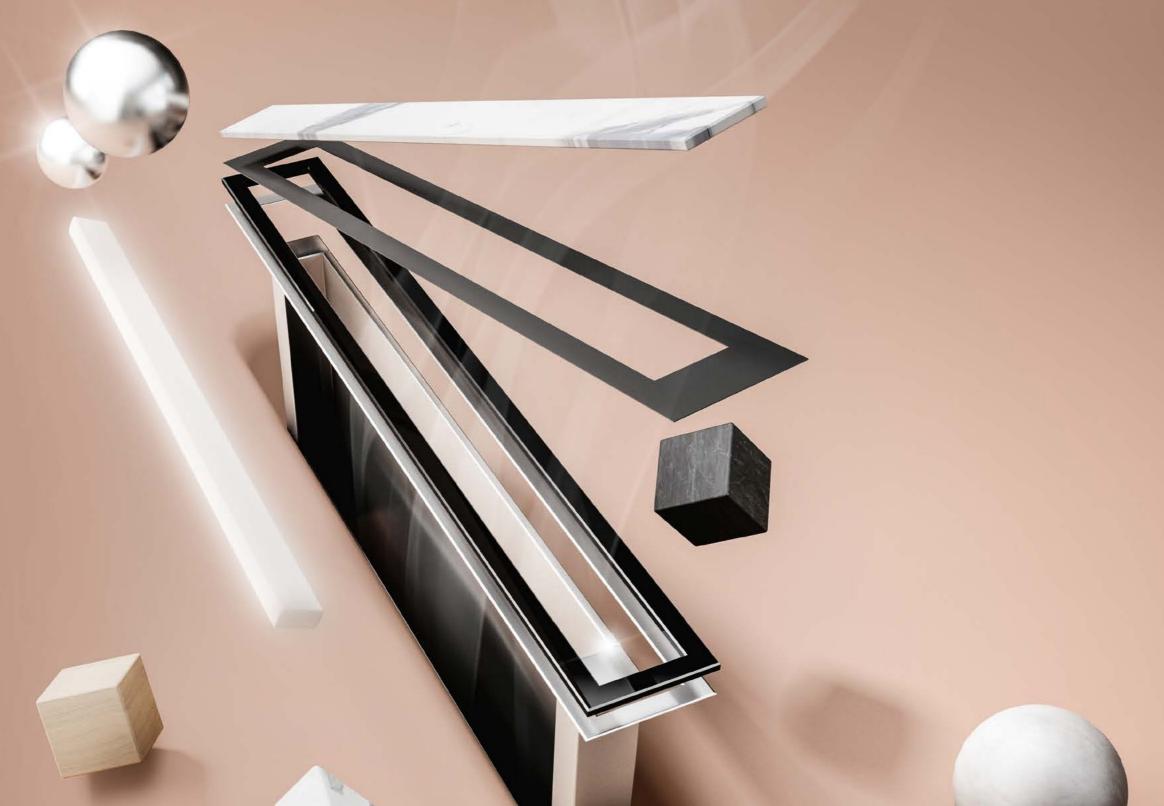















GETUP

90 cm Duct-out

Stainless steel, black soft touch effect + black glass, cast iron effect, cast iron effect + coverable






















CUT FOR INSTALLATION

Total freedom and comfort with Getup, thanks to the user interface displayed on the front and the handy voice assistant or remote control via the app, to manage the air flow, light intensity and product maintenance.

ELICA CONNECT

LIGHTING STRIP LED 1x7W Type 203 LUX Intensity 3500 K Temperature

PERFORMANCE

Controls 3S+2B Infrared touch control

Booster airflow 750 m³/h 43 - 62 db(A) Noise level min-max 317 W Total absorption

Grease aluminium filter included

ACCESSORIES

Regenerable charcoal filter HP kit KIT0166432 Regenerable carbon filter kit KIT0166444 KIT0166435 Remote motor transformation kit

MODELS

GETUP IX/A/90 PRF0161680 GETUP BL MAT/A/90 PRF0162784 GETUP CAST IRON/A/90 PRF0162866 PRF0162869 GETUP NAKED/A/90





FOCUS ON GETUP FOCUS ON GETUP

Understated, minimal style

The new Getup model enhances the classic downdraft style and cutting-edge technological solutions which ensure the utmost comfort in the kitchen.

It stems from the demand of those aiming for a minimal setting, but one that is also focused on efficiently removing vapours and odours in the home.



Original solutions

Materials have always been one of the fundamental elements for Elica in the innovation process, resulting in statement solutions, in line with trends in the furnishing sector. In Getup, the black finish is interpreted with a combination of black glass and details in soft touch paint while the classic solution in steel showcases its timeless elegance.

The cast-iron effect is a brand-new addition: highlighted by a titanium trim, the subtly bright finish blends in perfectly with new kitchen styles and the aesthetic elements of the gas hobs. The "naked" model allows you to cover the upper panel with any texture, even the same one as the worktop, making Getup a oneof-a-kind, customisable product.










Total installation freedom

Getup blends discretely into any type of kitchen, leaving total freedom for installation and taking up a minimum amount of space inside the unit, thanks to its size and the position of the extraction unit which allows for deeper drawers.

The motor, included in the box, can be assembled on-board or on both sides of the product, with the option of turning the outlet in four directions to meet any installation requirement. The same extraction unit can also be installed remotely (up to 3 metres), freeing up space inside the unit whilst maintaining

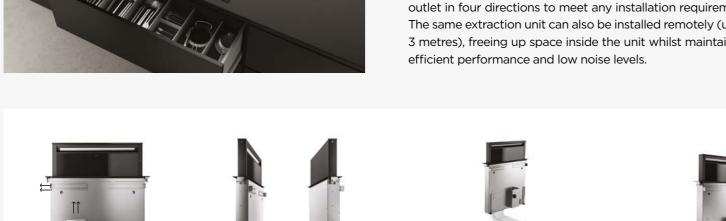

Smart interaction and Wi-fi connection

ELICA CONNECT

Interacting with Getup is surprisingly natural. The innovative user interface is always on view and all the functions can be selected with a touch on the side part of the product, so you don't have to reach over pans or the hot stove, ensuring complete safety.

Getup comes with Wi-fi: extraction and lights can be controlled via the dedicated App and widely-used smart speakers. Using the Elica Connection App, it is possible to receive useful feedback on filter maintenance and the best ways to use the hood.





DOWNDRAFT 224 2 elica







PANDORA


Filtering (internal motor)
Duct-out (external motor) Stainless steel + black glass, black + black glass









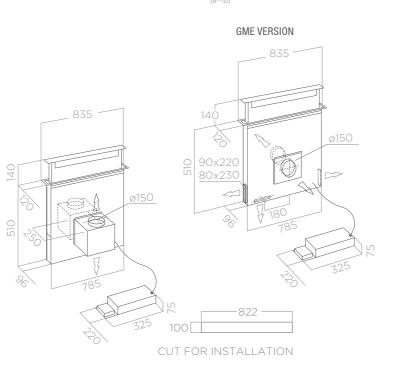

PERFORMANCE

Controls 3S+B Electronic push button

669 m³/h Booster airflow

Noise level min-max 45 - 59 db(A)

275 W Total absorption

Grease aluminium filter included Charcoal filter included (*)

ACCESSORIES

CFC0142324 PRF0006212A PRF0046491A Charcoal filter Remote external motor (GME22) Remote external motor (GME88)

MODELS

PANDORA IX/F/90 (*)
PANDORA GME IX/A/90 (**) PRF0120980 PRF0120982 PANDORA BL/F/90 (*) PRF0120979 PANDORA GME BL/A/90 (**) PRF0120981

(*) On-board motor supplied (**) Remote motor not supplied FOCUS ON GETUP FOCUS ON GETUP

ACCESSORY PIPE FITTINGS FOR DUCT-OUT VERSION

222x89x1000 mm KIT0120991



222x89x500 mm KIT0173527



Ø150x500 mm KIT0120996



Ø150x1000mm KIT0121000



227x94x80mm KIT0121001



15° 227×138×94 KIT0121002



Ø158X59mm KIT0121003



90° 227x288x94mm KIT0121004



90° 227x94mm KIT0121005



90° - Ø157 KIT0121006



227x94 - Ø146mm KIT0121007



227x94 - Ø153mm KIT0121008




int 216x82 / est 290x160 mm KIT0121009



190x190 - Ø147mm KIT0121010



227x94x560 mm KIT0126810



50 mm x 25 m KIT0161453

ACCESSORY PIPE FITTINGS FOR DUCT-OUT VERSION



218x55x500 mm KIT0121012



218x55x1000 mm KIT0121013




218x55X70 mm KIT0121015



90° 218x55 mm KIT0121016




218x55X590 mm KIT0121017



50 mm x 25 m KIT0161453

DOWNDRAFT 228 | elica 229 DOWNDRAFT

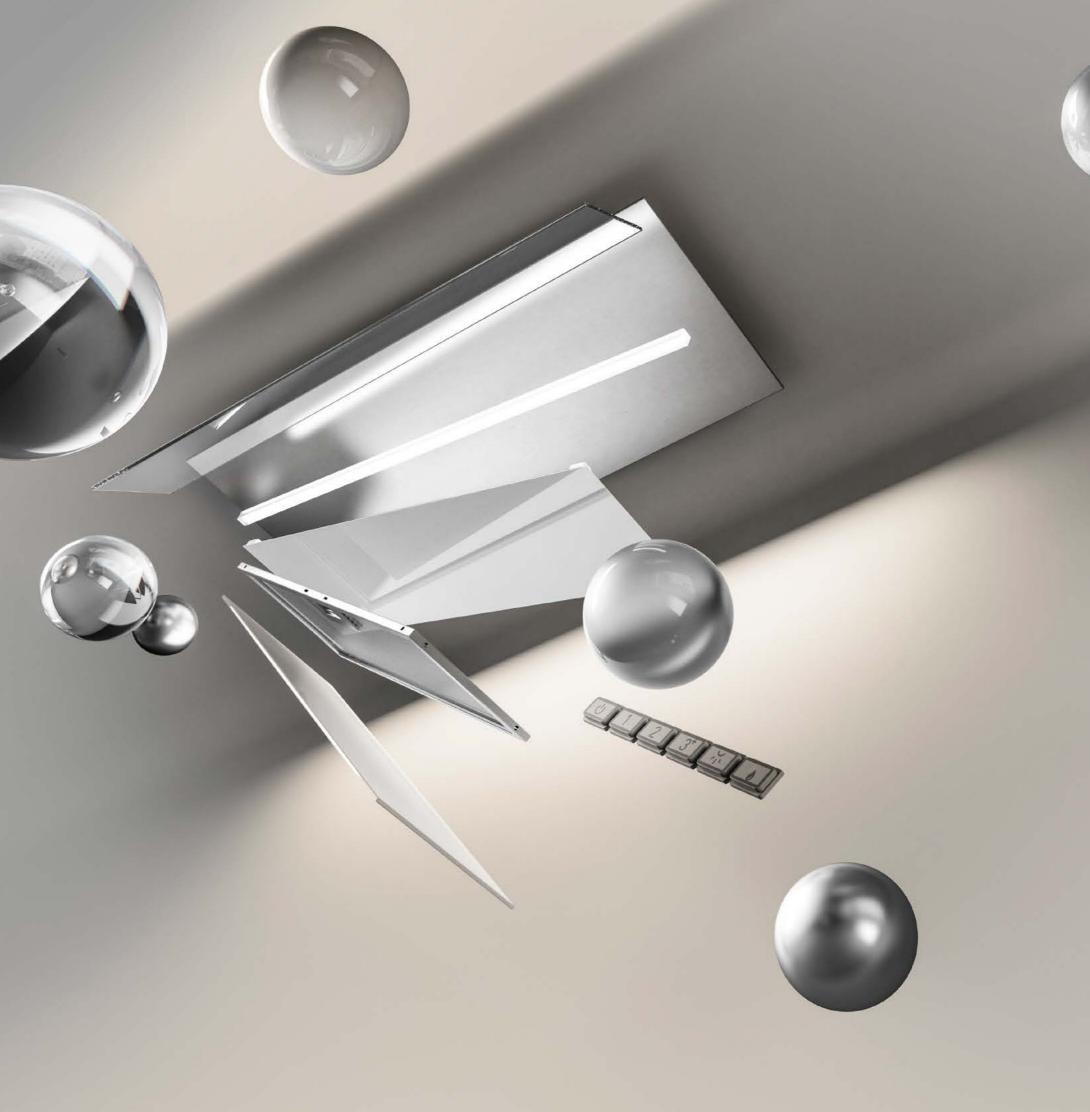

BUILT IN

The traditional concealed installation allows you to create a uniform and seamless environment, with no interruptions. For anyone looking for maximum alignment and total linearity, built-in hoods are the solution to stamping your own style on the kitchen. The perfect fit between the wall units allows for continuity, concealing the technology behind the extraction unit inside the hood. The innovative no-drip, anti-condensate system ensures the best protection for the wall units, capturing the drops of rising steam before they are dispersed in the air. Discrete and sophisticated allies.











HIDDEN 2.0 @

DESIGNI EARRIZIO CRISÀ

60 - 90 cm Duct-out Stainless steel




















Hidden 2.0 @ heightens the user's sense of freedom, offering more time to concentrate on cooking thanks to the smart wireless system. The hood can be used either through the app or with voice commands, giving and receiving information.

ELICA CONNECT

 LIGHTING

 Type
 STRIP LED 1x7W

 Intensity
 309 LUX

 Temperature
 2700 - 6500 K

PERFORMANCE

Controls 3S+B Electronic push button

Booster airflow $690 \text{ m}^3\text{/h}$ Noise level min-max 51 - 67 db(A)Total absorption 277 W

Grease aluminium filter included

HIDDEN 2.0 @ IX/A/90

ACCESSORIES		
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
Air diffuser grid kit 150mm	KIT0162617	
Telescopic chimney kit h18,5+h18,5	KIT0141458	
10M	DELS	
HIDDEN 2.0 @ IX/A/60	PRF0164340	

PRF0164356



FOCUS ON HIDDEN 2.0 @

Even built-in hoods connected to the Web, starting now


ELICA CONNECT

Hidden 2.0 @ is Elica's first built-in hood with Wi-Fi connection, a model distinguished by its extremely clean design, allowing its smooth and complete integration into your kitchen design.


Through this product, Elica continues its journey through the IoT world, making life in the kitchen even simpler: Hidden 2.0 @ allows greater freedom of movement and more time to concentrate on your cooking.

The hood can be managed through the Elica Connect app, using which it's possible to adjust the intensity and warmth of the light, whether cooler and more elegant or softer and more inviting, thus perfectly creating your desired atmosphere.

The dedicated and extremely user-friendly app updates the user with helpful information regarding the status of the product or any necessary servicing, such as filter maintenance or replacement. Moreover, Hidden 2.0 @ can be connected with the most popular smart speakers for access to voice control.

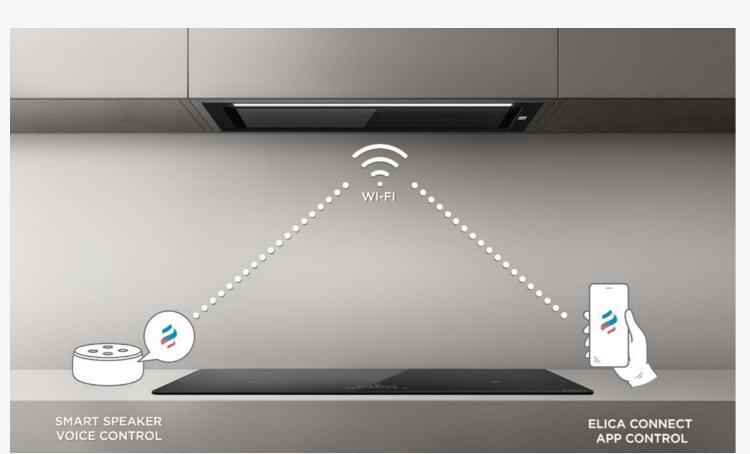

Huge performance in a spacesaving solution

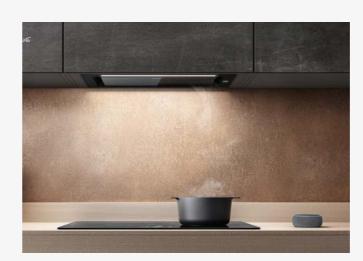

Hidden 2.0 @ is designed to guarantee best performance in the smallest possible space. Its reduced overall size in fact allows use of the cabinet space regardless, useful in storing jars or recipe books.

The hood becomes an integral part of the space and guarantees best performance also thanks to a perimeter extraction system, which perfectly captures the fumes.



A LED strip illuminates the hob with diffused and even lighting, and allows adjustment of the light intensity and colour, from cool white to a warmer shade, ensuring the perfect atmosphere and best visual comfort at all times.



Linearity in the kitchen

Hidden 2.0 @ is designed to disappear into the cabinet. The central panel in either glass or steel hides the functional elements of the product while maintaining a clean look and perfectly blending in with the cabinet. The result is a totally linear kitchen effect without any discontinuity, perfect for lovers of an understated and essential style.

BUILT-IN 236 POICA 237 BUILT-IN







HIDDEN 2.0

60 - 90 cm Duct-out Stainless steel

















A
ENERGY CLASS (A+++/D)

Strip Led 1x7 W
365 LUX
3500 K
PERFORMANCE
3S+B Electronic push button

LIGHTING

Booster airflow 700 m³/h

51 - 67 db(A) Noise level min-max 277 W Total absorption

279
60
193:50
514.714 260
282

Grease aluminium filter included		
ACCES	SSORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
Air diffuser grid kit 150mm	KIT0162617	
Telescopic chimney kit h18,5+h18,5	KIT0141458	
MO	DELS	
HIDDEN 2.0 IX/A/60	PRF0092333A	
HIDDEN 2.0 IX/A/90	PRF0095073A	







LANE

60 - 80 cm Duct-out Stainless steel, black soft touch effect


















Lane is the invisible hood that blends perfectly into the kitchen's linearity. It features a modern design, high performance and offers excellent value for money. Moreover, it comes with a patented fastening system made up of 2 side clips, allowing the hood to be secured to the cabinet with only 2 screws from below, in less than one minute.

	LIGHTING
Туре	STRIP LED 1x7W
Intensity	365 LUX
Temperature	3500 K
	PERFORMANCE
Controls 3S+B Electronic push button	
Booster airflow	650 m³/h
Noise level min-max	49 - 65 db(A)

257 W

Grease aluminium filter included

Total absorption

	ACCESSORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
Air diffuser grid kit 150mm	KIT0162617	
Remote external motor (GME11)	PRF0006209A	
Remote external motor (GME HE)	PRF0158084	
	MODELS	
LANE IX/A/52	PRF0157333	
LANE IX/A/72	PRF0157377	
LANE BL MAT/A/52	PRF0165830	
LANE BL MAT/A/72	PRF0165834	
LANE GME IX 52 (*)	PRF0171141	
LANE GME IX 72 (*)	PRF0171142	

(*) Remote motor not supplied

⊘elica 239 BUILT-IN BUILT-IN 238 **2 elica**







BOXIN NO DRIP

60 - 90 - 120 cm Duct-out Stainless steel




















Type Intensity	LED 2x2,5W 381 LUX
Temperature	3500 K
Temperature	3300 K
	PERFORMANCE
Controls	3S+B Electronic push button
Booster airflow	600 m³/h
Noise level min-max	30 - 60 db(A)
Total absorption	300 W

LIGHTING

Grease aluminium filter included

ACCESSO	RIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
Air diffuser grid kit 150mm	KIT0162617	
Chimney kit H12 IX	KIT0091876	
Telescopic chimney kit h18,5+h18,5 IX	KIT0141458	
MODEL	S	
BOXIN NO DRIP IX/A/60	PRF0157712	
BOXIN NO DRIP IX/A/90	PRF0156613	
BOXIN NO DRIP IX/A/120	PRF0157280	





Elica's first built-in hood that solves the problem of condensate with mechanical and electrical systems able to guarantee an all-round solution. The system has been designed to prevent dripping on the hob, as well as protect wall units from steam.

FOCUS ON BOXIN NO DRIP



Excess condensation and steam will no longer be a problem

When using an induction hob, the formation of condensation is common. Drops often fall back down on the hob or into pots and can ruin the cupboards.

The ample profile in stainless steel protects the door of the cupboard. The innovative resistance element in the hood's body heats the profile and lamp support to 42°C, reducing the temperature difference between the steam and the metal surface. Thanks to the grids the condensation water is easily collected in a specific tray located on the bottom. To empty it, you only have to press a simple button.

The controls are ergonomically positioned on the front of the profile, making them easily accessible and ensuring maximum comfort.





Functions and details in steel with a professional look

The ergonomic and functional design of the profile, combined with patented grids, allows you to achieve exceptional results in terms of fumes collection, for clean and healthy air.

With Boxin No Drip, ergonomic design and functions are in perfect balance. The carefully studied profile measures 14 cm and has a 45° opening radius, representing the perfect angle and distance for channelling the fumes through the grease filter, improving its performance and speed of extraction. Thanks to the special patented grids, the few drops of condensation generated get trapped between the slats of the grids and then conveyed to the water collection tray located at the bottom.







Easy to clean

The condensate collection tray should be emptied and cleaned at least once a week or more frequently, depending on the use of the hood. Place a container under the hole in the crossbar, press the tab down, and proceed with the flushing. Condensation residues may remain inside the tray. To eliminate them, you can easily remove the back crossbar, without the use of tools, so that you can wash it completely.

BUILT-IN 242 POICA 243 BUILT-IN









ELICA DESIGNI CENTER

60 - 90 - 120 cm Duct-out Stainless steel, black soft touch effect




















	LIGHTING		
Type Intensity	Led 2x2,5 W 381 LUX		
Temperature	3500 K		
	PERFORMAN	CE	
Controls	3S Mechanical rotal	tive	
	STD	LUX	
Max airflow	370 m³/h	620 m³/h	
Noise level min-max	48 - 67 db(A)	50 - 70 db(A)	
Total absorption	95 W	255 W	
Grease aluminium filte	r included		
	ACCESSORIE	ES .	
Charcoal filter (*)		CFC0140343	
Regenerable charcoal fill	ter (*)	CFC0162221	
Charcoal filter		CFC0141497	
Air diffuser grid kit 150m	ım	KIT0162617	
Chimney kit H12		KIT0091876	
Chimney kit H18,5+18,5		KIT0141458	
	MODELS		
BOXIN IX/A/60		PRF0097835B	
BOXIN IX/A/90		PRF0097839B	
BOXIN IX/A/120		PRF0097842B	
BOXIN LX/IX/A/60 (*)		PRF0114760A	
BOXIN LX/IX/A/90 (*)		PRF0114761A	
BOXIN LX/IX/A/120 (*)	(*)	PRF0114762A	
BOXIN LX/BL MAT/A/60 BOXIN LX/BL MAT/A/90	. ,	PRF0172166 PRF0172167	
BOXIN LX/BL MAT/A/90	()	PRF0172167 PRF0172168	
DOMIN EN/DE MINI/A/ 120	, ()	11110172100	



ELIBLOC HT


ELICA DESIGN CENTER

60 - 80 cm Duct-out Silver









	LIGHTING	
Туре	Led 2x5 W	
Intensity	761 LUX	
Temperature	3000 K	
	PERFORMANCE	
	НТ	
Controls	4S Mechanical slider	
Max airflow	647 m³/h	
Noise level min-max	49 - 71 db(A)	
Total absorption	210 W	

Grease aluminium filter included

	ACCESSORIES	
Charcoal filter	CFC0140122	
Air diffuser grid kit 150mm	KIT0162617	
	MODELS	
ELIBLOC HT GR A/60	1768336A	
ELIBLOC HT GR/A/80	17614580A	

BUILT-IN 244 | elica 245 BUILT-IN



ERA C

ELICA DESIGNI CENITER

60 - 80 cm Duct-out Stainless steel














	LIGHTING	
Туре	Led 2x3 W	
Intensity	73 LUX	
Temperature	2700 K	
	PERFORMANCE	
Controls	3S Mechanical push button	
Max airflow	368 m³/h	
Noise level min-max	62 - 67 db(A)	
Total absorption	146 W	
Grease aluminium filter	ncluded	

	ACCESSORIES	
	AUULUUUTIILU	
Characal filter	0000141071	
Charcoal filter	CFC0141571	
	MODELS	
	MODELS	
FRA C IX/A/52		
ERA C IX/A/52	PRF0142723	
ERA C IX/A/52 ERA C IX/A/72		
	PRF0142723	



ERA


ELICA DESIGN CENTER

60 - 80 cm Duct-out Silver









	LIGHTING
Туре	Led 2x3 W
Intensity	78 LUX
Temperature	2700 K
	PERFORMANCE
Controls	3S Mechanical slider
Max airflow	224 m³/h
Noise level min-max	45 - 54 db(A)
Total absorption	81 W

Grease aluminium filter include	Grease	aluminium	filter	included
---------------------------------	--------	-----------	--------	----------

	ACCESSORIES	
Charcoal filter	CFC0141571	
	MODELS	
ERA GR/A/52	PRF0142633	
ERA GR/A/72	PRF0142701	

BUILT-IN 246 **# Elica** 247 BUILT-IN



LEVER

60 - 90 - 120 cm Duct-out Stainless steel + glass


















A very simple and essential design characterizes this appliance, which is completely hidden in the cabinet . It is equipped with a frontal visor that protects the door during cooking , conveying vapours through the extraction area.

	LIGHTING
Туре	LED 2x2,5W
Intensity	145 LUX
Temperature	3500 K
	PERFORMANCE
Controls	3S Mechanical push button

Max airflow 603 m³/h $46 - 67 \, db(A)$ Noise level min-max Total absorption 255 W

Grease aluminium filter included

ACCESS	SORIES	
Charcoal filter	CFC0140343	
Regenerable charcoal filter	CFC0162221	
Air diffuser grid kit 150mm	KIT0162617	
Chimney kit H12 IX	KIT0091876	
Telescopic chimney kit h18,5+h18,5 IX	KIT0141458	
MOD	ELS	
LEVER IX/A/56	PRF0160153	
LEVER IX/A/86	PRF0160152	
LEVER IX/A/116	PRF0163362	



CIAK


60 - 90 cm Duct-out Silver











	LICUTING
	LIGHTING
Туре	Led 2x2,5 W
Intensity	141 LUX
Temperature	3500 K
	PERFORMANCE
Controls	3S Mechanical slider
Max airflow	255 m³/h
Noise level min-max	48 - 66 db(A)
Total absorption	120 W

ded
ACCESSORIES
CFC0141563
MODELS
PRF0121068B
PRF0121107B

BUILT-IN 248 | elica **⊘elica** 249 BUILT-IN





ELITE 26


60 - 90 cm Duct-out Stainless steel











Intensity	49 LUX		
Temperature	3500 K		
P	ERFORMANCE PERFORMANCE		
Controls	3S+B Electronic push button		
Booster airflow	581 m³/h		
Noise level min-max	44 - 61 db(A)		
Total absorption	180 W		
Grease aluminium filter incl	uded		
	AKCESORIA ACCESSORIES		
Charcoal filter	CFC0140343		
Regenerable charcoal filter	CFC0162221		
	MODELE MODELS		

PRF0038809B PRF0038812B

ELITE26 IX/A/60 ELITE26 IX/A/90

LIGHTING ECLAIRAGE

LED 2 x 2,5 W








ELITE 14

60 - 90 cm Duct-out Silver + stainless steel









Туре	Led 2x3 W		
Intensity	73 LUX		
Temperature	2700 K		
	PERFORMANCE		
Controls	3S Mechanical push button		
Max airflow	304 m³/h		
Noise level min-max	46 - 62 db(A)		
Total absorption	121 W		

LIGHTING

Grease aluminium filter included

	ACCESSORIES	
Charcoal filter	narcoal filter CFC0141571	
	MODELS	
ELITE 14 LUX GRIX/A/60	PRF0037989B	
ELITE 14 LUX GRIX/A/90	PRF0037992B	

≥ elica 251 BUILT-IN BUILT-IN 250 **? elica**



INTEGRATA

ELICA DESIGNI CENTER


60 cm Duct-out Silver











	LIGHTING	
Туре	LED 1 x 3 W	
Intensity	48 LUX	
Temperature	2700 K	
	PERFORMANCE	
Controls	3S Slider	
Max airflow	290 m³/h	
Noise level min-max	52 - 67 db(A)	
Total absorption	118 W	

Grease aluminium filter included

	ACCESSORIES	
Charcoal filter	CFC0140124	
	MODELS	
INTEGRATA 120GR	5414601D	



VERVE


ELICA DESIGN CENTER

60 cm Duct-out White, black, Silver









	LIGHTING
Гуре	Led 1x3 W
ntensity	60 LUX
Temperature	2700 K
	PERFORMANCE
Controls	3S Mechanical push button
Max airflow	205 m³/h
Noise level min-max	52 - 68 db(A)
Total absorption	53 W

Grease aluminium filter included

	ACCESSORIES	
Charcoal filter	CFC0141715	
	MODELS	
CONV 1 60 SIIX	64415359D	
CON 1 60 BL	64415360D	
CONV 1 60 WH	64415361D	

BUILT-IN 252 | elica 253 BUILT-IN





GOOD TO KNOW

For those of you, who like to keep up with the latest trends and are not just looking for an attractive finish, but also want detailed information about functionality, we have created a section in which you can source all the details on accessories, useful information, advice on how to choose your hood, warranties and energy labels.

REMOTE CONTROLS

ODOUR FILTERS

The Elica radio control, designed by Fabrizio Crisà, is super thin, resistant and practical, thanks to the magnets that allow it to be placed on metal object. It comes in glass and aluminum, in black or white

White KIT0121469 KIT0121468 Black

ALLOWS YOU TO TURN ON THE AMBIENT LIGHT. HOLD DOWN FOR A LONGER TIME TO ADJUST THE BRIGHTNESS OF THE LIGHT. RECHARGEABLE BATTERY WITH MICRO USB PLUG. (CORD INCLUDED).

THE + KEY INCREASES THE ASPIRATION POWER, WHILE THE - KEY DECREASES IT. BY HOLDING DOWN THE LATTER, THE HOOD SWITCHES OFF REGARDLESS OF ITS CURRENT SPEED.

THE **LIGHT** ABOVE THE **HOB** IS SWITCHED ON BY LIGHTLY PRESSING THE KEY. BY HOLDING IT DOWN FOR A LONGER PERIOD, YOU CAN ACTIVATE THE ADVANCED FEATURES, ACCORDING TO YOUR MODEL: THE DIM-LIGHT (THAT ADJUSTES BRIGHTNESS) OR THE TUNE-WHITE (THAT ALLOWS FOR THE VARIATION OF THE LED LIGHT TEMPERATURE).

Charcoal filter



The traditional odour filter, made up of a mix of activated carbons, looses its efficiency through use and has an average life of 3-6 months.

Regenerable charcoal filter

Good to Know




The Regenerable Charcoal Filter has the same characteristics of the HP Regenerable charcoal filter, but with a filtering efficiency that ranges from 40-60 %.

HP Regenerable charcoal filter



Odour filter with very high efficiency level >82%. Capable of regenerating itself and of lasting up to a maximum of 3 years in comparison to standard filters. To maintain such characteristics, the filter must be washed every 2 or 3 months with hot water and mild soap, or in the dishwasher at 65°C. and can be dried in the the oven for 10 minutes at 100°.

Ceramic odour filter

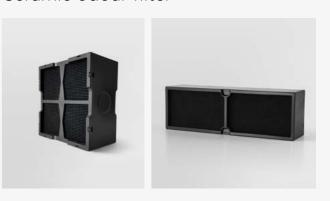

The ceramic filter is a modular charcoal filter that can be thermally regenerated in the oven every 2/3 months at 200° for 45 minutes, up to max 5 years. It allows for very high odour absorption efficiency and very high mechanical strength.

GOOD TO KNOW 256 **elica**

GOOD TO KNOW GOOD TO KNOW

ODOUR FILTERS

	FILTER CODE	FILTER TYPE	
ADÉLE	CFC0141529A	Charcoal	
AUELE	CFC0141725A	Regenerable charcoal	
,	CFC0141529A	Charcoal	
ADÉLE ISLAND	CFC0141725A	Regenerable charcoal	
ADI OMB	CFC0140343	Charcoal	
APLOMB	CFC0162221	Regenerable charcoal	
DI OOM	CFC0140343	Charcoal	
BLOOM	CFC0162221	Regenerable charcoal	
DI COM C	CFC0140343	Charcoal	
BLOOM-S	CFC0162221	Regenerable charcoal	
BOXIN	CFC0141497	Charcoal	
BOXIN LX	CFC0140343	Charcoal	
ROXIN TX	CFC0162221	Regenerable charcoal	
DOVIN NO DDID	CFC0140343	Charcoal	
BOXIN NO DRIP	CFC0162221	Regenerable charcoal	
CIAK LUX	CFC0141563	Charcoal	
OLDONO	CFC0141529A	Charcoal	
CIRCUS	CFC0141725A	Regenerable charcoal	
EASY UX	CFC0140088	Regenerable charcoal	
- FDITU	CFC0140053	Regenerable charcoal HP	
EDITH	CFC0140090	Regenerable charcoal	
ELIBLOC HT	CFC0140122	Charcoal	
ELITE 14	CFC0141571	Charcoal	
ELITE 26	CFC0140343	Charcoal	
ERA	CFC0141571	Charcoal	
ERA C	CFC0141571	Charcoal	
FLAT CLASS	CFC0141529A	Charcoal	
FLAT GLASS	CFC0141725A	Regenerable charcoal	
CALAVY	CFC0141529A	Charcoal	
GALAXY	CFC0141725A	Regenerable charcoal	

	FILTER CODE	FILTER TYPE
GALAXY ISLAND	CFC0141529A	Charcoal
	CFC0141725A	Regenerable charcoal
GETUP	KIT0166432	Regenerable charcoal HP
	KIT0166444	Regenerable charcoal
	CFC0141529A	Charcoal
IAIKU	CFC0141725A	Regenerable charcoal
	CFC0141529A	Charcoal
IAIKU ISLAND	CFC0141725A	Regenerable charcoal
	CFC0140343	Charcoal
IIDDEN 2.0	CFC0162221	Regenerable charcoal
	CFC0140343	Charcoal
IIDDEN 2.0 @	CFC0162221	Regenerable charcoal
	CFC0140343	Charcoal
KONA	CFC0162221	Regenerable charcoal
	CFC0140343	Charcoal
KONA LIGHT	CFC0162221	Regenerable charcoal
ONA MAXXI PURE	CFC0162221	Regenerable charcoal
ITEGRATA	CFC0140124	Charcoal
	CFC0140053	Regenerable charcoal HP
NTERSTELLAR	CFC0140090	Regenerable charcoal
0.17	CFC0141529A	Charcoal
OY	CFC0141725A	Regenerable charcoal
OV ICLAND	CFC0141529A	Charcoal
OY ISLAND	CFC0141725A	Regenerable charcoal
UNO	CFC0140088	Regenerable charcoal
UNO URBAN	CFC0140088	Regenerable charcoal
ANE	CFC0140343	Charcoal
ANE	CFC0162221	Regenerable charcoal
EVED	CFC0140343	Charcoal
LEVER	CFC0162221	Regenerable charcoal

ODOUR FILTERS

	FILTER CODE	FILTER TYPE	
MAJESTIC NO DRIP	CFC0140343	Charcoal	
INIMATESTIC NO DRIP	CFC0162221	Regenerable charcoal	
MISSY	CFC0141497	Charcoal	
OPEN SUITE	KIT0166765	Regenerable charcoal	
OPEN SUITE SUPERIOR	KIT0166765	Regenerable charcoal	
OM AID	CFC0140343	Charcoal	
OM AIR	CFC0162221	Regenerable charcoal	
PANDORA	CFC0142324	Charcoal	
PIX	KIT0147175	Regenerable charcoal	
PLAT	CFC0140423	Regenerable charcoal	
DEEL	CFC0141529A	Charcoal	
REEF	CFC0141725A	Regenerable charcoal	
DEEL IO. AND	CFC0141529A	Charcoal	
REEF ISLAND	CFC0141725A	Regenerable charcoal	
RULES	CFC0166361	C0166361 Regenerable charcoal	
SEASHELL	CFC0141725A	Regenerable charcoal	
OUEEN O	CFC0140343	Charcoal	
SHEEN-S	CFC0162221	Regenerable charcoal	
OLUMBIA	CFC0140053	Regenerable charcoal HP	
SHINING	CFC0140090	Regenerable charcoal	
CUIDE	CFC0140343	Charcoal	
SHIRE	CFC0162221	Regenerable charcoal	
SHY-S	CFC0140343	Charcoal	
CDOT NO	CFC0141529A	Charcoal	
SPOT NG	CFC0141725A	Regenerable charcoal	
CDOT HODAN	CFC0141529A	Charcoal	
SPOT URBAN	CFC0141725A	Regenerable charcoal	
CTDIDE	CFC0140343	Charcoal	
STRIPE	CFC0162221	Regenerable charcoal	

	FILTER CODE	FILTER TYPE
DUBARAH LIV	CFC0140053	Regenerable charcoal HP
SUMMILUX	CFC0140090	Regenerable charcoal
SUPER PLAT	CFC0140423	Regenerable charcoal
WEET	CFC0140426	Regenerable charcoal
	CFC0140343	Charcoal Filtre à charbon
TAMAYA 2.0 S	CFC0162221	Regenerable charcoal Filtre longue durée
	CFC0141529A	Charcoal
TRIBE	CFC0141725A	Regenerable charcoal
	CFC0141529A	Charcoal
TRIBE ISLAND	CFC0141725A	Regenerable charcoal
	CFC0140343	Charcoal
VERTIGO	CFC0162221	Regenerable charcoal
/ERVE	CFC0141715	Charcoal
VAVE UX	CFC0140088	Regenerable charcoal

Good to Know

	FILTER CODE	FILTER TYPE	
NIKOLATESLA FIT	KIT0167755	Ceramic odour filter	
NIKOLATESLA FLAME	KIT0120952A	Ceramic odour filter	
NIKOLATESLA LIBRA	KIT0120952A	Ceramic odour filter	
NIKOLATESLA ONE	KIT0120952A	Ceramic odour filter	
NIKOLATESLA PRIME	KIT0120952A	Ceramic odour filter	
NIKOLATESLA SWITCH	KIT0120952A	Ceramic odour filter	

^{*} see the dedicated section for the ceiling model carbon filter kits

GOOD TO KNOW 258 #elica

REMOTE MOTORS

Aluminium Grease Filter KIT0010805



Available for ADÈLE / ADÈLE ISLAND / BLOOM / BLOOM-S / JOY / MAJESTIC NO DRIP /

MISSY / STRIPE

Layered aluminum grease filter (GFA). This filter is the most common on the market, also because, thanks to its size it can be easily washed by hand, or in the dishwasher.

Buffle Professional Filter KIT0010804



Available for ADÈLE / ADÈLE ISLAND / BLOOM / BLOOM-S / JOY / MAJESTIC NO DRIP / MISSY / STRIPE

All steel grease filter that gives the product a typical industrial hood look. Thanks to the labyrinth of steel layers, this filter has a high grease capturing capacity.

Professional Stainless Steel Grease Filters KIT0010806



Available for ADÈLE / ADÈLE ISLAND / BLOOM / BLOOM-S / JOY / MAJESTIC NO DRIP / MISSY / STRIPE

Grease filter with the first layer in steel and a microperforated back metal sheet, easily washable and with high grease capturing capacity.

GME22 MOTOR PRF0006212A

Airflow Absorption Tot. Duct size

1420 m³/h 200 W 150 mm

Available for PANDORA

PRF0046491A 1495 m³/h 250 W (50Hz)

Absorption Tot. 390 W (60Hz) Duct size 150 mm

GME88 MOTOR

Airflow

Available for


PANDORA


GME11 MOTOR PRF0006209A Airflow

1140 m³/h Absorption Tot. 275 W 150 mm Duct size


Available for LANE

Good to Know









GME EXTERNAL WALL KIT0147880

Airflow Absorption Tot. Duct size

1100 m³/h 150 W 150 mm

Available for HILIGHT GLASS / HILIGHT-X / ILLUSION / SKYDOME

KIT0147881 Airflow Absorption Tot. Duct size

1200 m³/h 200 W 150 mm

GME EXTERNAL ROOF TILED

Available for HILIGHT GLASS / HILIGHT-X / ILLUSION / SKYDOME

Airflow Duct size


850 m³/h Absorption Tot. 210 W 150 mm

Available for LANE












GME HE MOTOR PRF0158084



GME EXTERNAL INCLINED ROOF

Airflow Absorption Tot. Duct size

1200 m³/h 200 W 150 mm KIT0147882


Available for HILIGHT GLASS / HILIGHT-X / ILLUSION / SKYDOME


GME INTERNAL INLINE

Airflow Absorption Tot. Duct size

KIT0147879

Available for 2150 m³/h HILIGHT GLASS / 200 W HILIGHT-X / ILLUSION / 150 mm SKYDOME





GOOD TO KNOW 260 | elica

≥ elica 261 GOOD TO KNOW

GOOD TO KNOW

GOOD TO KNOW

SPECIAL CHIMNEYS

SHELF KIT

STAINLESS STEEL CHIMNEY KIT



KIT0010439 Long KIT0010700 Short

Available for OM AIR

STAINLESS STEEL CHIMNEY KIT



KIT0177845

Available for

VERTIG0

STAINLESS STEEL CHIMNEY KIT H12



KIT0091876

Available for BOXIN / BOXIN NO DRIP / LEVER


LULLABY@





Good to Know

STAINLESS STEEL CHIMNEY KIT H185+H185




KIT0141458


Available for BOXIN / BOXIN NO DRIP / LEVER / HIDDEN 2.0 / HIDDEN 2.0@

BLACK CHIMNEY KIT




KIT0166364











Available for PLAT / RULES / SUPER PLAT

KIT0010439 / KIT0010700




NO RETURN VALVE



Available for

STAINLESS STEEL CHIMNEY KIT




KIT0171543

PLAT / RULES / SUPER PLAT

KIT0147858 (WOODEN)



SHELF KIT LULLABY@



KIT0147859 SHELF KIT LULLABY@ (WHITE)



KIT0177845 KIT0091876 KIT0141458 KIT0166364 KIT0171543

GOOD TO KNOW 262 | elica

♦ elica 263 GOOD TO KNOW

INSTALLATION ACCESSORIES

INSTALLATION ACCESSORIES



150x70x1500mm 1052B



150x70x1000mm 1052C



90° 150x70mm 1052F



150x70 - Ø125mm 1052G



Ø125-100mm 1052L



Ø125x1000mm 1052N



Ø125x3000mm 1052W



Ø125x1000mm 10520



Ø125 1052P



150x70 - Ø125mm 1052Q



90° Ø125mm 1052R



150x70mm 1052D



90° 150x70mm 1052E



Ø125x750mm + fascette KIT0094727



220x90x1000mm 1053M



Ø150x500mm 1053X



150x70 - Ø150mm 1053Q



Good to Know

90° 220x90mm 1053S



Ø150-125mm 1052M



Ø150x3000mm 1052AD



Ø150x1000mm 1053W



Ø150 1053Z



220x90 - Ø150mm 1053P



220x90mm 1053N



Ø150mm 1053Y



90° 220x90mm 1053R



Ø150x750mm + fascette KIT0094725



Ø150 KIT0162617

WALL UNIT AIR DIFFUSER FOR BUILT-IN FILTER PRODUCTS.

Useful for stopping objects getting into the air duct and to channel the vapour flow emitted towards the centre of the room.

GOOD TO KNOW GOOD TO KNOW

LEARN MORE ABOUT PERFORMANCE

	ENERGY CLASS	1 SPEED (airflow-noise)	2 SPEED (airflow-noise)	3 SPEED (airflow-noise)	4 SPEED * (airflow-noise)	5 SPEED * (airflow-noise)
Adéle	А	325 m³/h - 55 db(A)	435 m³/h - 61 db(A)	630 m³/h - 69 db(A)		770 m³/h - 74 db(A)
Adéle Island	А	325 m³/h - 55 db(A)	435 m³/h - 61 db(A)	630 m³/h - 69 db(A)		770 m³/h - 74 db(A)
Aplomb	А	275 m³/h - 51 db(A)	385 m³/h - 59 db(A)	495 m³/h - 64 db(A)		680 m³/h - 71 db(A)
Bloom	А	185 m³/h - 35 db(A)	310 m³/h - 52 db(A)	400 m³/h - 56 db(A)		750 m³/h - 70 db(A)
Bloom-S	А	185 m³/h - 35 db(A)	310 m³/h - 46 db(A)	400 m³/h - 53 db(A)	590 m³/h - 58 db(A)	750 m³/h - 64 db(A)
Boxin	D	140 m³/h - 48 db(A)	190 m³/h - 54 db(A)	370 m³/h - 67 db(A)		
Boxin Lux	А	255 m³/h - 50 db(A)	355 m³/h - 57 db(A)	620 m³/h - 70 db(A)		
Boxin No Drip	А	105 m³/h - 30 db(A)	250 m³/h - 53 db(A)	365 m³/h - 60 db(A)		600 m ³ /h - 69 db(A)
Ciak Lux	D	100 m³/h - 48 db(A)	130 m³/h - 54 db(A)	255 m³/h - 66 db(A)		
Circus	D	195 m³/h - 55 db(A)	368 m³/h - 56 db(A)	384 m³/h - 62 db(A)		
Cloud Seven (Duct-out)	А	235 m³/h - 43 db(A)	330 m³/h - 54 db(A)	460 m³/h - 60 db(A)	660 m³/h - 68 db(A)	770 m³/h - 71 db(A)
Cloud Seven (Filtering)	А	240 m³/h - 52 db(A)	360 m³/h - 62 db(A)	495 m³/h - 70 db(A)	570 m³/h - 70 db(A)	
Easy UX	А	260 m³/h - 45 db(A)	375 m³/h - 55 db(A)	520 m³/h - 62 db(A)		610 m³/h - 67 db(A)
Edith	А	160 m³/h - 36 db(A)	205 m³/h - 41 db(A)	335 m³/h - 53 db(A)		380 m³/h - 56 db(A)
Elibloc Ht	С	256 m³/h - 49 db(A)	368 m³/h - 58 db(A)	496 m³/h - 65 db(A)	647 m³/h - 71 db(A)	
Elite 14	D	125 m³/h - 46 db(A)	288 m³/h - 57 db(A)	304 m³/h - 62 db(A)		
Elite 26	С	240 m³/h - 44 db(A)	368 m³/h - 54 db(A)	480 m³/h - 61 db(A)		581 m³/h - 65 db(A)
Era	С	125 m³/h - 45 db(A)	155 m³/h - 47 db(A)	224 m³/h - 54 db(A)		
Era C	D	290 m³/h - 62 db(A)	344 m³/h - 66 db(A)	368 m³/h - 67 db(A)		
Flat Glass	D	195 m³/h - 55 db(A)	368 m³/h - 56 db(A)	384 m³/h - 62 db(A)		
Galaxy	С	288 m³/h - 52 db(A)	416 m³/h - 61 db(A)	559 m³/h - 69 db(A)		647 m³/h - 73 db(A)
Galaxy Island	С	288 m³/h - 52 db(A)	416 m³/h - 61 db(A)	559 m³/h - 69 db(A)		647 m³/h - 73 db(A)
Getup	А	260 m³/h - 43 db(A)	428 m³/h - 58 db(A)	530 m³/h - 62 db(A)	630 m³/h - 66 db(A)	750 m³/h - 67 db(A)
Haiku	А	155 m³/h - 34 db(A)	295 m³/h - 47 db(A)	375 m³/h - 51 db(A)	560 m³/h - 58 db(A)	690 m³/h - 63 db(A)
Haiku Island	А	155 m³/h - 34 db(A)	295 m³/h - 47 db(A)	375 m³/h - 51 db(A)	560 m³/h - 58 db(A)	690 m³/h - 63 db(A)
Hidden 2.0	А	300 m³/h - 51 db(A)	420 m³/h - 60 db(A)	600 m³/h - 67 db(A)		700 m³/h - 70 db(A)
Hidden 2.0 @	А	300 m³/h - 51 db(A)	420 m ³ /h - 60 db(A)	600 m³/h - 67 db(A)		700 m³/h - 70 db(A)
Hilight Glass H16	А	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Hilight Glass H30	А	200 m³/h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)
Hilight-X H16	А	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Hilight-X H30	А	200 m³/h - 42 db(A)	380 m³/h - 55 db(A)	475 m³/h - 62 db(A)	690 m³/h - 67 db(A)	770 m³/h - 70 db(A)
Ikona	А	250 m³/h - 47 db(A)	355 m³/h - 55 db(A)	475 m³/h - 62 db(A)		610 m³/h - 67 db(A)
lkona Light	А	250 m³/h - 47 db(A)	355 m³/h - 55 db(A)	475 m³/h - 62 db(A)		610 m ³ /h - 67 db(A)
Ikona Maxxi Pure	А	245 m³/h - 47 db(A)	360 m³/h - 56 db(A)	485 m³/h - 62 db(A)		600 m³/h - 67 db(A)

LEARN MORE ABOUT PERFORMANCE

Good to Know

	ENERGY CLASS	1 SPEED (airflow-noise)	2 SPEED (airflow-noise)	3 SPEED (airflow-noise)	4 SPEED * (airflow-noise)	5 SPEED * (airflow-noise)
Illusion H16	А	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Illusion H30	А	200 m ³ /h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)
Interstellar	А	165 m³/h - 36 db(A)	209 m³/h - 53 db(A)	336 m³/h - 54 db(A)		384 m³/h - 56 db(A)
Integrata		120m³/h - 52 db(A)	220m³/h - 61 db(A)	290m³/h - 67 db(A)		
Joy	В	288 m³/h - 51 db(A)	432 m³/h - 61 db(A)	581 m³/h - 69 db(A)		713 m³/h - 73 db(A)
Joy Island	В	288 m³/h - 51 db(A)	432 m³/h - 61 db(A)	581 m³/h - 69 db(A)		713 m³/h - 73 db(A)
Juno	А	260 m³/h - 45 db(A)	375 m³/h - 55 db(A)	620 m ³ /h - 67 db(A)		
Juno Urban	А	260 m³/h - 45 db(A)	375 m³/h - 55 db(A)	620 m³/h - 67 db(A)		
Lane	В	255 m³/h - 49 db(A)	400 m³/h - 58 db(A)	550 m³/h - 65 db(A)		650 m³/h - 68 db(A)
Lever	В	240 m³/h - 46 db(A)	336 m³/h - 54 db(A)	603 m³/h - 67 db(A)		
Lullaby@ Duct-out	А	200 m³/h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m³/h - 63 db(A)	770 m³/h - 66 db(A)
Lullaby@ Filtering	**	100 m ³ /h - 44 db(A)	155 m³/h - 53 db(A)	237 m³/h - 63 db(A)	380 m³/h - 72 db(A)	474 m³/h - 76 db(A)
Majestic No Drip	А	245 m³/h - 46 db(A)	345 m³/h - 53 db(A)	485 m³/h - 60 db(A)		600 m³/h - 66 db(A)
Missy	D	165 m³/h - 49 db(A)	225 m³/h - 55 db(A)	395 m³/h - 68 db(A)		
Om Air	А	230 m³/h - 42 db(A)	325 m³/h - 50 db(A)	510 m ³ /h - 60 db(A)		650 m³/h - 66 db(A)
Open Suite	**	364 m³/h - 64 db(A)	426 m³/h - 67 db(A)	480 m³/h - 69 db(A)		526 m³/h - 71 db(A)
Open Suite Superior	**	364 m³/h - 64 db(A)	426 m³/h - 67 db(A)	480 m³/h - 69 db(A)		526 m³/h - 71 db(A)
Pandora	А	208 m³/h - 45 db(A)	288 m³/h - 49 db(A)	496 m³/h - 59 db(A)		669 m³/h - 67 db(A)
Pandora GME	С	240 m³/h - 58 db(A)	336 m³/h - 60 db(A)	581 m³/h - 71 db(A)		713 m³/h - 72 db(A)
Pix	А	250 m³/h - 44 db(A)	358 m³/h - 53 db(A)	445 m³/h - 60 db(A)		610 m ³ /h - 65 db(A)
Plat	А	160 m³/h - 37 db(A)	315 m³/h - 50 db(A)	420 m³/h - 57 db(A)		710 m³/h - 69 db(A)
Reef	А	255 m³/h - 48 db(A)	365 m³/h - 57 db(A)	500 m ³ /h - 64 db(A)		600 m³/h - 69 db(A)
Reef Island	А	255 m³/h - 48 db(A)	365 m³/h - 57 db(A)	500 m³/h - 64 db(A)		600 m³/h - 69 db(A)
Rules	А	160 m³/h - 40 db(A)	330 m³/h - 53 db(A)	415 m³/h - 58 db(A)		700 m³/h - 71 db(A)
Seashell	**	180 m³/h - 55 db(A)	265 m³/h - 63 db(A)	335 m³/h - 67 db(A)		400 m ³ /h - 70 db(A)
Sheen-S	А	275 m³/h - 52 db(A)	385 m³/h - 59 db(A)	495 m³/h - 65 db(A)		650 m³/h - 71 db(A)
Shining	А	160 m³/h - 36 db(A)	205 m³/h - 41 db(A)	335 m³/h - 53 db(A)		380 m³/h - 56 db(A)
Shire	А	275 m³/h - 52 db(A)	495 m³/h - 64 db(A)			650 m³/h - 71 db(A)
Shy-S	А	275 m³/h - 52 db(A)	385 m³/h - 59 db(A)	495 m³/h - 65 db(A)		650 m³/h - 71 db(A)
Skydome H16	А	275 m³/h - 51 db(A)	425 m³/h - 62 db(A)	540 m³/h - 68 db(A)	660 m³/h - 72 db(A)	720 m³/h - 74 db(A)
Skydome H30	А	200 m³/h - 40 db(A)	380 m³/h - 50 db(A)	465 m³/h - 53 db(A)	690 m ³ /h - 63 db(A)	770 m³/h - 66 db(A)
Spot NG	D	195 m³/h - 55 db(A)	224 m³/h - 56 db(A)	368 m³/h - 62 db(A)		
Spot Urban	В	270 m³/h - 52 db(A)	375 m³/h - 59 db(A)	630 m ³ /h - 71 db(A)		
Stripe	В	304 m³/h - 50 db(A)	432 m³/h - 58 db(A)	603 m ³ /h - 65 db(A)		757 m³/h - 69 db(A)

elica 267 GOOD TO KNOW GOOD TO KNOW 266 | elica

^{*}Booster time speeds
** Model not subject to compulsory energy certification.

^{*}Booster time speeds
** Model not subject to compulsory energy certification.

Good to Know

LEARN MORE ABOUT PERFORMANCE

	ENERGY CLASS	1 SPEED (airflow-noise)	2 SPEED (airflow-noise)	3 SPEED (airflow-noise)	4 SPEED * (airflow-noise)	5 SPEED * (airflow-noise)
Summilux	А	165 m³/h - 36 db(A)	205 m³/h - 41 db(A)	336 m³/h - 53 db(A)		384 m³/h - 56 db(A)
Super Plat	А	175 m³/h - 37 db(A)	325 m³/h - 50 db(A)	415 m³/h - 57 db(A)	600 m³/h - 65 db(A)	740 m³/h - 70 db(A)
Sweet	А	230 m³/h - 46 db(A)	335 m³/h - 54 db(A)	465 m³/h - 61 db(A)		580 m³/h - 66 db(A)
Tamaya 2.0 S	А	300 m³/h - 52 db(A)	445 m³/h - 60 db(A)	610 m³/h - 68 db(A)		750 m³/h - 72 db(A)
Tribe	А	255 m³/h - 48 db(A)	365 m³/h - 57 db(A)	500 m³/h - 64 db(A)		600 m³/h - 69 db(A)
Tribe Island	А	255 m³/h - 48 db(A)	365 m³/h - 57 db(A)	500 m³/h - 64 db(A)		600 m³/h - 69 db(A)
Vertigo	В	310 m³/h - 50 db(A)	450 m³/h - 59 db(A)	610 m³/h - 66 db(A)		740 m³/h - 70 db(A)
Verve	С	110 m³/h - 52 db(A)	160 m³/h - 61 db(A)	205 m³/h - 68 db(A)		
Wave UX	А	260 m³/h - 45 db(A)	375 m³/h - 55 db(A)	520 m³/h - 62 db(A)		610 m ³ /h - 67 db(A)

	ENERGY CLASS	1 SPEED m³/h-db(A)	2 SPEED m³/h-db(A)	3 SPEED m³/h-db(A)	4 SPEED m³/h-db(A)	5 SPEED m³/h-db(A)	6 SPEED m³/h-db(A)	7 SPEED m³/h-db(A)	8 SPEED m³/h-db(A)	9 SPEED m³/h-db(A)	BOOSTER 1* m³/h-db(A)	BOOSTER 2* m³/h-db(A)
NT FIT (Duct-out)	А	165 - 45	320 - 52	385 - 57							515 - 63	620 - 68
NT FLAME (Duct-out)	А	225 - 48	315 - 56	400 - 62							485 - 66	600 - 71
NT FLAME (Filtering)	А	185 - 53	300 - 63	380 - 68							460 - 72	550 - 77
NT LIBRA (Duct-out)	А	185 - 46	285 - 54	430 - 63							540 - 69	610 - 72
NT LIBRA (Filtering)	А	170 - 48	275 - 58	415 - 67							495 - 71	545 - 73
NT ONE (Duct-out)	A+	130 - 34	205 - 44	235 - 47	280 - 51	305 - 54	335 - 56	370 - 58	390 - 59	410 - 61	640 - 72	
NT ONE (Filtering)	A+	105 - 40	170 - 50	200 - 53	235 - 57	260 - 59	290 - 62	320 - 64	340 - 65	360 - 67	545 - 77	
NT PRIME (Duct-out)	А	185 - 46	285 - 54	430 - 63							540 - 69	610 - 72
NT PRIME (Filtering)	А	170 - 48	275 - 58	415 - 67							495 - 71	545 - 73
NT SWITCH (Duct-out)	A+	135 - 33	190 - 41	220 - 44	260 - 49	290 - 52	315 - 54	350 - 57	375 - 59		590 - 70	630 - 71
NT SWITCH (Filtering)	A+	110 - 39	160 - 48	190 - 51	230 - 55	255 - 58	280 - 60	310 - 62	330 - 64		540 - 75	550 - 76

*Booster	time	sneeds	

^{**} Model not subject to compulsory energy certification.

LEARN	MORE
-------	------

GOOD TO KNOW

	REDUCTION 150/125	ODOUR FILTER ALERT	GREASE FILTER ALERT	NO RETURN VALVE
Adéle	√	$\sqrt{}$	√	√
Adéle Island	√	V	√	V
Aplomb		V	√	V
Bloom		$\sqrt{}$	√	V
Bloom-S		V	√	V
Boxin	√			
Boxin Lx	√			V
Boxin No Drip	√	$\sqrt{}$	√	
Ciak Lux				
Circus	√			
Cloud Seven		V	√	
Easy UX		V	√	
Edith		V	√	
Elibloc Ht				
Elite 14				√
Elite 26		V	√	√
Era				√
Era C				√
Flat Glass	√			√
Galaxy		V	√	√
Galaxy Island		√	√	√
Getup		√	√	
Haiku	√	√	√	√
Haiku Island	√	√	√	√
Hidden 2.0	√	√	√	√
Hidden 2.0 @	√	√	√	√
Hilight Glass H16/H30		√	√	
Hilight-X H16/H30		√	√	
Ikona		√	√	√
Ikona Light		√	√	
ikona Maxxi Pure		√	√	
Illusion H16/H30		√	√	
Interstellar		√	√	
Integrata				
Joy	√	√	√	
Joy Island		√	√	√

	REDUCTION 150/125	ODOUR FILTER ALERT	GREASE FILTER ALERT	NO RETURN VALVE
Juno				
Juno Urban				
Lane	√	V	√	√
Lever				√
Lullaby@ Duct-Out		$\sqrt{}$	√	
Majestic No Drip		$\sqrt{}$	√	√
Missy				√
Om Air		V	√	
Open Suite		$\sqrt{}$	√	
Open Suite Superior			√	
Pandora		$\sqrt{}$	√	
Pix		$\sqrt{}$	√	
Plat		$\sqrt{}$	√	
Reef		$\sqrt{}$	√	√
Reef Island		$\sqrt{}$	√	√
Rules		$\sqrt{}$	√	√
Seashell				
Sheen-s			√	√
Shining			√	
Shire			√	√
Shy-S			√	√
Skydome H16/H30			√	
Spot NG	√			
Spot Urban	√			√
Stripe		$\sqrt{}$	√	√
Summilux			√	
Super Plat		√	√	
Sweet Duct-out	√		√	√
Sweet Filtering			√	√
Tamaya 2.0 S			√	
Tribe			√	√
Tribe Island			√	√
Vertigo			√	√
Verve				
Wave UX		√	√	

GOOD TO KNOW 268 #elica

♦ elica 269 GOOD TO KNOW

GOOD TO KNOW TECHNICAL INFORMATIONS


LEARN MORE ABOUT WEIGHT


In kitchen designs featuring an island, suspended or ceiling hood (built into a false ceiling), it is important that the plasterboard structure is able to support the weight of the hood itself.

The weight varies depending on the model and overall dimensions, and the following table is a useful aid in developing a suitable support without needing to forgo a practical and stylish open space.


	PESO NETTO WEIGHT
ADÉLE ISLAND	29,00 Kg
CLOUD SEVEN (DUCT-OUT)	17,70 Kg
CLOUD SEVEN (FILTERING)	19,50 Kg
EASY UX	11,65 Kg
EDITH	19,25 Kg
GALAXY ISLAND	24,50 Kg
HAIKU ISLAND (32 cm)	33,70 Kg
HAIKU ISLAND (120 cm)	46,30 Kg
HAIKU ISLAND (180 cm)	55,10 Kg
HILIGHT GLASS (H16)	29,10 Kg
HILIGHT GLASS (H30)	30,90 Kg
HILIGHT GLASS (NO MOTOR)	24,80 Kg
HILIGHT-X (H16)	24,00 Kg
HILIGHT-X (H30)	25,80 Kg
HILIGHT-X (NO MOTOR)	20,00 Kg
IKONA	25,00 Kg
IKONA LIGHT	11,00 Kg
IKONA MAXXI PURE	23,00 Kg
ILLUSION (H16)	23,00 Kg
ILLUSION (H30)	23,70 Kg
ILLUSION (NO MOTOR)	19,50 Kg
INTERSTELLAR	27,10 Kg
JOY ISLAND	28,75 Kg
JUNO	13,40 Kg
JUNO URBAN	12,70 Kg


	PESO NETTO WEIGHT
LULLABY@ (DUCT-OUT)	38,20 Kg
LULLABY@ (FILTERING)	49,10 Kg
OPEN SUITE SUPERIOR (80CM)	40,20 Kg
OPEN SUITE SUPERIOR (160CM)	67,00 Kg
PIX	16,40 Kg
REEF ISLAND	26,20 Kg
SEASHELL	33,80 Kg
SHINING	19,00 Kg
SKYDOME (H16)	25,20 Kg
SKYDOME (H30)	27,20 Kg
SKYDOME (NO MOTOR)	21,70 Kg
SUMMILUX	22,20 Kg
TRIBE ISLAND	26,00 Kg
WAVE UX	11,80 Kg

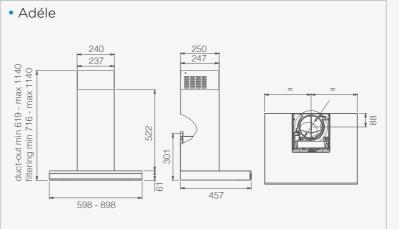


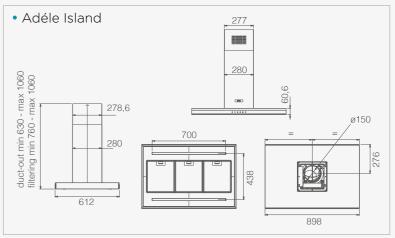



Good to Know

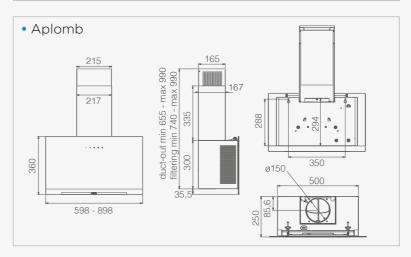


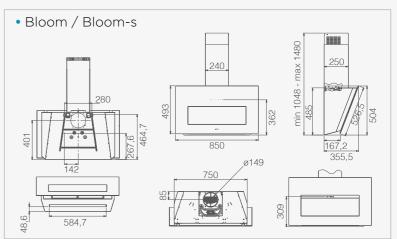

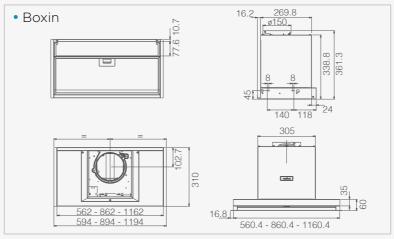

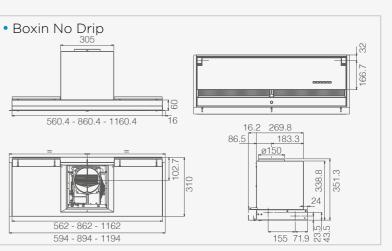


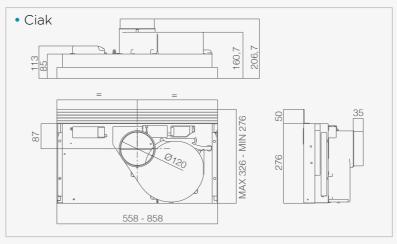


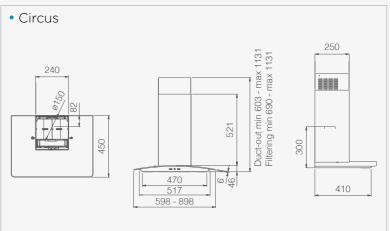



TECHNICAL INFORMATIONS


TECHNICAL INFORMATIONS

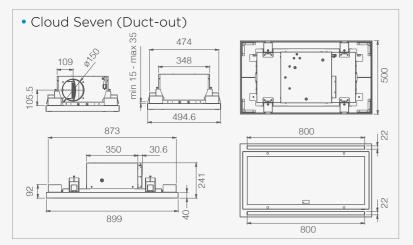


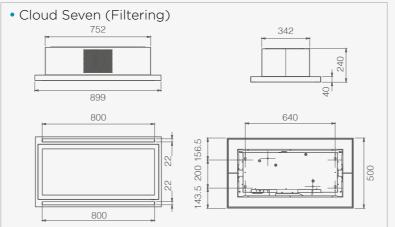


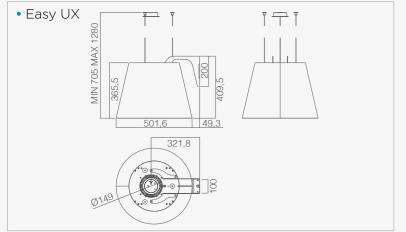


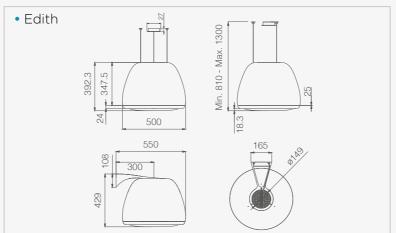


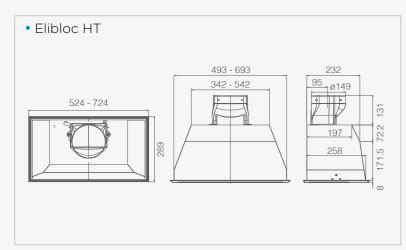


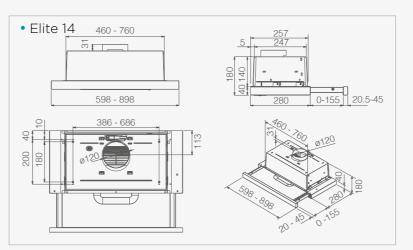


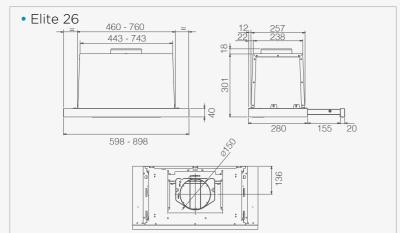


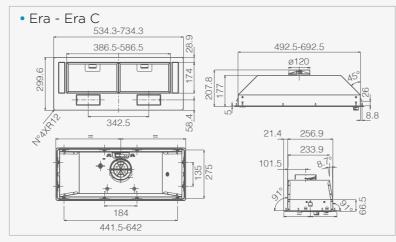


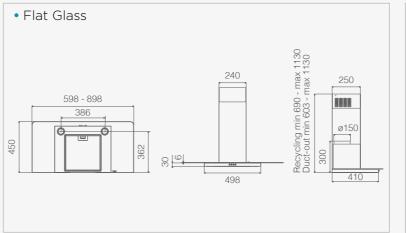


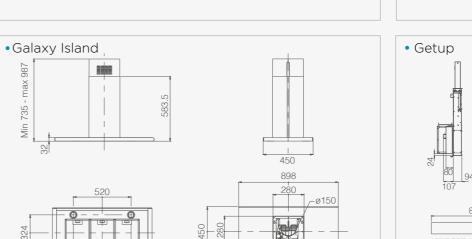


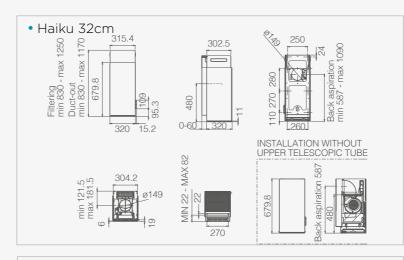


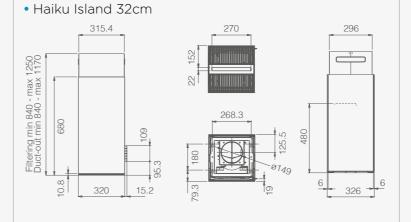


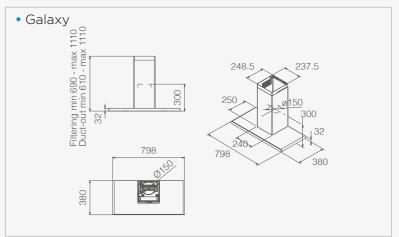


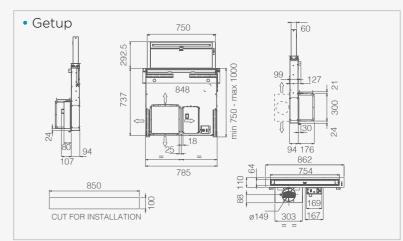


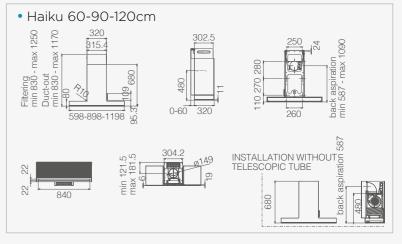


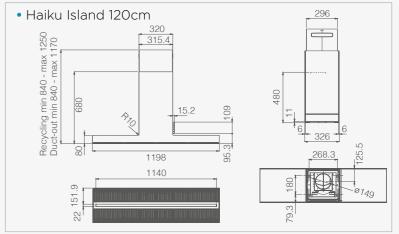


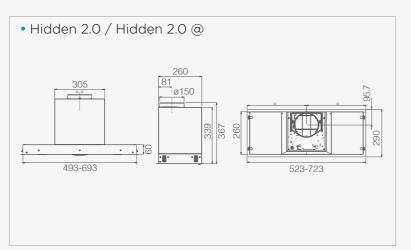


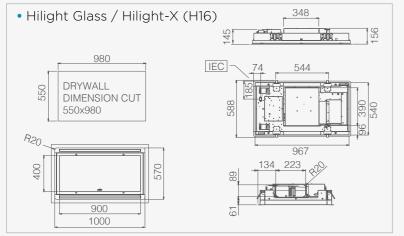


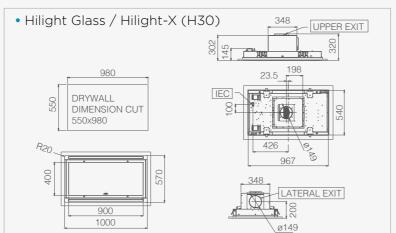


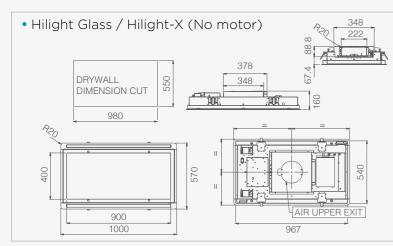


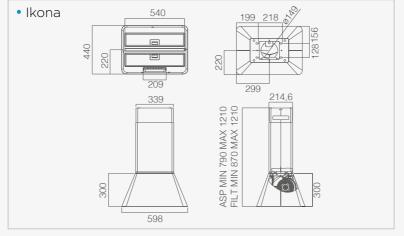


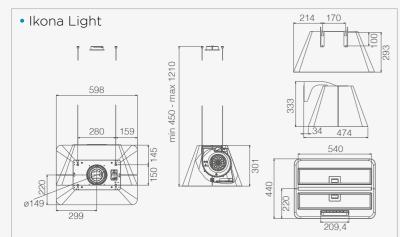


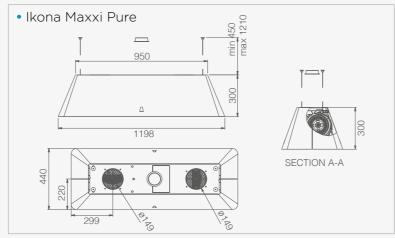


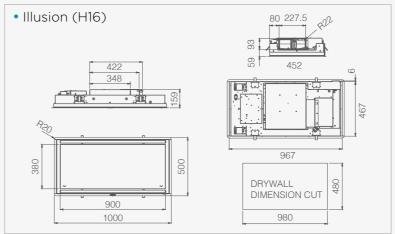


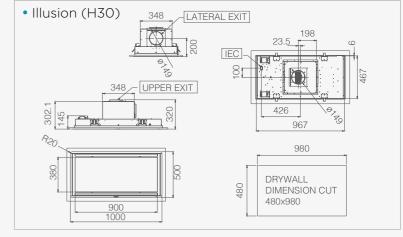

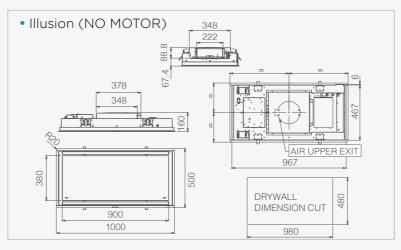


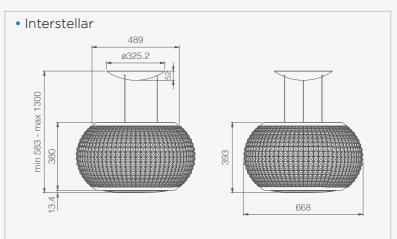


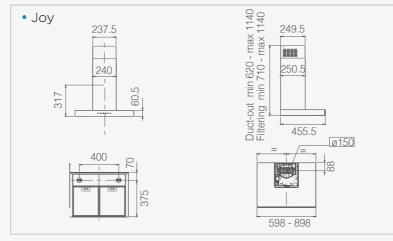


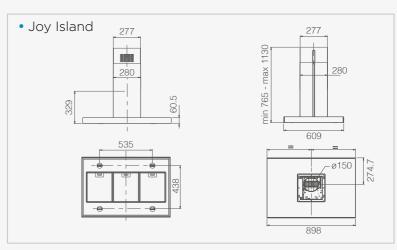





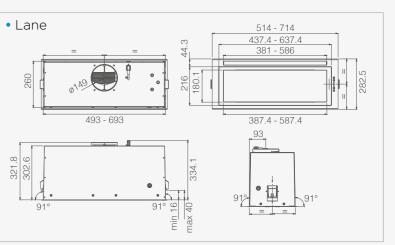


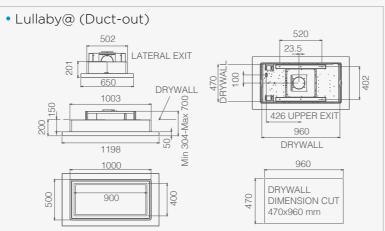


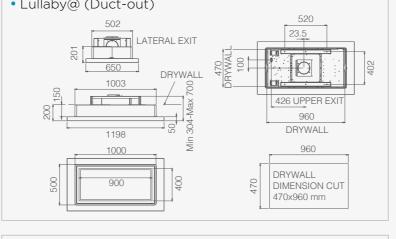


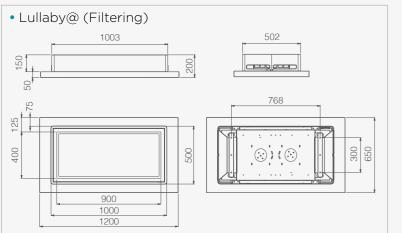


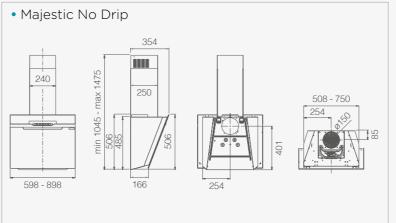


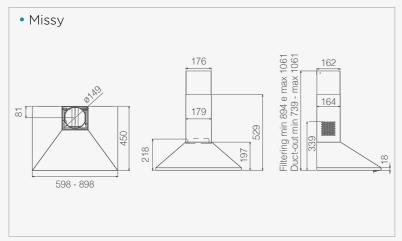


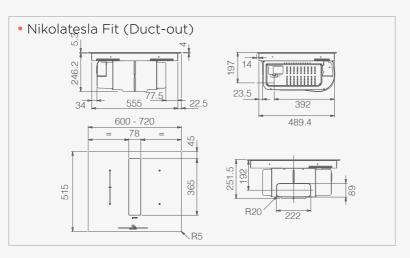

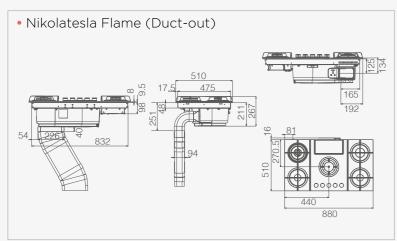


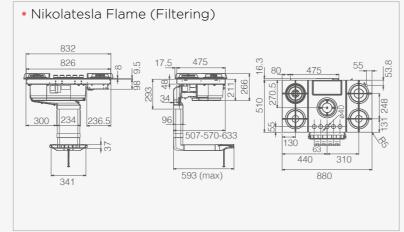


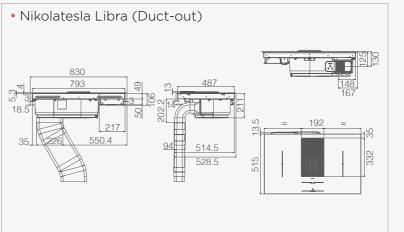


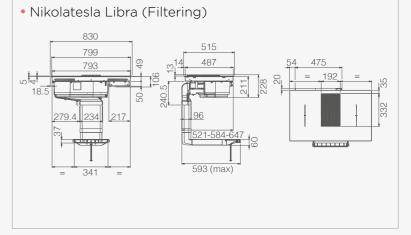



Good to Know

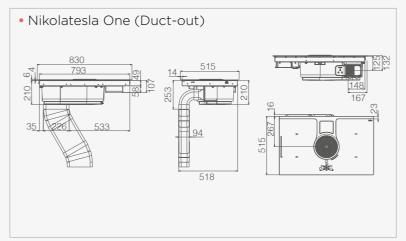


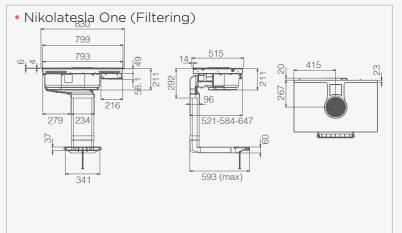

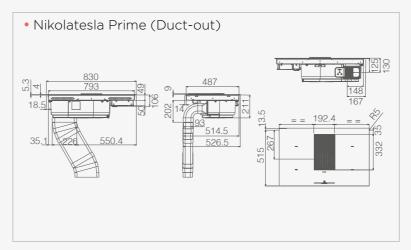

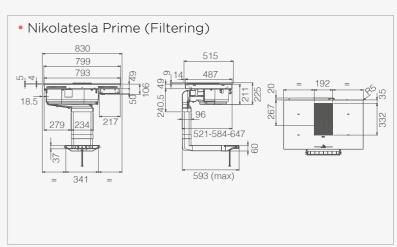


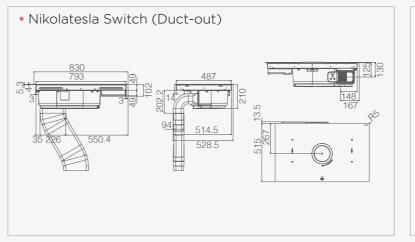


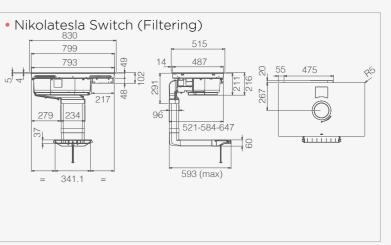



TECHNICAL INFORMATIONS


TECHNICAL INFORMATIONS

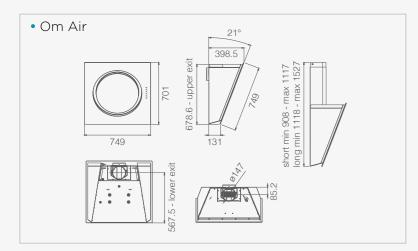


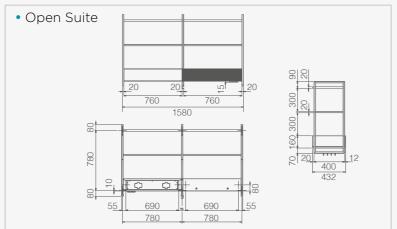


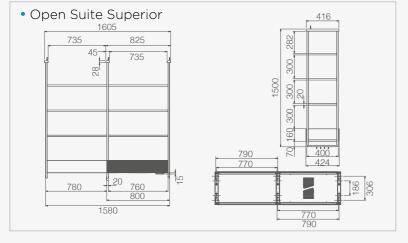


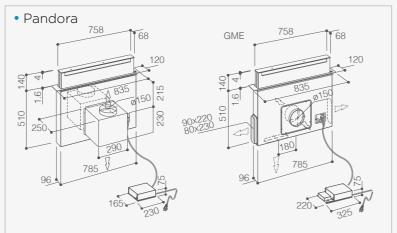


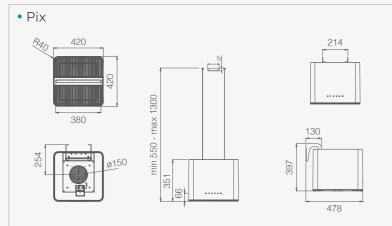


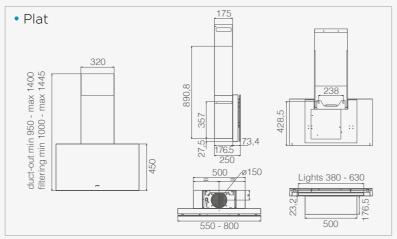


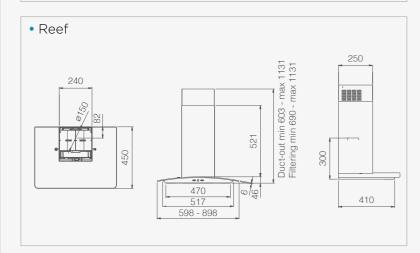


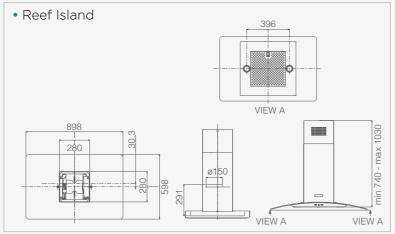


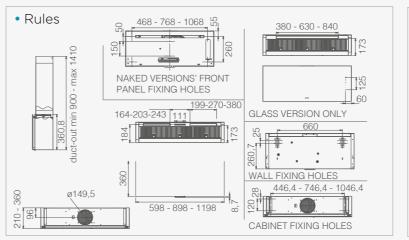


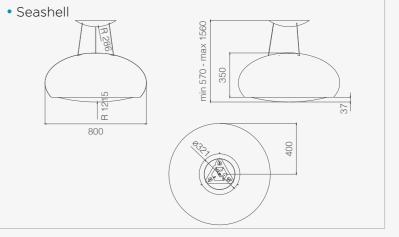


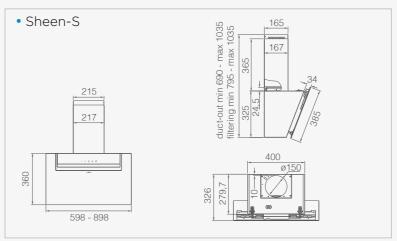


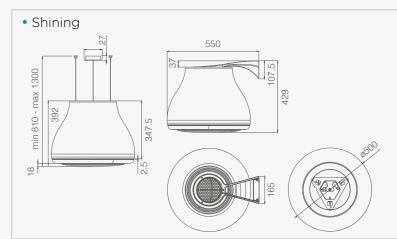


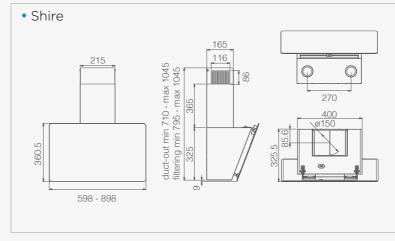


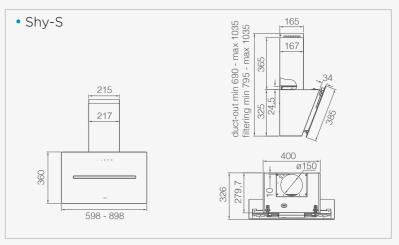


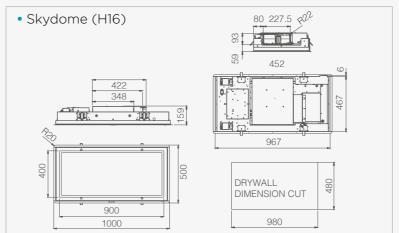


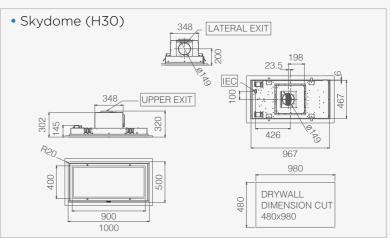


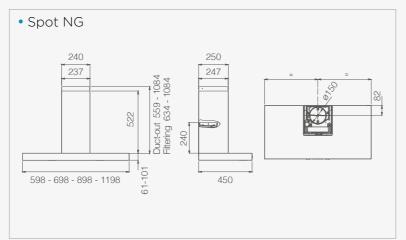


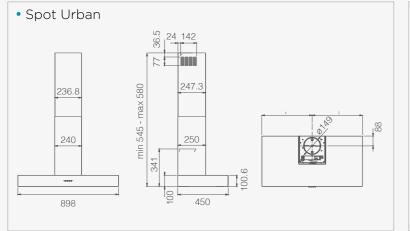


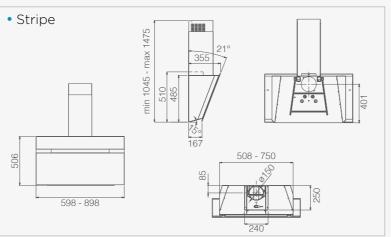


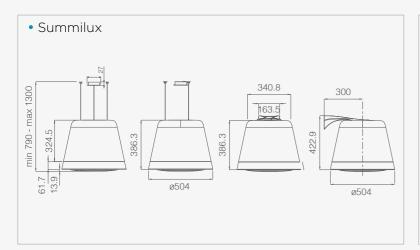


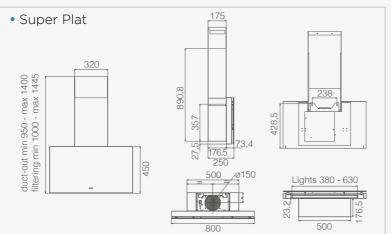

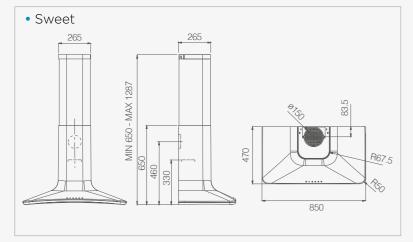


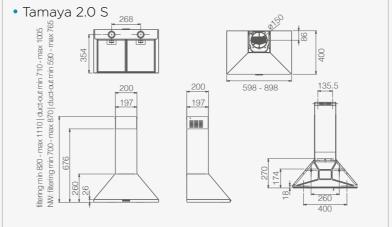


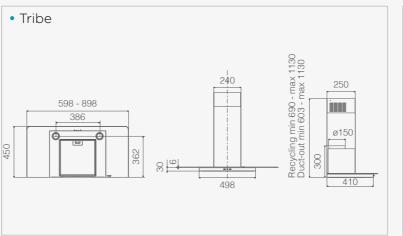


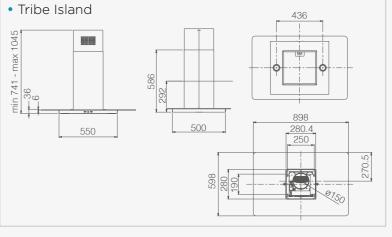

Good to Know

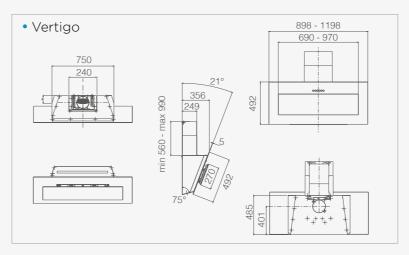

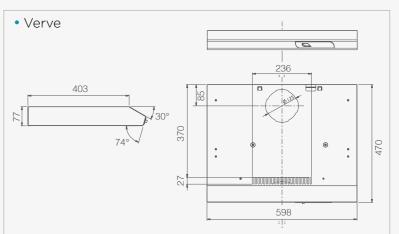

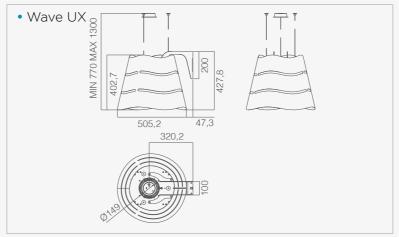

THE HOOD AND YOU THE HOOD AND YOU

THE IMPORTANCE OF THE HOOD IN THE KITCHEN

The extractor hood is an essential tool in the kitchen, helping to improve air quality and maintain a healthy environment. Combustion fumes, unpleasant smells, odours and cooking vapours are, in fact, both annoying and harmful not only for people, but can also deteriorate furniture and walls. It is, therefore, important to ensure effective, easy-to-use and silent extraction that can eliminate them, leaving the kitchen more hygienic and cleaner.

With its eclectic function, the hood is now used not only as a basic extractor unit, but also as a light source to illuminate the hob, to create softer atmospheres or as an authentic furnishing accessory. The numerous models and finishes available on the market allow you to customise the space according to the design of your kitchen and individual taste: whether it is minimal and linear or a statement, signature piece, the hood today has become a central element in our kitchens.

WHICH HOOD SHOULD I CHOOSE?

It can be difficult to find the best choice among the many models on offer. To find the hood that best suits your space, personal taste and lifestyle, you should consider several key factors: correct extraction power, type of installation and kitchen design. For the best air removal performance, the hood must offer the right extraction power. Take a look at the size of your kitchen and your cooking habits. With a simple calculation, it is possible to define the ideal flow rate for each room: just multiply the room volume by 10. Ease-of-use and silence are another two important variables that will help you achieve the best user experience.

The type of installation is essential in narrowing the field and finding the category you need for your kitchen.



BUILT-IN

The hood is built into the cabinet, disappearing from view.



WALL-MOUNTED

The kitchen is positioned against the wall with the hob adjacent to the wall. Wall-mounted hood.




ISLAND

The kitchen is positioned in the centre of the room with the hob away from the wall. Ceiling-mounted hood.



CORNER


The kitchen is laid out between two walls of the room and the hob is positioned close to the corner. Install the hood between adjacent

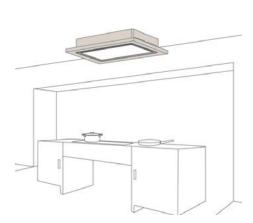

Good to Know

CEILING

The kitchen is positioned either in the centre of the room or against the wall. The hood acts as both a light and extractor and is installed in the false ceiling.

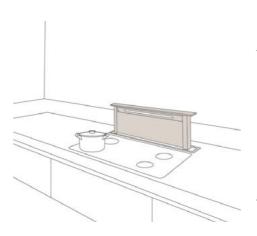

DOWNDRAFT

The hob is positioned away from the wall, on Install the hood on the ceiling, suspended like a peninsula counter or in the centre of the room. Install the hood directly on the top.



SUSPENDED

a pendant light.



EXTRACTOR HOB

The hood is integrated into the hob. Extraction from below


GOOD TO KNOW 282 | elica THE HOOD AND YOU THE HOOD AND YOU

HOW IS IT INSTALLED?

Perfect hood operation is ensured by correct installation, guaranteed by specialised personnel. Assembly and maintenance vary according to the two types of hood: extractor and filter. Many Elica models are designed to work in both versions.


Before starting installation of your hood, bear in mind these simple, basic rules:

- Follow all the steps indicated in the instruction booklet;
- Connect the extractor hood to the outside using a dedicated pipe with a diameter of 120-150mm: a shorter length and the absence of bends guarantee the best performance.
- · Respect the minimum distance from the hob indicated in the booklet to avoid damage to the operational parts and protect personal safety;
- Ensure that the location of the electrical outlet is close to the product for connection;
- In case of difficulty, request the intervention of a specialised technician.



FILTER HOOD

The filter hood eliminates fumes and unpleasant odours via dedicated filters and returns clean air to the kitchen. This type of hood is suitable in situations without no external evacuation

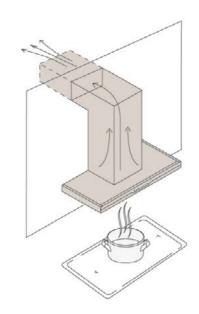

EXTRACTOR HOOD

The extractor hood expels the air outside the home. It is the most common type as it guarantees high performance, high flow rate and minimum noise.

MAINTENANCE

To ensure that your hood lasts for a long time and continues to work correctly, the first step is to keep the filtering system in tip-top condition.



Filter hoods feature two types of filter:

the grease filter which removes the grease from the air dispersed during cooking and the odour filter. Both must be regularly cleaned and replaced to ensure the very best performance.

- The grease filter protects your hood by trapping grease particles. The grease filter can be made of aluminium or stainless steel and requires periodic cleaning by hand with a neutral detergent or in the dishwasher at a low temperature (*), or alternatively in a paper version. In this case, it must be replaced every month based on use. • The odour filter with activated carbon, installed on filter hoods, captures and traps odour particles
- in the air. Remember to replace it every 3-4 months. Long-life odour filters, on the other hand, last longer. They can, in fact, be regenerated and washed, dried and replaced every two years. A few simple, minor precautions are all it takes to keep your hood hygienic and working efficient over time.

(*) Always check how to wash the filter in the product instruction booklet

GOOD TO KNOW 284 **elica** TECHNICAL INFORMATIONS TECHNICAL INFORMATIONS


ENERGY LABEL

The Energy Label constitutes a fundamental tool for choosing the most suitable extractor hood for the user's needs. The label provides instant information on energy consumption and the level of efficiency of the product's perfor-

Each page of our catalogue contains a symbol indicating the energy class of the product presented.

For obtaining detailed information on each version of the desired model, including all the parameters appearing on the energy label, proceed as follows:

- Identify the **product code** of the relevant model
- Visit the website www.elica.com and go to the DOWNLOADS section of the ASSISTANCE page, insert the product code in the search field and download the PDF document (Product Fiche) listing all the product characteristics, as per EU regulations no. 65/2014 and 66/2014.

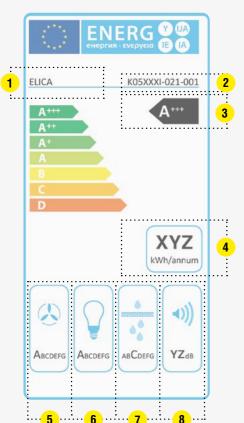

- SUPPLIER NAME OR BRAND.
- MODEL IDENTIFICATION CODE.
- ENERGY EFFICIENCY CLASS

A/A+/A++/A+++ MAXIMUM EFFICENCY - D MINIMUN.

- ESTIMATED ANNUAL ENERGY CONSUMPTION
- For standard use
- FLUID DYNAMIC EFFICIENCY CLASS

Indicates the efficiency with which the hood is able to extract vapours through

A MAXIMUM EFFICENCY - G MINIMUN.

LIGHTING EFFICIENCY CLASS

Indicates the efficiency with which the hood is able to illuminate the cooker hob A MAXIMUM EFFICENCY - G MINIMUN

GREASE FILTERING EFFICIENCY CLASS

Indicates the efficiency with which the hood filters grease generated through

A MAXIMUM EFFICENCY - G MINIMUN.

NOISE LEVEL

Indicates the maximum noise level generated by the product during normal use.

WELCOME TO ELICA SERVICE

Good to Know

SERVICE NUMBER

+ 353 (0)14136400

A specialized support center available from Monday to Friday from 9 am to 13 am and from 14 pm to 17 pm.

EMAIL FOR TECHNICAL SUPPORT

KAL-SCL-Shared-Mailbox@kal.ie

SERVICE CENTRES

Elica's service, through a network of 35 selected service partners, guaranteeing widespread coverage throughout Italy.

DEDICATED SUPPORT ON ELICA.COM

Instruction handbooks can be downloaded directly on elica.com. For further information, a technical support form is also available.

ACCESSORIES AND ORIGINAL SPARE PARTS

Proper maintenance and the regular replacement of the carbon filters is essential in guaranteeing the perfect operation of our products.

Carbon and grease filters, accessories (ex. pipings, remote controls and lamps) and cleaning products are available on shop.elica.com.

24-MONTH WARRANTY

All Elica products enjoy a 2-year manufacturer's warranty, effective from the date of purchase.



GOOD TO KNOW 286 | elica

REALIZED BY ELICA TEAM

BARBARA PERSIGILLI POETA FRANCESCA

Graphic Design and Coordination

IN COLLABORATION WITH

MMG - GALLARATE

Project Art Direction

ARCHÈ AGENCY - PESARO

Scenic Art Direction Photorealistic 3D

SELECOLOR - FIRENZE

Post Production
Color Separation

GRAFICHE ANTIGA - TREVISO

Printing



This catalogue is of exclusive property of Elica spa. All rights are reserved. Any form of total or partial reproduction of catalogue is strictly forbidden.

The printing process do not always permit a faithful reproducton of tones and materials of originals.

Elica may at any time modify the specifications and details of the products present in the catalogue.



Elica Ireland

KAL (Kitchen Accessories Limited)
Phone: 01-413-6400
Email: kalcsu@kal.ie
4078 Kingswood Road,
Citywest, Dublin 24
Ireland

abdistributors

Elica Northern Ireland

AB Distributors
Phone: 028-9023-5088
Email: mail@abdistributors.co.uk
AB Distributors
2 Cromac Place
The Gasworks
Belfast
BT7 2JB
United Kingdom

Elica

Via Ermanno Casoli, 2 60044 Fabriano AN Italy T +39 0732 6101 F +39 0732 610249

