

# **PRODUCT CATALOGUE**



THE REAL PROPERTY OF THE REAL

T





The local state of the state of the





2022/23

Building Products

Roofing

Flooring

Passive Fire Protection

# **CASE STUDIES**

# **CLAYTON HOTEL**

PROJECT FACTS Location: Ballsbridge, Dublin Sector: Hospitality Featured Product: RESITRIX® Waterproofing Membrane TATA Steel Colorcoat Urban

# HOWTH YACHT CLUB

PROJECT FACTS Location: Howth, Dublin Sector: Leisure Featured Product: Renolit Alkorplan F Xtratherm FR ALU

# **CHAPTER HOUSE**

PROJECT FACTS Location: Abbey Street, Dublin Sector: Public Appointments Service Featured Product: IVC Concept 70 Toronto T03

# CITYWEST INDUSTRIAL UNIT

PROJECT FACTS Location: Dublin Sector: Industrial Featured Product: Sherwin-Williams Resuthan SL23 Resupen WB Colour Flint









# A SELECTION OF PRODUCTS FROM OUR RANGE



# CONTENTS

# **BUILDING PRODUCTS**

Breather Membranes	8	Com
Building Envelope Solutions	10	C
Torch On and Underslating Membrane	12	А
Fibre Cement and Tile Backer Boards	14	S
Joint Compounds	16	Luxur
Oxide Protective Paint	17	Home
Radon and Gas Protection System	18	Rubb
Gas and Hydrocarbon Barrier Protection		Hosp
System	20	Broad
Construction Films and Damp Proofing 2	20	Comr
Artificial Grass	21	Prem
Floor Protection Sheets	21	C
Door Handles	22	Soun
Composite Decking and Railing	24	Resin
Decorative Stone Cladding	26	Subfl
Adhesives	28	
Silicones and Sealants	36	
Building Products	40	
Cleaners	47	
Expanding Foams	48	
Floor Levelling Compounds	49	Wall
Roofing and Bituminous Products	49	Pipe a
Tapes	52	Speci
Loft Ladders	53	Linea

# **ROOFING PRODUCTS**

56
58
60
62
63
64
64
65
66
67
68
69

# FLOORING PRODUCTS

Commercial Heterogenous Vinyl 7	72
Compact Flooring	73
Acoustic Flooring	74
Safety Flooring	76
Luxury Vinyl Tiles 7	78
Homogenous Vinyl and Linoleum 7	79
Rubber Flooring 8	30
Hospitality & Leisure Patterned	
Broadloom 8	32
Commercial Carpet Tiles 8	33
Premium Coating Products 8	34
Decorative Mineral Coating	34
Sound and Vibration Insulation	35
Resin Surfaces 8	36
Subfloor and Preparation Materials 8	38



# PASSIVE FIRE PROTECTION PRODUCTS

Wall and Penetration Sealing	92
Pipe and Cable Penetration Closing	92
Specialist Sealants	93
Linear Movement and Specialist	
Building Gap Seals	94

# **BUILDING PRODUCTS**

Laydex was founded to supply the Builders Merchant and Hardware Retailers of Ireland with a range of torch-on membranes manufactured by Index in Italy.

From those modest beginnings, we are now proud to offer our merchant customers the most comprehensive range of quality building materials available on the Irish market all sourced from market leading global manufacturers.

We have diversified our offering and, while we still supply torch-on membranes, we now supply a range of pitched roof breather membranes, a full range of damp proofing materials, gas resistant membranes, and cement boards to name a few. We have stayed at the forefront of the Irish Construction industry demands and our product offering leads the way in terms of both quality and price.

We are proud to offer a premium service and have on-site technical expertise and over 40 years of in-house experience in the construction industry available to our customers on a daily basis.





QUALITY PRODUCTS



CERTIFICATION TECHNICA

**TECHNICAL SUPPORT** 

Through our Builders Merchants Division we supply a vast portfolio of building products to all Builders Merchants and hardware outlets on the island of Ireland.























HIGH QUALITY BUILDING CHEMICALS







# **BREATHER MEMBRANES**

Corotop Breathable Membranes form the water impermeable layer under the roof coverings in a pitched roof system. They can be used on open rafter (unsupported) or fully supported pitched roofs.

The function of the underlay is to isolate the building from water ingress that may penetrate the roof coverings such as wind driven rain. In addition, the low vapour resistance of the underlays can, when correctly incorporated into a designed roofing system, assist with the satisfactory management of water vapour within the roof system.


# Corotop Breathable Membranes provide a barrier which:

- Prevents the ingress of windblown rain, dust and snow,
- Has adequate strength to resist wind load,
- Offers resistance to tearing during installation,
- Remains flexible at low ambient temperatures,
- Facilitates the control of harmful surface and interstitial condensation in the roof by allowing the safe dispersal of water vapour,
- Reduces heat loss caused by air movement through the attic space once installed with no ventilation.





# **COROTOP/BREATHE-X GREY 100g/m<sup>2</sup>** Breathable 3-Layer Roofing Membrane



Corotop Grey is a vapour permeable, 3-layer roof membrane consisting of functional film.

The functional film provides resistance to water penetration and regulates vapour

permeability balance in a roof system. Applied only on partly-boarded roofs.

#### **COROTOP BLUE 140g/m<sup>2</sup>** Breathable 3-Layer Roofing Membrane



Corotop Blue is the 3-layer vapour permeable membrane highly resistant to mechanical damages and outside factors including UV- rays or high temperatures.

It is characterised by high durability, guarantees comfort during application, even in difficult weather conditions. The product has also above-average technical parameters in its class.

# **COROTOP COROTEX 185g/m<sup>2</sup>** High Resistance Reinforced Breathable Membrane



Extremely durable roof membrane recommended to clients searching for strong and durable products providing prolonged expected life. Corotop Corotex minimises heat loss.

It is highly resistant to water penetration and damages.

#### COROTOP HOUSEWRAP 100g/m<sup>2</sup> Highly Vapour Permeable Wind Insulation



Corotop Housewrap is a highly vapour permeable membrane. The product is used to prevent the escape of heat to protect the insulation against the

blowing particles of heat insulation and settling the dust in it.

# COROTOP/BREATHE-X BEIGE 120g/m<sup>2</sup> High Resistance Breathable Membrane




The membrane's high resistance to mechanical damages enables safe work at a height regardless of weather conditions.

Corotop Breathable Membranes form the water impermeable layer under the roof coverings

in a pitched roof system. They can be used on open rafter (unsupported) or fully supported pitched roofs.

# **COROTOP BEIGE STRONG 160g/m<sup>2</sup>** High-Grammature Membrane



The high-grammature membrane with strong structure. It does not break under heavy load or increased friction and thus it is recommended especially on fully-boarded roofs.

Light colour reflects sun rays, that provides better insulation. Corotop Strong means the same quality for many years of usage and guaranteed durability.

# **COROTOP RED STRONG 180g/m<sup>2</sup>** 3-Layer Vapour Permeable Membrane



Corotop Red Strong is a very durable, 3-layer and highly vapour permeable membrane produced by thermobonding method which guarantees strong connection between layers.

Using this membrane increases the safety during application and supports moves on a roof slope. It is recommended especially on fully-boarded roofs because of very good resistance parameters.



Product	Size	Mass per Unit Area	Code	Pallet
COROTOP GREY/Breathe-X	1.5m x 50m	100g/m²	610062	46
COROTOP BEIGE/Breathe-X	1.5m x 50m	120g/m²	610063	39
COROTOP BLUE	1.5m x 50m	140g/m²	610064	39
COROTOP BEIGE STRONG	1.5m x 50m	160g/m²	610060	33
COROTOP COROTEX	1.5m x 50m	185g/m²	610061	20
COROTOP RED STRONG	1.5m x 50m	180g/m²	610058	30
COROTOP HOUSEWRAP	2.7m x 100m	100g/m²	610077	20

# **BUILDING ENVELOPE SOLUTIONS**

# Tyvek<sup>®</sup> Building Envelope Solutions help make buildings more durable, comfortable, and energy-efficient.




Whether it's a skyscraper or a single-family home, the building envelope is an essential line of defense against air, water and wasted energy.

DuPont<sup>™</sup> Tyvek<sup>®</sup> offer solutions that meet or exceed codes, extend building life, and help reduce fossil fuel consumption. They resist moisture and air, but are highly permeable, to reduce the risk of condensation damage, wood rot or mold growth.

Product	Code	Size	Weight	Mass per Unit Area	Pallet
Tyvek Supro	003701	1.0m x 50m	11kg	145g/m²	24
Tyvek Supro Plus	003703	1.5m x 50m	11kg	145g/m²	24
Housewrap	003709	2.8m x 100m	18kg	63g/m²	24
Airguard Control	003721	1.5m x 50m	8.5kg	108g/m²	24
Airguard Reflective	003723	1.5m x 50m	11.5kg	149g/m²	25
Airguard Smart	003722	1.5m x 50m	10.5kg	139g/m²	24
Fire Curb	003799	1.5m x 50m	5.5kg	66g/m²	24
StructureGuard	non stock product	1.4m x 100m 2.7m x 100m	9kg 18kg	58g/m²	24
Tyvek Reflex	003710	2.7m x 100m	22.5kg	83g/m²	20
UV Facade	003724	1.5m x 50m	15kg	195g/m²	24



# **REALITY CHECK OF 36 ROOF UNDERLAYS**

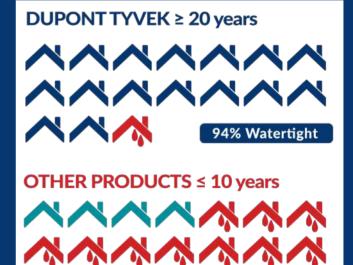

21% Watertight

Underlay samples were taken from 36 roofs by an independent notified industry expert and tested for watertightness in an accredited laboratory.

DUPONT<sup>™</sup> TYVEK<sup>®</sup> NOW OFFERS A 15-YEAR WARRANTY



# DUPONT<sup>™</sup> SUPRO

Tyvek<sup>®</sup> Supro is the market-leading breather membrane, helping to protect roofs against wind and water, and also improve energy efficiency.

This airtight, vapour-permeable membrane is extremely water-resistant and can be used for all supported and unsupported pitched roofs.

**Tyvek® Supro Plus** offers the same benefits, plus an integral adhesive lap tape designed for use in the Tyvek® sealed roof system.



# DUPONT<sup>™</sup> HOUSEWRAP

Offers durable protection from moisture for walls, and is also breathable to reduce condensation.

DuPont<sup>™</sup> Tyvek<sup>®</sup> Housewrap is the ideal breathable membrane for timber frame wall systems, and is also suitable for steel frame and concrete wall construction.

It is surface-applied, and should be fixed directly to the sheathing ply/OSB, insulation or blockwork.



### **DUPONT<sup>™</sup> REFLEX**

A heat reflective membrane that helps to improve thermal efficiency by reflecting radiant heat in summer, and reducing convective heat loss in winter.

A strong, water-resistant breather membrane with a metallised surface.

It is suitable for use in any wall system that requires secondary protection from external moisture. Tyvek® Reflex is the first reflective breather membrane for thermal management.



#### **AIRGUARD® CONTROL**

Designed to reduce uncontrolled air leakage and minimise convective heat loss in roofs, walls and floors.

A continuous layer of DuPont<sup>™</sup> AirGuard<sup>®</sup> Control reduces air leakage by providing an effective vapour control barrier to control air movement and moisture infiltration around the habitable space of the building.



# AIRGUARD<sup>®</sup> REFLECTIVE

A low emissivity internal vapour barrier that combined with an airgap can enhance thermal comfort.

This 100% airtight vapour barrier is specially designed to give maximum thermal performance. Considerably reduces interstitial condensation as well as improves thermal efficiency by reflecting up to 95% of radiant heat.



#### **TYVEK® FIRECURB**

#### A fire retardant membrane for commercial and residential buildings that uses new, patented technology.

FireCurb<sup>™</sup> Housewrap is a lightweight, advanced, fire retardant membrane that self-extinguishes when ignited. It uses a halogen-free flame retardant coating to reduce the formation of droplets and smoke with minimal environmental impact.



#### TYVEK<sup>®</sup> STRUCTUREGUARD<sup>®</sup>

The original housewrap, incorporating unique material science that helps keep air and water out, while letting water vapor escape.

As a result, it can contribute to improved building durability by helping to protect homes against damaging wind and rain that can penetrate the exterior cladding.



# **AIRGUARD® SMART**

AirGuard<sup>®</sup> Smart AVCL is airtight and water resistant and adapts its vapour resistance as humidity levels change.

It helps preserve structures by allowing trapped humidity to escape during the drying-out phase – then acting as a traditional AVCL once structures are dry and moisture levels have stabilised. It also provides an effective barrier in winter.



# **TYVEK® UV FAÇADE**

Specifically designed for long-term UV and moisture protection in open and ventilated rainscreen cladding systems.

Tyvek® UV Façade is the next generation in lightweight advanced protective membranes. Tyvek® UV Façade is water resistant, vapour-permeable and windtight, and designed for long-term performance.

# Torch On Membranes are polymer modified membranes used as Bituminous Waterproofing for substructures and roofs.

Torch On Membranes are manufactured out of a mixture of bitumen and different polymers like APP (Atactic Poly Propylene) or SBS (Styrene Butadiene Styrene) to influence cold temperature performance, elongation etc. and are coated onto a dimension stable reinforcement (Polyester or Glassfibre) to influence mechanical properties like tear-strength, puncture resistance, etc.

# **Pluvitec Modified APP Waterproofing Membranes**

# ULTRATEC

**Pluvitec Ultratec** is an APP modified bituminous waterproofing membrane with a single strand composite polyester reinforcement providing very high mechanical characteristics and excellent dimensional stability.

# PLUSGUM

Pre-fabricated waterproofing membrane made of distilled bitumen and elasto-plastic polymers (APP) having a woven non woven single strand composite polyester reinforcement, which provide the membrane with high mechanical characteristics and excellent dimensional stability.

The V Versions have a fibre glass reinforcement, with excellent dimensional stability.

**The PA Versions** are self-protected on the upper face with mineral slates which reduce superficial heat absorption improving the durability of the membrane.

The Self-Protected Versions have a side selvedge of 10 cm and upon request a head selvedge of 15 cm, to improve adhesion between the sheets.

# SPECIALTEC

**Pluvitec Specialtec** is an APP modified bituminous waterproofing membrane with both composite polyester and fibreglass reinforcements providing both good mechanical characteristics and excellent dimensional stability. **Specialtec P 3mm** is the underlay in our fully Pluvitec warranty backed build up.

# COMPOSITION

PE film
Waterproofing mass
Single strand composit

- **3** Single strand composite polyester fabric
- **4** Waterproofing mass
- **5A** Polypropylene mat finish

3

**5B** Mineral finish

1

2

12

# pluvítec<sup>®</sup> inde<sub>m</sub>

# Laribit

# **EAVES PLUS** Polyester Underlay

Eaves Plus taping strip is a high performance polyester sheet designed to give permanent protection where dressing an underslating felt into an external half round gutter.

It can be used with any underslating materials (including breather membranes), any tile or slate finishes and in cold or warm roof configurations.

The use of Eaves Plus will ensure long term performance of the underslating in this location, preventing water from running behind the gutter, rotting timber fascias and rafter ends.





# LARIBIT GREEN MINERAL SHED FELT Pre-Fabricated Waterproofing Membrane

The Mineral Shed Felt – 10m is a pre-fabricated waterproofing membrane.

It is made of distilled bitumen and elasto-plastic polyolefin polymers (APP), and non-woven single strand composite polyester reinforcement, which provides the membrane with very high mechanical characteristics and dimensional stability. This waterproofing membrane can be used on sheds, garages and portable buildings.

It is easily fixed with cold adhesive or hot bitumen and only requires a single layer application when used on a shed, kennel or portable building.

Covered in coarse mineral, it gives good protection against UV rays.



# Available in a Range of Finishes:

Product	Code	Size	Pallet
Pluvitec Specialtec V 2kg/m² Underlay	510761	10m x 1m	49
Pluvitec Specialtec P4 Talc Capsheet	510756	10m x 1m	25
Pluvitec Specialtec P4 Sand Capsheet	510758	10m x 1m	25
Pluvitec Specialtec P 3mm	510755	10m x 1m	30
Pluvitec Plusgum P 4mm Talc Capsheet	510769	10m x 1m	24
Pluvitec Ultratec P 4mm Sand Capsheet	510753	10m x 1m	24
Laribit Green Mineral Shed Felt	610253	10m x 1m	39
Eaves Felt Type 5U 333mm	610402	333mm x 16m	90
Eaves Felt Type 5U 500mm	610401	500mm x 16m	60
1F Slaters Felt	610102	15m	36



# FIBRE CEMENT AND TILE BACKER BOARDS



# PERMABASE CEMENT BOARD APPLICATIONS

PermaBase® Cement Board is the ideal board for exterior render, cladding and EWI applications.

PermaBase<sup>®</sup> Cement Board is a rigid substrate made of Portland cement, aggregate and glass mesh that provides an exceptionally hard, durable surface that is able to withstand prolonged exposure to moisture.

PermaBase<sup>®</sup> offers a competitive advantage over similar products on the market with its patented EdgeTech Technology. The tapered, reinforced edge design allows for closer nail or screw application to the edge.



# A Perfect Solution for a Wide Range of Applications



# **Range of Products**

# PermaBase Cement Board

Cement Board for Both Interior and Exterior Applications


PermaBase® Cement Board is suitable for both interior and exterior applications.

overall flexural, compressive, and tensile strength characteristics.

PermaBase® Underlayment 7mm x 1.2m x 1.2m

This board is impact resistant, extremely durable and dimensionally stable. It has excellent

PermaBase® is ideally suited as an underlayment or backing surface for tub and shower surrounds,



countertops, flooring and a variety of other interior and exterior applications. It has a smoother finish than other brands and has no open edges, which reduces hand chafing.				
Product	Size	Weight (per m <sup>2</sup> )	Code	Pallet
PermaBase® Cement Board	12.5mm x 2.4m x 1.2m	14.2kg	402680	50
PermaBase® Cement Board	12.5mm x 1.5m x 0.9m	14.2kg	402682	50
PermaBase® Cement Board	12.5mm x 1.2m x 1.2m	14.2kg	402663	50

#### PermaBase Screws **Corrosion Resistant Screws**



PermaBase® Screws are corrosion resistant screws specifically designed to be used with PermaBase® Cement Boards.

They are used to attach PermaBase®

Cement Board to wood or steel

studs, plywood subfloors, ceilings

SCREWS

Product PermaBase Screws for Metal 100 Pack PermaBase Screws for Wood 100 Pack

Code Head Diameter Colour Box 402668 0.45" (11.4mm) Silver 40 402697 0.45" (11.4mm) Silver 40

and countertops.

# PermaBase Tape Alkali Resistant Fiberglass Tape

8.9kg



PermaBase® Tape is an alkali resistant fiberglass tape. The tape is especially designed

402681

60

to reinforce PermaBase® Cement Board joints and corners.

Product	Code	Size	Colour	Box
PermaBase Joint Tape	402696	75mm x 46m	Grey	12

# X-TREME Tile Backer Board

#### Tile Backer Board for Interior Applications



X-TREME Tile Backer Board is a better environmental alternative and upgrade to replace gypsum and plywood products for walls, floors and counter tops.

These products are typically used in wet areas as a tiling underlayment where they are extremely prone to deterioration or delamination should moisture penetrate through a crack in the wall or floor. When installed in accordance with the X-TREME Tile Backer Board installation instructions this should not happen.



# JOINT COMPOUNDS

# ALL PURPOSE BLACK LID All Purpose Joint Compound



ProForm® BRAND All Purpose Joint Compound is a vinyl base ready mix joint compound for the professional that may be used directly from the container. All Purpose Joint Compound is designed for tape application, fastener spotting and complete joint finishing of gypsum board. It can also be used to repair cracks in plastered walls, to texture surfaces and to laminate gypsum board to other surfaces.

# LITE BLUE LID Lightweight Joint Compound



Interior Finishing Products

ProForm® BRAND Lite Blue Joint Compound helps you get an easy, professional finish. So after you apply ProForm® BRAND Lite Blue and your final skim coat, you'll have a smooth and consistent surface, ready for priming and painting. ProForm® BRAND Lite-Blue Joint Compound is a vinyl base ready mix lightweight joint compound.



**MULTI-USE RED LID** 

Pro**Form** 

ssional Formula

MULTI-USE

Michweight Joint Compound

Multi-Use Joint Compound



ProForm<sup>®</sup> BRAND Quick Set<sup>™</sup> Lite Setting Compound is a quick setting/hardening type joint compound that is 30% lighter than conventional setting compound, can be easily sanded and requires less time and effort to work.

ProForm<sup>®</sup> BRAND Multi-Use

is a vinyl base ready mix joint compound formulated especially

It may be used directly from

Compound is designed for tape

ProForm Multi-Use Joint

and finishers.

the container.

for professional drywall contractors

Product	Code	Size	Colour	Pallet
All Purpose Black Lid	402802	5.4kg	White	4/box
Multi-Use Red Lid	402801	17L	White	45
Lite Blue Lid	402800	17L	White	45
Quick Set Lite Sand	402686	8.2kg	White	120
ProForm Paper Joint Tape	402691	50m x 75mm	White	20/box
ProForm Paper Joint Tape	402692	50m x 150mm	White	10/box

• Ideal for taping, filling, finishing and texturing



# A range of oxide paints used for all structural steel surfaces, farm buildings, hay barns, sheds, corrugated iron roofs and other metal structures.

With an extremely advanced durability, the lead free SYN-OXIDE paint acts as an outstanding weather shield, offering protection against external factors, and at the same time enhances the appearance of the farmyard. SYN-OXIDE is an easy-to-apply paint, needs minimum preparation, and assures effective results.

- True reliability For use on both bare and galvanised metal
- Exceptional covering power 1 litre will cover up to 13 square meters
- **Proven efficiency** On all plain or corrugated iron surfaces
- Weather shield High an i-corrosive proper ies

OXID

1).11

SYA

51

OXIDE

- Commitment to a healthier environment Lead-free oxide paint
- Simple choice All the 5 classic colours are available

Product	Code	Size	Palle
RED Syn-Oxide	SYNOXIDE-RED-1	1L	720
RED Syn-Oxide	SYNOXIDE-RED-2.5	2.5L	256
RED Syn-Oxide	SYNOXIDE-RED-5	5L	120
RED Syn-Oxide	SYNOXIDE-RED-20	20L	24
LIGHT GREEN Syn-Oxide	SYNOXIDE-GRN-1	1L	720
LIGHT GREEN Syn-Oxide	SYNOXIDE-GRN-2.5	2.5L	256
LIGHT GREEN Syn-Oxide	SYNOXIDE-GRN-5	5L	120
LIGHT GREEN Syn-Oxide	SYNOXIDE-GRN-20	20L	24
DARK GREEN Syn-Oxide	SYNOXIDE-DG-1	1L	720
DARK GREEN Syn-Oxide	SYNOXIDE-DG-2.5	2.5L	256
DARK GREEN Syn-Oxide	SYNOXIDE-DG-5	5L	120
DARK GREEN Syn-Oxide	SYNOXIDE-DG-20	20L	24
GREY Syn-Oxide	SYNOXIDE-GRY-1	1L	720
GREY Syn-Oxide	SYNOXIDE-GRY-2.5	2.5L	256
GREY Syn-Oxide	SYNOXIDE-GRY-5	5L	120
GREY Syn-Oxide	SYNOXIDE-GRY-20	20L	24
BLACK Syn-Oxide	SYNOXIDE-BLK-1	1L	720
BLACK Syn-Oxide	SYNOXIDE-BLK-2.5	2.5L	256
BLACK Syn-Oxide	SYNOXIDE-BLK-5	5L	120
BLACK Syn-Oxide	SYNOXIDE-BLK-20	20L	24



**SYN-OXIDE** Oxide Paint

11111

OXIDE

# **RADON AND GAS PROTECTION SYSTEM**

VISQUEEN BUILDING PRODUCTS

<u>RADE)</u> 3000

# MEMTECH M1 6-Layer Gas Barrier

Memtech M1 is a 6-layer product with base layer LDPE film, PP reinforcement scrim, LDPE coating, co-polymer adhesive, aluminium foil and top coating of LDPE.

Memtech M1 is black in colour on the top side and white on the bottom side, which will aid in the verification process as damage is highlighted from the white underside to the black upper finish.

# MEMTECH R1 Reinforced Radon Barrier

Memtech R1 Radon Barrier is a low-density polyethylene membrane reinforced with a polypropylene reinforcing grid. It provides an effective barrier to the passage of liquid water and water vapour from the ground, as well as resistance to underground gases — Memtech R1 is capable of restricting the ingress of radon, methane and carbon dioxide gases into the building.

It has a high resistance to puncture.

#### LAYDEX RADON POLYSUMP Roto-Moduled PVC Unit



The Laydex Radon Sump is a high quality roto-modulated PVC unit which is lightweight, durable and easily installed. The outlet positions are easily cut on-site to allow vent pipes to be attached for extraction, and dispersion, of radon in the atmosphere.

#### LAYDEX TOP HAT Pre-Formed Section



A Pre-Formed Section that provides a safe and strong sealed connection around pipe penetrations in a radon barrier membrane. It helps complete a radon barrier system that prevents the ingress of harmful radon gases to protect your health.

# NSAI #MEMTECH JUTA

#### JUTA GP<sup>®</sup> PRIMER Quick Drying Primer



JUTA GP<sup>®</sup> Quick Drying Primer is a cold applied bituminous solution designed to penetrate and seal porous surfaces prior to the application of covering materials.

Conforms to BS Code of Practice 144, Part 3.

#### JUTA GP<sup>®</sup> LIQUID GAS BARRIER Specialist Styrene Butadiene Latex



A ready for use specialist styrene butadiene latex based liquid applied membrane.

It offers a simple, continuous passive gas prevention barrier against the ingress of Methane, Carbon Dioxide, Radon, Ground Gas, VOC, air & Moisture into buildings.

# **JUTA GR SAM** Gas Resistant - Self-Adhesive Membrane



A bituminous gas proof and water proof sheet, composed of self-adhesive SBS polymer modified bitumen with an upper surface finish of aluminium foil, and a lower surface finish of siliconized polypropylene release film

Used for the waterproofing of underground structures where harmful ground gasses are anticipated.

# GAS RESISTANT DPC Durable Gas Resistant Damp Proof Course



The DPC in this range is produced with high quality materials, and is suitable for all residential and industrial building projects.


#### VISQUEEN / RADEX 3000 Non-Reinforced Radon Barrier



Visqueen/Radex 3000 Radon Membrane is manufactured from an enhanced blend of polymer films that is suitable for use in the protection of buildings from the ingress of radon gas.

Visqueen/Radex 3000 Radon Membrane also acts as a damp proof membrane, but is not intended for use where there is the risk of hydrostatic pressure.

#### RADEX RADON TAPE Air, Dust and Water Seal



Radex Radon Tape can be used for sealing membranes such as Radon.

It is easy and accurate to use with little waste and no mess.

NSAL





# GAS AND HYDROCARBON BARRIER PROTECTION SYSTEM



# The New TITAN Strong GP Range by JUTA

# **GP® TITANFLEX GP® TITANTANK**

Code

GPTITAN2X50

JUTA GP-TITAN

JUTA GP-TITAN 1.9

#### High-Performance Multifuncional Membrane

GP® TITANFLEX Ground Gas and Hydrocarbon Membranes are high performance, multi-functional membranes that provide protection from ground gases including VOCs, carbon dioxide, methane, radon, hydrocarbons and protects the structure from water ingress.

GP® TITANFLEX membranes are extensively tested and proven to withstand the most aggressive environments.

Gas and Hydrocarbon Membrane

Product

**GP® TITANFLEX** 

**GP® TITANTANK** 

Self-Adhesive Membrane GP® TITABOND

Pre-Applied Membrane

# Self-Adhesive Version of the GP® Titanflex

GP® TITANTANK: A Self-Adhesive version of the GP® TITANFLEX; composed of self-adhesive with an upper finish of GP® TITANFLEX and a lower surface finish of siliconized polypropylene release film.

GP® TITANTANK is used for the Gas/ Waterproofing/Tanking of underground structures where harmful ground gases bare anticipated, as a post-applied fully bonded membrane.

Colour

Black

Black

Black

Pallet

14

14

24

Size

2m x 50m

2m x 50m

1.9m x 25m

# **GP® TITANBOND**

#### Pre-Applied Fully Bonded Waterproofing Membrane

GP<sup>®</sup> TITANBOND: A Pre-Applied Fully Bonded Waterproofing Membrane incorporating the GP<sup>®</sup> TITANFLEX membrane and a heavy duty virgin polypropylene geotextile to provide a dual function. Ensuring a fully bonded waterproofing barriers which has exceptionally high resistance to ground gas and VOCs.

GP® TITANBOND is used for the Gas/ Waterproofing/Tanking of underground structures where harmful ground gases are anticipated.



# **CONSTRUCTION FILMS AND DAMP PROOFING**

#### POLYTHENE DAMP PROOF MEMBRANE Suitable For a Wide Variety of Construction Applications

We stock a wide range of polythene Damp Proof Memebrane (DPM) materials suitable for a wide variety of construction applications. All DPMs have exceptional tear resistance and tensile strength.

#### DAMP PROOF COURSE Suitable For All Low Rise Domestic Constructions

The DPC in this range is produced with high quality materials, and it's suitable for all low rise construction projects. It is a durable membrane that offers a great mortar adhesion, and it's available in a range of sizes.





Product	Code	Colour	Size	Pallet
DPC				
DPC 100mm (9 rolls)	IRLDPC100	Black	22.5m <sup>2</sup>	64
DPC 150mm (6 rolls)	IRLDPC150	Black	22.5m <sup>2</sup>	64
DPC 225mm (4 rolls)	IRLDPC225	Black	22.5m <sup>2</sup>	64
DPC 300mm (3 rolls)	IRLDPC300	Black	22.5m <sup>2</sup>	64
DPC 337.5mm (3 rolls)	IRLDPC337.5	Black	25.31m²	64
DPC 375mm (2 rolls)	IRLDPC375	Black	18.75m <sup>2</sup>	64
DPC 450mm (2 rolls)	IRLDPC450	Black	22.5m <sup>2</sup>	64
DPC 600mm (2 rolls)	IRLDPC600	Black	30m <sup>2</sup>	64
DPC 900mm (1 roll)	IRLDPC900	Black	22.5m <sup>2</sup>	64
DPC/DPM				
1000G	701142	Black	15 x 3.5m	103
1000G	701159	Clear	15 x 3.5m	28
1200G	701139	Black	15 x 3.5m	75
2000G	701152	Black	15 x 3.5m	28
Heavy Gauge Clear	701162	Clear	15 x 3.5m	100
Heavy Gauge Grey	701163	Grey	15 x 3.5m	100

# **ARTIFICIAL GRASS**









FO FRIENDL



SAGE Artificial Grass feels like natural grass.

With it's 35mm pile, SAGE is extremely durable, requires minimal maintenance and will withstand all weather conditions. Transform your space with SAGE!

# Perfect Grass Whatever the Weather



Product	Code	Size	Box
SAGE Grass	730061	2m x 25m	-
AstroPro Adhesive	BDAPROGN	EU3	12
Astro Pro Seaming Tape	BDAST200	200mm x 100m	1

Artificial Grass Adhesive and Sealing Tape More info on page 33

# **FLOOR PROTECTION SHEETS**

# **CORRIBOARD** FLOOR PROTECTION SHEETS

Manufactured as an extruded polypropylene sheet, Corriboard is the original fluted protection board used on building and refurbishment contracts.

Available in a wide range of weights, grades and custom sizes.

Used to PROTECT
Doors, Walls, Stairs,
Floors, Partitions,
Windows, Bathrooms,
Columns & Much More

Thickness	Colour	Code
2.1mm	White	820800
2.1mm	Black	820801
4.0mm	Black	820804
6.0mm	Black	820805
9.2mm	Black	820806



BUILDING PRODUCTS | ARTIFICIAL GRASS - Sage

# A STUNNING RANGE OF RESIDENTIAL INTERIOR DOOR HANDLES

# F) Fortessa

- Ē All products undergo thorough testing at all stages of manufacture.
- Ð All Levers must comply to strict quality examinations.
- ) (E) (E) Each Lever is assessed for its resistance to corrosion and scratches.
- Performance of all working parts is rigorously tested.
- Ē All levers meet DIN EN 1906 Interior Residential classification standards.
- And finally, before dispatch, all collections are carefully checked by eye Æ to ensure their perfection.





# GOTHAM

AN EXCLUSIVE RANGE BY FORTESSA IN GOTHAM GREY FINISH



Door Handle	Code
Achilles AB	FDEACH-AB * **
Achilles SN	FDPACC-SN * **
Wave SN	FCOWAV-SN * **
Olympia SN/CP	FCOOLY-SN/CP
Sorrento SPC	FCOSOR-SPC
Amalfi SPC	FCOAMA-SPC * **
Verto PC	FCOVER-PC
Swish SN	FCOSWI-SN * **
Apollo SN/NP	FDEAPO-SN/NP
Maya SN/NP	FDEMAY-SN/NP * **
Versailles SB	FCOVERSBS-SB * **
Versailles SC	FCOVERSBS-SC * **
Versailles AB	FCOVERSBS-AB * **
Magneto	FGOMAG-GMG * **
Vader	FGOVAD-GMG * **
Mystique	FGOMYS-GMG * **
Rogue	FGOROG-GMG * **
Spectre	FGOSPE-GMG * **
Vulcan	FGOVUL-GMG * **
Phantom	FGOPHA-GMG * **
Taranis	FGOTAR-GMG * **

\*Also available as Box Set \*\*Also available as WC Box Set

# **COMPOSITE DECKING AND RAILING**




Historically people have automatically turned to timber decking – now we choose Teranna! Teranna Composite Decking is a great alternative to timber decking. It will withstand all types of harsh weather conditions and will create a comfortable, attractive external living space.

Teranna Composite Decking requires minimal maintenance. It's also splinter-free so relax, kick off your shoes and enjoy! It is environmentally friendly and has the perfect balance of quality and sustainability.

- Full resistance to corrosion, moulds and fungi
- Requires minimal maintenance
  no need for painting, staining or sealing
- Slip-Resistant and produced to BS Standard 7976 Part II,
- Resistant to UV rays and Fire Rated
- Resistant to low and high temperatures
- Suitable for all weather conditions


Ever-Shield 140mm Weight: 3.13kg/m Length: 3.6m Ever-Deck 135mm



# EVER-DECK

- REVERSIBLE deck boards allow the option of two finishes, making creative deck patterns easy to achieve
  - Available in 3 standard colours that will cater for all tastes and will create an attractive external living space in your home
  - Boasts excellent safety characteristics most notably it's excellent anti-slip ratings
  - Comes with double sided grooves and has a very wide range of applications ranging from small balconies and verandas; through to the decks of family homes and large commercial projects such as swimming pools and recreational areas

24



0

- Slip-resistant, easy to install, reliable, and safe, TERANNA creates outdoor settings where people love to spend time
- The Ever-Shield range protective shield looks and feels like natural wood



	PRODUCT	DESCRIPTION	CODE	SIZE	PALLET
		DARK BROWN	FS-DEK-023DB	3.6m x 135mm	40
	DECKING BOARDS	GRAPHITE	FS-DEK-023GRA	3.6m x 135mm	40
S	DOARDS	LIGHT BROWN	FS-DEK-023LB	3.6m x 135mm	40
EVER-DECK		DARK BROWN	ACC-07DB	2.2m	40
ER-	WPC SEALED STRIP	GRAPHITE	ACC-07GRA	2.2m	40
	JEALED STRIP	LIGHT BROWN	ACC-07LB	2.2m	40
		10m <sup>2</sup> x 3mm	KK-03-10	-	10
	GAP KITS	2m² x 3mm	KK-04-2	-	10
		WALNUT	FS-DEK-C01WLN	3.6m x 140mm	40
_	DECKING BOARDS	SILVER GREY	FS-DEK-C01LG	3.6m x 140mm	40
		TEAK	FS-DEK-C01TK	3.6m x 140mm	40
	ALU SEALED STRIP	WALNUT	ACC-C01WLN	2.2m	40
R-S		SILVER GREY	ACC-C01LG	2.2m	40
ЧE С		TEAK	ACC-C01TK	2.2m	40
		10m <sup>2</sup> x 3mm	KK-C01-10	-	10
	GAP KITS	2m² x 3mm	KK-C01-2	-	10
	HOLLOW JOIST	50 x 30 x 3600mm	ACC.02AB	50 x 30 x 3600mm	40
	STARTING CLIPS	Pack of 30	KK-05-10	-	10
ט		DARK BROWN	NRL-02-DC	1.5m long	5
RAILING	RAILING KITS	GRAPHITE	NRL-02-AB	1.5m long	5
		DARK BROWN	NRL-01-DC	0.12m x 1.1m	5
2	POST KITS	GRAPHITE	NRL-01-AB	0.12m x 1.1m	5



EVER-JHIELD







25

# **DECORATIVE STONE CLADDING**

#### Decorative stone adds individual character to any interior or exterior.

When applied to a single external wall or some interior and exterior areas, it enriches them with a natural atmosphere. The tiles are made with great care and attention to detail.



Wide range of products offering various colours, shapes and textures will enable you to create an unprecedented play of light and shadow in any room and will complement the style of the interior, as well as the space around your house.





Product	Code	Size	Pallet
Palermo 1 - White Tile	402715	0.62 m <sup>2</sup> /box	40
Palermo 1 - White Corner	402716	1.13 lin.m/box	40
California 1 - Desert Tile	402709	0.50 m <sup>2</sup> /box	63
California 1 - Desert Corner	402710	0.90 lin.m/ box	40
Creta 1 - Cream Tile	402701	1.00 m <sup>2</sup> /box	42
Creta 1 - Cream Corner	402702	2.00 lin.m/box	40
Mexicana 3 - Graphite Tile	402713	0.50 m <sup>2</sup> /box	49
Mexicana 3 - Graphite Corner	402714	1.00 lin.m/box	40
Grenada 2 - Frost Tile	402711	0.32 m <sup>2</sup> /box	80
Grenada 2 - Frost Corner	402712	0.58 lin.m/box	40
Grenada 1 - Russet Tile	402723	0.32 m <sup>2</sup> /box	80
Grenada 1 - Russet Corner	402724	0.58 lin.m/box	40
Venezia 4 - Graphite Tile	402705	0.50 m <sup>2</sup> /box	72
Venezia 4 - Graphite Corner	402706	1.06 lin.m/box	40
Metro 2 Graphite Tile	402760	0.63 m <sup>2</sup> /box	48
Metro 2 Graphite Corner	402761	1.02 lin.m/box	40
Rustik 540 Tile	402758	1.00 m <sup>2</sup> /box	45
Rustik 540 Corner	402759	2.00 lin.m/box	40
Coutry 668 Tile	402721	1.00 m <sup>2</sup> /box	55
Coutry 668 Corner	402722	1.80 lin.m/box	40
Vintage - Beige Tile	402763	0.49 m <sup>2</sup> /box	60
Vintage - Beige Corner	402764	0.93 lin.m/box	40
Timber 1 - Wood Tile	402762	0.43 m <sup>2</sup> /box	70









EXTERIOR INTERIOR

GRENADA 1 - RUSSET





EXTERIOR

Y

INTERIOR





METRO 3 - GRAPHITE



INTERIOR

VENEZIA 4 - GRAPHITE



**VINTAGE - BEIGE** 

CRETA 1 - CREAM

# **ADHESIVES**

# **CONSTRUCTION ADHESIVES**

### BOND IT SAVES NAILS Instant Grab Adhesive

Non-slumping, multi-purpose building adhesive with gap-filling properties.



Application: suitable for use on most common
building materials including brick, ceramics,
glass, metals, plaster, plastics, wood and stone.
Replaces mechanical fixings in a variety of
applications.

Saves Nails has a toluene free formulation and can used on **interior** or **exterior** projects. It will bridge gaps of up to 12mm.

Code	Size	Colour	Вох
BDSN2	EU3	Beige	25

# BOND IT ECO EXTREME SOLVENT-FREE Solvent-Free Adhesive

An environmentally friendly, advanced technology formula offering instant grab and tough permanent bond on virtually any porous or non-porous surfaces. Eco Extreme is a low odour, >99% VOC free, water clean-up construction adhesive. Cures to form a high strength bond. Contains no harmful raw materials.



Application: ECO XTREME is ideal for adhering panelling, plasterboard, cove base, window sills, styrofoam, carpet tack strips, aluminium furring strips, tub surrounds, fireplaces, loose floor/wall tiles, plywood, aluminium, steel, wood, concrete, cork, general repairs to wood, fixing hardboard and plywood and as a general adhesive.

Code	Size
BDEX350	350ml

**Colour** White

Box

12

# BOND IT SAVES NAILS SF Solvent-Free Grab Adhesive

Saves Nails in a solvent-free formula, having less impact on the environment, low odour and which can be cleaned up with water.



Application: instant grab and a tough permanent bond on virtually any surface. Extremely low VOC content, no harmful raw materials and ideal for fixing panelling, plasterboard, cove base, window sills, styrofoam, carpet tack strips, aluminium furring strips, tub surrounds, fireplaces, loose floor/wall tiles, aluminium, steel, wood, concrete, cork and as a general adhesive.

Recommended for internal use only.

Code	Size	Colour	Box
BDPGE	EU3	White	25
BDSQSN2	EU2	White	12

# **BOND IT GRIPBOND WHITE** Solvent-Free Adhesive

A premium, environmentally friendly, multi-purpose gap-filling adhesive. Water based, completely solvent-free and with excellent quick grab properties.



Application: perfect for fixing battens, cladding, countertops, drywall partitioning, mouldings, dado rails, mirror tiles, trims and wall boards. Cures to give a tough, durable and permanent bond and can replace or augment mechanical fixings when bonding brick, building panels, carpet, concrete, coving, floor panels, marble, metal, tiles, timber and polystyrene.

Gripbond White is for **interior** use only.

Code	Size	Colour	Box
BDGBSF	350ml	White	12

### BOND IT GRIPBOND Construction Adhesive

A multi-purpose, solvent-based instant grab adhesive to replace mechanical fixings in a variety of applications. Fast bonding, gap-filling and non-slumping.

**Application:** ideal for fixing a wide range of materials such as skirting boards, door surrounds, window frames, window sills, cladding, wall battens, metal carpet edges and much more.

Suitable for all weather conditions, it can be applied to uneven, rough and porous substrates and can be over-painted once dry.

Gripbond can be used on interior and exterior projects and will bridge gaps up to 12mm.

Size Colour 350ml Beige

olour Box

Code

BDGBBR

# **CONTACT ADHESIVES**

# BOND IT CONTACT ADHESIVE

#### Neoprene Glue

A premium grade, solvent-based, neoprene adhesive with high grab and long open time to enable re-positioning. 250ml, 500ml and 1L versions are toluene-free.



**Application:** ideal for bonding cork, leather, rubber, metals, wood, chipboard, hardboard, laminated plastics (e.g. formica), dense textiles, plaster, stone, concrete and smoothing compounds. Will bond PVC and uPVC sheets but material should be checked for suitability as plasticiser migration can occur in some instances.

Designed for interior use, but can be used for bonding vertical surfaces and ceilings.

Contact Adhesive can be used **externally** when the adhesive is protected from direct sunlight and water. Unsuitable for polystyrene, polythene, polypropylene, silicone rubber, bitumen and PTFE. 250ml pack supplied with application brush.

Code	Size	Colour	Box
BDA004	250ml	Beige	12
BDA001	500ml	Beige	12
BDA002	1L	Beige	12
BDA003L	5L	Beige	1

# **FLOORING ADHESIVES**

#### **BOND IT FLOORBOND MPA** Multi-Purpose Acrylic Adhesive



#### A multi-purpose acrylic adhesive for bonding most vinyls and carpets.

Application: MPA is solventfree, non staining, has excellent plasticiser migration resistance and is suitable for use over most underfloor heating systems. Coverage is approximately 3-4.3m2/kg.

CodeSizeColourPalletBDMPA1515kgCream33

# BOND IT FLOORBOND PSA

Pressure Sensitive Adhesive



A pressure sensitive adhesive for use with the majority of vinyl floor covering and PVC backed carpets.

Application: with excellent plasticiser migration resistance, PSA is non staining, solvent-free and provides a high coverage, pressure sensitive acrylic covering which is suitable for use over most underfloor heating systems. Coverage is approximately 3.5-7.6m2/kg.

Code	Size	Colour	Pallet
BDPSA15	15kg	Cream	33

#### **BOND IT FLOORBOND CTT** Carpet Tile Tackifier

A solvent-free acrylic emulsion providing a permanently tacky film or the removable fixing of "loose lay" carpet tiles. This enables tiles to be easily lifted and replaced when required.



Application: It can be applied to most common substrates, smoothing compounds and metal access floor panels. CTT may also be used over existing well bonded resilient floor coverings provided they are thoroughly cleaned of any wax, polish or other contaminants. Coverage is approximately 6-7m2/kg.

Code	Size	Colour	Box
BDCTT5	5kg	White	4
BDCTT25	25kg	White	1

# Check out Wood Adhesives on pages 34 and 35



# **HYBRID ADHESIVES**

#### **BOND IT GRIPBOND PRO** Premium Adhesive & Sealant

A one-part, high quality, high modulus sealing and bonding material. Forms a tough, elastic rubber joint or an adhesive with superior bonding strength.



Application: for filling and sealing connecting joints, cracks, holes, bonding metal to metal and as a waterproof adhesive for bonding concrete, mirrors, gypsum board, polycarbonates, polystyrene, uPVC, many plastics, ceramics, copper, lead, zinc, aluminium, stainless steel, wood and glass. For **internal** and **external** use.

Code	Size	Colour	Box
BDMSPWH	EU3	White	12
BDMSPCL	EU3	Clear	12
BDMSPBL	EU3	Black	12
BDMSPGR	EU3	Grey	12

# **BOND IT THE ONE** Premium Grade Universal Silicone

A quick drying, low modulus, neutral cure (LMN) sealant designed to be the absolute state of the art in silicones.



Application: The One will not react with natural stone or bleed into porous stone. It contains a powerful fungicide to prevent mould growth and is suitable for most everyday sealing applications including sanitary use (shower in 1 hour), window frames, ducting and high temperature locations (up to 2200C).

It is ideal for use on metals, mirrors, natural stone, granite, travertine, marble, uPVC, concrete, plaster and VSG/LSG glass (laminated safety glass).

For **internal** and **external** use. Contains fungicide. **CE approved.** 



e Colour Box ml White 12 ml Translucent 12

# BOND IT GRIPBOND PRO MAX Maximum Strength Adhesive


The ultimate grab adhesive for a longer lasting bond. Gripbond Pro Max typically has double the initial grab of other adhesives and is rapid curing, eliminating the need for mechanical support in most common applications.



Application: superb adhesion qualities even on wet surfaces, Gripbond Pro Max is suitable for use in all weather conditions. Quick curing, isocyanate, solvent and acid-free, it is ideal for use with metal, wood, glass, stone, insulation board ceramics, many plastics, perspex, polyester, MDF, chipboard, OSB and timber panels. For **interior** and **exterior** use.

Gripbond Pro Max can be over-painted, applied to wet surfaces and has a typical bond strength of 250kg/m2.

Code	Size	Colour	Box
BDPPROWH	White	EU3	12

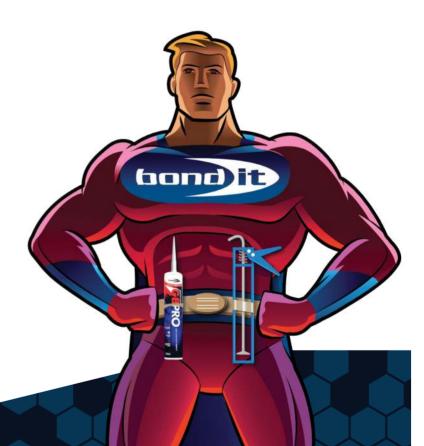

# PRORANGE

PROFESSIONAL PRODUCTS MADE BY PERFECTIONISTS USED BY CRAFTSMEN

# INDUSTRIAL AND SUPER GLUES

# BONDIT SUPER GLUE ACTIVATOR

#### Adhesive Activator

Speeds up the rate of cure for cyanoacrylate adhesives.



Application: ideal for situations where an instant bond is required, e.g. mitres in carpentry or the rapid assembly of components in the electronics industry. Suitable for bonding wood, MDF, rubber, uPVC, metals and most plastics, Super Glue Activator is easy to use and leaves no mess.

Not suitable for use on uPVC when moisture is present in the atmosphere or the uPVC is damp as this can cause discolouration in the surface of the uPVC.

Code	Size	Colour	Box
BIC200	200ml	Clear	12
BIC400	400ml	Clear	12

### **BOND IT MITRE KIT ADHESIVE** Adhesive and Accelerator Twin Pack

High strength bonding system comprising of a cyanoacrylate adhesive with an aerosol activator to ensure full and rapid curing on acid surfaces.



**Application**: use for bonding wood, MDF, rubber and most plastics. Instant bonding properties (cures in approximately 10 seconds) considerably reduce assembly times for mitre joints where precision bonding is required.

Pack contains 1 tin of activator (200ml) and 1 bottle of HVC superglue (50g). Also available in smaller size BDMI100 (100ml and 20g).

Code	Size	Colour	Box
BDMI	200ml+50g	Clear	12
BDMI100	100ml+20g	Clear	18

#### **BOND IT A43 THREADLOCK** Medium Viscosity Compound



Medium strength screw and thread locker for direct application to lightly oiled components.

Application: replaces spring washers

and lock nuts whilst allowing for disassembly using the correct tools. A43 Threadlock will prevent rust

and corrosion and has a non-drip consistency for clean, economic use.

Code	Size	Colour	Box
BIA4325	25ml	Blue	15
BIA4350	50ml	Blue	15

# BOND IT A70 STUDLOCK High Strength Adhesive



High strength, anaerobic adhesive for permanent retention and sealing of threaded fasteners, sleeves and bearings.

Application: resistant to fuels, oils, hydraulic and refrigeration fluids. A70 Studlock also acts as a lubricant during assembly to ensure accurate torquing and protection against corrosion.

Code	Size	Colour	Box
BIA7025	25ml	Green	15
BIA7050	50ml	Green	15

# BOND IT HVC CYANOACRYLATE GLUE High Viscosity Adhesive

Cyanoacrylate adhesive developed for bonding porous surfaces, rubber and plastics including uPVC.



Application: with gap-filling properties, HVC Superglue is ideal for bonding Trims and caps on uPVC windows as well as rubber, wood, metal, ceramics, MDF, leather, porcelain and card. Average set time between 10-30 seconds.

Performance can be improved via use of Bond It Super Glue Activator.

Code	Size	Colour	Box
HVC1620	20g	Clear	25
HVC1650	50g	Clear	20

# BOND IT RGC CYANOACRYLATE GLUE Medium Viscosity Adhesive

Fast setting, economical cyanoacrylate adhesive which will fill gaps to 0.1mm.



Application: suitable for close fit, nonporous substrates, e.g. most plastics, metals, glass, uPVC, rubber and EPDM. Supplied in a handy self-merchandising display box, the average set time is between 5-15 seconds.

Performance can be improved via use of Bond It Super Glue Activator.

Code	Size	Colour	Box
RGC2420	20g	Clear	25
RGC2450	50g	Clear	20

# BOND IT SPRAY LUBRICANT

Solvent and Oil Blend

Low viscosity aerosol with excellent penetrating properties.



Application: this high performance fluid is suitable for all applications where a de-watering, anti-corrosive and general lubrication product is required. Simply spray to deeply penetrate and aid dismantling of rusted parts and fasteners in locks, hinges and tools.

Spray Lubricant will help protect tools and metals from rusting and can be used as a starting aid for damp ignition systems, etc.

Colour

Box

12

iing silve	Code	Size	Colou
4	BIMP400	400ml	Clear

# **POLYURETHANE ADHESIVES**

#### **BOND IT MEGA STIK** Fast Cure Adhesive Foam



Low expansion adhesive foam developed for the rapid installation of plasterboard, insulation boards, floor boards and roof decking.

Application: for fixing wall panels, skirting boards, roof tiles, decking and thermal insulation. No mixing, no mess, no water and no dust.

No need to carry heavy bags of plaster, Mega Stik does the job with a 30% time saving over conventional drywall adhesives with no need for nails or screws. Can be applied horizontally or vertically. Cured foam can be plastered over in just one hour.

Suitable for internal and external use.

Code	Size	Colour	Box
BDEF750	750ml	Beige	12

# BOND IT PU:05 AND PU:30 Moisture Cure Wood Glues

Liquid and gel formulated adhesives which are seawater proof and resistant to acids and chemicals

For interior and exterior use, the gel formulation (PU:05) is translucent and has a 5 minute open time whilst the liquid formulation (PU:30) is brown and as a 30 minute open time.

Both glues are solvent-free.

Application: use in joinery and carpentry, bonding garden furniture, staircases, boats, sandwich panels, insulation materials and general wooden structures.

Good flexibility and resistant to water and frost with excellent adhesion to porous substrates including wood, chipboard, laminate, metal, polyurethane, expanded and extruded polystyrene foams, mineral wool, stone, concrete, brick and gypsum boards.

Code	Size	Colour	Box
BDAPU5	300ml	Translucent	12
BDAPU375	750ml	Brown	16

# BOND IT SILICONE RELEASE

#### Low Toxicity Sprav

Multi-use silicone spray - clean, low toxicity and lubricating.



Application: spray in a variety of applications to ease friction between surfaces and eliminate squeaks and rattles. Ideal for the automotive, engineering, food, clothing and upholstery industries where a clean spray is most desirable. Also in projects such as mould making, mould releasing, window and door frame installations, using rubber and EPDM gaskets and general jobs around the home, garage and workshop. This aerosol contains a special valve to restrict flammability.

Code	Size	Colour	Box
BISR500	500ml	Clear	12



# SPECIALIST ADHESIVES

#### BOND IT ANCHOR BOND **Chemical Anchoring System**

A Polvester resin, single pack, rapid cure fixing adhesive - a 2-part system applied in one single action.



Application: suitable for setting bolts, studs, wall ties, starter bars or large screws, etc. into a wide range of substrates. Anchor Bond makes the fixing an integral part of the substrate, spreading the load through the entire fixing area. Use on railings, satellite dishes, fire surrounds, gates, pipes and lamps. Full cure is obtained after 2 hours. 310ml pack fits BDCG300 gun, 380mm pack

fits BDABG3 gun.

Code	Size	Colour	Box
BDAB310	310ml	Grey	10
BDAB380	380ml	Grey	12
BDABG3 Gun	380ml	Blue	1

# BOND IT AEROSOL SPRAY ADHESIVE Strong DCM-Free Aerosol

Non chlorinated, exceptionally strong, multi-purpose adhesive in a can.



Application: perfect for perimeter bonding of carpet tiles and minor flooring installations. Ideal for use in the furniture and automotive industries, especially for bonding foam to a variety of surfaces, and in circumstances where a non-structural but high strength bond is required.

Use on wood, concrete, stone, tiles, rubber, foam, metals, rigid plastics, polyethylene, canvas fabrics, cardboard, paper and cork. For interior and exterior projects.

Code	Size	Colour	Box
BDA007	500ml	Beige	12

# **BOND IT ASTRO PRO**

#### Artificial Grass Adhesive Seaming Tape

A laminated geotextile seaming tape for jointing artificial grass carpets.



Strong, rot resistant and impervious to moisture. Astro Pro Seaming Tape consists of two plies of non-woven fabric bonded together with a strong adhesive. The back layer is smooth and waterproof whilst the surface face has a more open structure to aid bonding.

Code BDAST200



Size

Colour Box 1

# **BOND IT ASTRO PRO**

# Artificial Grass Adhesive

A tought, elastic hybrid seaming adhesive for the installation of artificial grass surfaces.



Application: a superior adhesive suitable for use inside and out, in all weather conditions. Has excellent bonding properties even on wet surfaces.

Rapid cure time even at low temperatures. Remains fully elastic. Simple application; Ideal for maintenance and repair work.

Code	Size	Colour	Box
BDAPROGN	EU3	Green	12



# WOOD ADHESIVES

#### BOND IT FLOORBOND TS550 Wood Flooring Adhesive

Universal Flexible Wood Floor Adhesive permanently flexible, one part and ready-to-use, this is a moisture cure **internal** flooring adhesive. Based on hybrid technology, this formulation is free from silicone, solvents, isocyanates and water.



Application: ideal for internal bonding of parquet, mosaic, oak, wood block, laminates, exotic timber and many other wood floor types to porous or non-porous substrates including; screeds, chipboard, plywood, concrete and anhydrite.

Use with gun BD600SG. TS550 is also compatible with substrates incorporating underfloor heating systems

underfloor heating systems and has gap-filling and acoustic properties.

Code	Size	Colour	Box
BDTS55	Beige	10L	1
BDTS556	Beige	600ml	12
BD600SG	Sausage Gun	600ml	1

# **BOND IT LX16 WOOD ADHESIVE** Heavy Duty Interior Adhesive

A solvent-based, heavy duty, interior adhesive for bonding all types of wood flooring. Ideal for use where the nature of the wood flooring makes it particularly prone to warping when bonded with waterborne adhesive. Easy to spread with a high



shear strength and short open time.

Application: suitable for use on parquet flooring, woodblock and wood strip to most common substrates. Can be used with underfloor heating systems. Apply by triangular notched trowel, size as recommended by the wood flooring manufacturer.

No waiting time necessary prior to laying wood flooring.

CodeSizeColourPalletBDLX16210LBuff Beige36

# BOND IT DUO "2 IN 1" WOOD GLUE Water Resistant Wood Adhesive

Fast drying, water-resistant PVA adhesive with a final bond strength which is stronger than the wood itself.

Application: develops a rapid bond strength and is suitable for hard and soft woods, decorative laminates, chipboard, blockwood and other engineered timber panels. Duo 2 in 1 can be used in applications where joints may be subjected to short term water contact or exposure to high humidity i.e. kitchen work surfaces, window frames, doors and stairs.

Duo 2 in 1 meets the "resistance to sustained load" (creep) test of BS 4071: Polyvinyl Acetate (PVA) Emulsion Adhesives for Wood.

Suitable for interior and exterior projects.

Code	Size	Colour	Вох
BDA050	125ml	White	24
BDA051	250ml	White	35
BDA052	500ml	White	20
BDA053	1L	White	12
BDA054	2.5L	White	4
BDA055	5L	White	4
BDA056	25L	White	1
BDA057	200L	White	1



#### BOND IT MONSTER THE BEAST Super-Strong, Solvent-Free, Waterproof Adhesive

One part, moisture curing D4 polyurethane adhesive for **internal** and **external** use. Solvent-free, rapid setting and very high strength, this adhesive has an open time of approximately 30 minutes.



Application: specially formulated for bonding a wide range of materials to create a super-strong and waterproof glue. The Beast can be used with all common household and building materials, such as wood, chipboard, laminate, metal, glass, concrete, stone, plaster, ceramic, leather and most plastics. It has excellent flexibility and is resistant to water and frost. It can also be overpainted or stained once cured. The Beast will cover approximately 250ml per m2 depending on the porosity of the substrate. Classified D4.

Code	Size	Colour	Box
BDAPU150	Brown	150ml	12
BDAPU250	Brown	250ml	9
BDAPU500	Brown	500ml	6

#### **BOND IT MONSTER WOOD ADHESIVE** Water Resistant, Fast Drying, Strong Adhesive

Fast drying, water resistant PVA adhesive for **internal** and **external** applications which produces a bond strength which is stronger than that of the wood itself.



Application: suitable for use on hard and soft wood types, decorative laminates, chipboard, blockwood and other types of engineered timber panels. Wood Adhesive can be used in applications where joints may be subjected to short term water contact or exposure to high humidity i.e. kitchen work surfaces, window frames, doors and stairs.

This Wood Adhesive meets the 'resistance to sustained load (creep)' test requirements of BS4071 "Polyvinyl Acetate (PVA) Emulsion Adhesives for Wood". 1L of Wood Adhesive will cover 5-6m2).

Code	Size	Colour	Box
BDGD3125	White	150ml	12
BDGD3250	White	250ml	9
BDGD3500	White	500ml	6

# **BOND IT MONSTER WIPES** Heavy Duty Strength Wipes

Suitable for cleaning up paint, adhesive, sealant, expanding foam, bitumen, oil, grease and much more!

Comes in a handy re-sealable tub which are foil sealed for freshness and to prolong shelf life.

Advantages: dual action (rough and smooth surface area), no need for water, soap and cleaner, no need for dirty towels, one wipe does the job, contains Aloe Vera.





bond



or Ceramics, Metal, Stots, eod, Glass & most Plastics Interior and Exterior Use 100% Waterproof (D4) AST BEAST BEAST

BE

BEA

BEAST

# **DIY SEALANTS**

# GLASS-MATE MIRROR ADHESIVE

#### Mirror Adhesive

A low modulus neutral cure (LMN) silicone for interior mirror



UIL DER

fixing. Has excellent unprimed adhesion on most mirror coatings and has outstanding resistance to heat and humidity. Not affected by sunlight, ultra violet radiation and temperature extremes. This product will accomdate thermal expansion and is non-corrosive and odourless.

Application: Suitable for internal bonding of mirrors, coated glass, glazed surfaces, ceramics, enamel, metals, PVCu, polycarbonate and treated or untreated wood, to most common substrates

Code	Size	Colour	Box
BDMIRT	EU3	Translucent	12

#### ULTI-MATE BUILDERS SILICONE Builders Silicone

A neutral cure silicone sealant with excellent primerless adhesion. **Application**: for sealing around doors and windows and for general building maintenance. Ulti-Mate can be used to fix mirrors, cap beading and glass in perimeter glazing applications. Also ideal for

expansion and joint sealing to pre-cast concrete, plaster, metals and brickwork.

> Suitable for both **interior** and **exterior** use, Ulti-Mate has **a lifespan of 25 years** and a movement value of 20%. CE approved.

Code	Size	Colour	Вох
BDUBL	EU3	Black	25
BDUBR	EU3	Brown	25
BDUGR	EU3	Grey	25
BDUT	EU3	Translucent	25
BDUWH	EU3	White	25

# LAMI-MATE TIMBER & LAMINATE SEALANT Flexible Sealant and Gap-Filler

A polymer enhanced flexible sealant and gap-filler which remains permanently flexible and can be stained or varnished once cured.

Application: designed for sealing all tongue and groove laminate and hardwood flooring and for sealing around



timber window and door frames. Lami-Mate can be used for draught-proofing and to provide an effective dust and airtight seal. Also to seal around all types of fitted furniture: bedroom and kitchen fittings, laminate, worktops, etc. Suitable for **internal** use, Lami-Mate has **a lifespan of 20 years**. CE approved.

Code Size Colour Box EU3 **BDI SOK** Oak 12 BDLSPN EU3 12 Pine BDLSDO EU3 Dark Oak 12 **BDISTK** FU3 Teak 12

# ROOF-MATE ROOF & GUTTER SEALANT

**Reinforced Lap Jointing Sealant** 



A polymerically reinforced lap jointing sealant and adhesive used to prevent leaks in gutters and downpipes. Forms a flexible seal.

> Application: suitable for repairing and maintaining general roofing, roof drainage systems and cracked downpipes, etc. Forms a flexible seal so is ideal to prevent leaks in gutters. Can be used on metal, construction grade plastics, paint, stone, timber, brick, bitumens and asphalt.

For external use, Roof-Mate has a lifespan of 15 years.

Code	Size	Colour	Вох
BDGR	EU3	Black	25

# MULTI-MATE MULTI-PURPOSE SILICONE Multi-Purpose Silicone

A multi-purpose, high modulus, acetoxy (HMA) silicone rubber sealant which contains fungicide. Permanently flexible and skins in minutes. Contains fungicide.



**Application**: for sealing and waterproofing in areas of high humidity.

Multi-Mate has excellent adhesion to glass, glazed surfaces, ceramic tiles, many plastics and most paints.

Suitable for **internal** and **external** use, Multi-Mate has a movement value of 12.5% and **a lifespan of 20 years**. CE approved.

CodeSizeColourBoxBDMGREU3Grey25

# RAIN-MATE ALL WEATHER SEALANT All Weather Sealant

A superior and highly flexible, water repellent, general purpose sealant with excellent adhesion to all surfaces even when damp. **Application**: suitable for use on brick, concrete, stone, all metals, painted or bare wood, glass, vinyl and most plastics.



Rain-Mate can be over-painted with certain paints, will not crack or slump or become brittle with age. Being rubber-based, it is compatible with bitumen, asphalt and roofing felt and is ideal for roof repairs in damp conditions, sealing doors, windows, roofs, cladding and vehicle bodies.

For external use. Rain-Mate has a lifespan of 25 years and a movement value of 25%.

Code	Size	Colour	Вох
BDAWSBL	EU3	Black	12
BDAWSCL	EU3	Clear	12
BDAWSWF	H EU3	White	12

# **DEC-MATE FLEXIBLE FILLER** Quick Drying Flexible Filler

A quick drying, permanently flexible **interior** filler which can be smoothed and over-painted within 1-2 hours of application. Adheres to most surfaces and allows low movement in joints between materials and substrates.



Application: for sealing and filling gaps and cracks in skirting boards, ceilings, stair risings, fitted furniture and light fittings. Dec-Mate can also be used for filling interior cracks and damage in plaster, brick, concrete and plasterboard.

It can be over-painted with emulsion paint as soon as a skin forms after approximately 1 hour. For oil based paints, allow to dry for 24-48 hours.

Colour

High White

Box

25

Dec-Mate has a lifespan of 10 years.

CodeSizeBDDF400EU4

**GP200 GENERAL PURPOSE SILICONE** 

# Contractors Grade Silicone Sealant with Fungicide

A general purpose, contractors grade acetoxy silicone sealant with fungicide, suitable for most sealing jobs around the home. Quick curing and mould resistant. Suitable for sealing and waterproofing in areas of high humidity. It has excellent adhesion to glass, glazed surfaces, ceramic tiles, many plastics and most paints.

GP 200 comes in 4 colours: white, black, translucent and brown.

**Application**: ideal for applications in bathrooms, shower rooms, utility rooms and general DIY applications including kitchen work tops.

Not suitable for fixing of mirrors or sealing natural stone or marble. Note: This product should not be used with aquaria or on bitumen or asphalt.

#### CE Approved:

Conforms to EN15651-1,3; F EXT-INT, S1.

Specification Summary			
Tooling Time	5-10 minutes		
Tack Free Time	Less than 30 minutes		
Cure Time	1-2mm per day		
Application Temperature	+5°C to +30°C		
Service Temperature	-40°C to +100°C		
Movement Accomodation	20%		
UV Resistance	Excellent		
Ozone Resistance	Excellent		
Adhesion	Good to glass, painted surfaces and most comon building materials		

Code	Size	Colour	Box
BDSVBL	EU3	Black	25
BDSVBR	EU3	Brown	25
BDSVT	EU3	Translucent	25
BDSVWH	EU3	White	25

#### FLASH-MATE ROOF SEALANT Fast Skinning Roof Sealant

A fast skinning roof sealant which reduces weather ingression, tile lift and noise. Tough, resilient and compatible with lead.



Application: use to bond glass and glazing plastics as well as small sections of roofing materials under repair. Ideal for sealing roof lights, conservatories, soffits, glass houses, industrial roofing systems and lead flashings. Also suitable for use on metals, concrete, mortar and plaster.

Flash-Mate has excellent UV, heat and ozone resistance and sets to a tough, resilient rubber seal.

This product has a **25 year lifespan** and a movement value of 12.5%. CE approved.



CE

# General Purpose Quick Curing

CONTRACTORS GRADE SILICONE

**GP200** 



#### **FIRE RATED SEALANTS**

#### BOND IT FS4 FIRESHIELD AC SEALANT Intumescent Sealant

A high performance, flexible acrylic intumescent acoustic sealant and adhesive which will swell to provide an inert barrier to smoke and flames.



**Application**: forms an acoustic and fire rated intumescent barrier in floor and ceiling joints, dry lining systems, partition walls, etc. FS4 has non-slumping and rapid skinning properties and can be over-painted within 1 hour with fire resistant paint.

For **interior** use. The fire resistance achievable with FS4. FS4 is available in cartridges and foil sausages, has **a lifespan of 12 years** and a movement value of 12.5%.

Code	Size	Colour	Box
BDFWH	EU3	White	25

#### BOND IT LN11 FIRESCREEN SEALANT Fire-Resistant Silicone Sealant

Fire resistant silicone for the protection of engineered movement joints in buildings.



Application: LN11 maintains the integrity of fire walls when breached by conduits, pipes, etc. Sealing panels, door frames, partitions, cap beading of protective fire glazing. Prevents the spread of flame, smoke, toxic gases and water. Halogen free to reduce the risks of toxic fumes and corrosion in the event of fire.

Bond It LN11 has high movement capabilities and excellent adhesion to all common building materials. LN11 also has a long life expectancy. It is a neutral curing chemical system suitable for use on concrete, cement, all kinds of metals, timber, glass, ceramics and many plastics.

Code	Size	Colour	Box
BDLN11	310ml	White	12

#### TRADE AND SPECIALIST SEALANTS

#### BOND IT FG8 FOOD GRADE SILICONE Food Grade Silicone

A specially formulated silicone sealant for applications in the food, machinery and food preparation industries. Contains a powerful antifungal compound to prevent microbial growth on seals.



**Application**: FG8 can be used to create waterproof seals and joints in machinery, to seal between ceramic tiles and kitchen fittings and to seal between walls and floors and around deep freezers, refrigeration units and food processing machinery.

Suitable for **internal** use, FG8 has **a lifespan of 25 years** and a movement value of 25%.

Conforms to FDA No 21 CFR 177.1210 & 177.2800. Certified by NSF for food contact.

Code	Size	Colour	Box
BDFG8WH	310ml	White	12

#### BOND IT LN7 LMN SILICONE Pure Silicone

100% neutral cure silicone sealant. Gives off no corrosive vapours during cure when exposed to air.

Application: ideal for construction, engineering and electrical applications. Suitable as a rubber adhesive for bonding most

Provide the second seco

materials. For use on glass, ceramics, all metals and sealed timber, concrete, mortar, plaster, most plastics, uPVC, polycarbonate and all painted surfaces.

A high extensibility sealant for **external** and **internal** applications. LN7 has **a lifespan of 25 years** and a movement value of 25%.

Size	Colour	Box
310ml	Aluminium	12
310ml	Black	12
310ml	Translucent	25
310ml	White	25
	310ml 310ml 310ml	310mlAluminium310mlBlack310mlTranslucent

#### BOND IT HT30 HIGH TEMPERATURE SILICONE Heat Resistant Sealant

A ready-to-use, acetic curing silicone sealant. Specifically designed for high temperature applications, it is UV resistant and weatherproof.



Application: for sealing joints which are exposed to high temperatures. After curing, HT30 will permanently resist temperatures of 200°C and will resist temperatures up to 300°C for short periods. It can also be used with nylon, ABS, metals and polyester.

For **internal** and **external** use, HT30 has **a lifespan of 25 years** and a movement value of 25%.

Code	Size	Colour	Box
BDHT30R	310ml	Red	12
BDHT30BL	310ml	Black	12

#### **BOND IT PU18 ADHESIVE & SEALANT** Polyurethane Adhesive and Sealant

A one-part, moisture curing, polyurethane adhesive and sealant, formulated for the construction and transport industries.

**Application**: with a shore hardness of 40, PU18 produces tough, elastic seals and joints with excellent adhesion characteristics



to help dampen vibration. Oil resistant, PU18 can be used for sealing and bonding in engineering, construction, automotive and marine applications. Ideal for use on concrete, wood, metals, GRP, rubbers and most common building materials, PU18 is perfect for fixing wooden floors.

For **internal** and **external** use, PU18 has a **lifespan of 25 years** and a movement value of 25%. CE approved.

Code	Size	Colour	Box
BDPU18BL	310ml	Black	12
BDPU18GR	310ml	Grey	12
BDPU18WH	310ml	White	12

#### **BOND IT S3 SANITARY SEALANT** Fungal Resistant Silicone Sealant

A low maintenance, premium grade, fungal resistant silicone sealant. Contains a strong biocide to retard unsightly mould and fungal growth. Specially designed to seal in damp and humid areas.



Application: suitable for use with ceramics, glass, melamine laminates and sanitary plastics, anodised aluminium, lacquered metals, painted timber, painted plaster, primed or painted concrete and primed metals. Use for sealing around worktops, basins, sinks; bedding basins to vanity units and sealing shower trays and shower units. S3 has a lifespan of 25 years and a movement value of 12.5%.

Code	Size	Colour	Box
BDS3T	EU3	Translucent	25
BDS3WH	EU3	White	25
BDS3IV	EU3	lvory	25

#### **BOND IT WP70 GLAZING SILICONE** Rapid Curing Oxime Silicone

A rapid curing silicone with good adhesion properties and additional uPVC adhesion promoters.



Application: for perimeter sealing of external wood, aluminium and uPVC door & window frames and for the weather sealing and flexible jointing of infill panels. Can also be used on concrete, plaster and mortar, unsuitable for aquaria or on bitumen and asphalt.

Recommended for **external** use only.

WP70 cannot be overpainted and may yellow if used indoors and in low UV light situations. WP70 has a movement value of 12.5%. CE approved.

Code	Size	Colour	Вох
WP70ANT	EU3	Anthracite	25
WP70BL	EU3	Black	25
WP70BR	EU3	Brown	25
WP70BU	EU3	Buff	25
WP70GR	EU3	Grey	25
WP70RW	EU3	Rosewood	25
WP70T	EU3	Translucent	25
WP70TF	EU3	Toffee	25
WP70WH	EU3	White	25

#### BOND IT AS900 ACOUSTIC SEALANT Acrylic Joint Filler

A flexible, acrylic joint filler, acoustic sealant and adhesive for plasterboard partitioning systems.



Application: offering good adhesion to most common building materials, AS900 is ideal for interior sealing around drywall partitioning to reduce noise transmission across cracks and joints with low movement. Also ideal for sealing interior skirting boards and fixing plasterboard into partition systems to reduce vibration and movement.

AS900 is for interior use and has a lifespan of 25 years.

Code	Size	Colour	Вох
BDAS900	EU9	White	12

#### BOND IT WP100 GLAZING SILICONE High Grade Oxime Silicone

A high grade, neutral cure silicone, features rapid curing with good adhesion properties and additional uPVC adhesion promoters.



PRO Plus Gun

Sausage Gun

Application: for perimeter sealing of external wood, aluminium and uPVC door and window frames for weather sealing and flexible jointing of infill panels. Can also be used on concrete, plaster and mortar.

Designed for **external** use, WP100 has a movement value of 25%. Not suitable for use with aquaria or with bitumen or asphalt. Cannot be overpainted.

Carries a risk of yellowing if used in areas of low UV light (e.g. indoors).

CE approved.	
--------------	--

Code	Size	Colour	Box
WP100ANT	EU3	Anthracite	25
WP100BL	EU3	Black	25
WP100BR	EU3	Brown	25
WP100RW	EU3	Rosewood	25
WP100T	EU3	Translucent	25
WP100WH	EU3	White	25
WP100CR	EU3	Cream	25
WP100CG	EU3	Chartwell Green	25

#### **GUNS AND ACCESSORIES**

#### ECONOMY SEALANT GUN

An economy extruder gun for use with all cartridge products. Manufactured in the UK, it features an anti-drip release and an epoxy-coated frame.

#### **PRO PLUS GUN**

A heavy duty, high quality 10.5" (400ml) metal extrude for use with larger cartridge products. The Pro Plus Gun features robust construction and has a rotating barrel and an anti-drip release.

#### SAUSAGE GUN

Designed for use with 600ml (15") foil packs/sausages, the enclosed aluminium barrel can also be used with standard cartridges. Supplied with 1 nozzle.



BDHDG

BD600SG

400ml

600ml

Blue

Silver

12

1

# **BUILDING PRODUCTS**

#### **BUILDING CHEMICALS AND ADMIXTURES**

#### **BOND IT LIQUID MORTAR PLASTICISER** Extra Strength Additive for All Portland Cements



A chemically balanced plasticiser based on synthetic air entraining agents which is designed to improve the workability of bricklaying and plastering mortars.

Application: increases the resistance to freeze-thaw cycles and reduces the risk of cracking and crazing and removes the need for lime when added to a cement mixture. Available as either a red or brown liquid, simply add to the cement mix.

Conforms to EN934-3 (2009) + A1 (2012)

Code	Size	Colour	Вох
BDH010	5L	Red	4
BDH011	25L	Red	1
BDH012	200L	Red	1
BDH015	5L	Brown	4
BDH016	25L	Brown	1
BDH017	200L	Brown	1

#### **BOND IT CONTRACTORS GRADE PVA** Primer, Sealer and Bonding Agent

All purpose contractor's grade primer, sealer and bonding agent that dries quickly to give a high bond strength.



Application: ideal for use with plaster, timber, gypsum all boards and paper. Readily dilutable when used as a primer for sealing applications or as an additive to cement and plaster to improve adhesion and cure. Can be used for **interior** projects.

Code	Size	Colour	Вох
BDAC05	500ml	White	20
BDAC1	1L	White	12
BDAC2	2.5L	White	4
BDAC5	5L	White	4
BDAC25	25L	White	1
BDAC200	200L	White	1

#### BOND IT INTEGRAL WATER RESISTANT PLASTICISER

#### Plasticity Improver for Mortars and Renders

A high strength cement waterproofer which improves workability and plasticity of concrete and mortar in the wet state and resists water penetration, even under pressure.



Application: suitable for internal and external rendering, roof screeds, swimming pools, tanks, retaining walls, basement walls and reservoirs. Available as a either a pink or green liquid, simply add to the gauging water.

Dosage rate: approximately 0.25-0.5L/25kg of cement.

Code	Size	Colour	Box
BDH020	5L	Pink	4
BDH021	25L	Pink	1
BDH022	200L	Pink	1
BDH200	5L	Green	4
BDH201	25L	Green	1
BDH202	200L	Green	1

#### **BOND IT STABILIZING SOLUTION** Water-Based Bonding and Priming Agent

A white, ready-to-use, water-based treatment for bonding and priming surfaces prior to painting and decorating. This product stabilises poor surfaces, seals and binds chalky or weathered areas, gives a sound base for decorating and is quick drying.



Application: a treatment for surfaces which are old, weathered, chalky or porous. Can be used on most substrates (even damp surfaces) including concrete, cement, plaster, plasterboard, renders, pebble dash and MDF, etc. Do not apply when the temperature is below 50C or when rain or frost is imminent.

Code	Size	Colour	Box
BDH130	5L	White	4

#### **BOND IT PVA ADHESIVE AND SEALER** Sealer, Primer, Dustrpoofer and Bonding Agent

High solids, high performance sealer, primer, dustproofer and bonding agent. PVA Bond improves adhesion and reduces cracking in cements and plaster.



Application: primes and seals porous surfaces, is quick drying and produces a very high bond strength. Use of PVA Bond provides better water resistance, adhesion and flexibility and has excellent drying properties at low temperatures. Ideal for use as a plaster primer, a porous surface primer and sealer. Also as a rendering coat for internal applications, an admixture, a dust sealer and as a general purpose adhesive.

Code	Size	Colour	Box
BDA021	500ml	White	20
BDA022	1L	White	12
BDA024	2.5L	White	4
BDA023	5L	White	4
BDA025	25L	White	1
BDA026	200L	White	1

#### **BOND IT SBR ADMIXTURE** Bonding and Waterproofing Aid

A styrene butadiene copolymer latex which increases flexibility of cement screeds and mortars and improves water and chemical resistance and durability.



Application: suitable for internal and external floors and rendering in areas of continual or intermittent water and chemical contact. SBR Admixture has excellent waterproofing properties, improves the adhesion of cementitious screeds and reduces the risk of shrinkage and cracking when repairing floor screeds. This product also acts as a superb bonding agent for new to old concrete

Code	Size	Colour	Box
BDH039	2.5L	White	4
BDH040	5L	White	4
BDH041	25L	White	1
BDH042	200L	White	1

#### BOND IT PLASTERERS PREGRIT Internal Plaster Bonding Agent

A pre-mixed internal plaster bonding agent with added aggregate to provide a key prior to plastering on smooth surfaces.



Application: pigmented pale yellow to identify treated areas, Plasterers Pregrit contains sand/aggregate which after a simple one-coat application, will provide a good key to smooth surfaces, thereby allowing plaster to bond more effectively to concrete, plaster and difficult or low/non-porous surfaces. Formulated for internal use, this product is unsuitable for external applications.

Code	Size	Colour	Box
BDPG05	5L	Pale Yellow	1
3DPG10	25L	Pale Yellow	1

эL	Pale Yellow	T	
25L	Pale Yellow	1	

		1	
-	Pale Yellow	1	

#### **BOND IT POWER MIX Concentrated Plasticiser**

A premium quality, concentrated mortar plasticiser designed to improve the workability of bricklaying and plastering mortars.



Application: simply add the required amount of liquid to the gauging water to increase the resistance of the mortar to freezethaw cycles. Power Mix reduces the risk of cracking and crazing and removes the need for lime. This product is 20 times stronger than standard mortar plasticisers.

1L is sufficient for 250 25kg bags of cement.

Code POWM05 POWM1

Size	Colou
500ml	Brown
11	Brown

Box

15

10

#### **BOND IT POWER-FROST** Concentrated Frostproofer

A fast acting, concentrated building chemical that increases frost resistance and accelerates setting times of concrete. This product



contains no chloride, is non-corrosive and so will not degrade steel wall ties, reinforcements or other steel items and the bottle ensures controlled dosage for consistency of mix.

Application: simply add to the cement mix at the recommended dose. Reduce the amount of gauging water as appropriate (maximum reduction is 15%).

This product is 5 times stronger than standard frostproofers.

Dosage: 500ml per 25kg of cement.

Code	Size	Colour	Box
POWF1	1L	Blue	10


#### **BOND IT POWER PROOF Concentrated Waterproofer**

#### A professional grade, concentrated waterproofing solution and concrete/render admixture.

Application: Power Proof provides waterproofing for internal and external rendering, roof screeds, swimming pools, tanks, rendering walls, basement walls and reservoirs. Simply add the required amount of Power Proof to the gauging water. This product is 10 times stronger than standard integral waterproofer. Dosage: 25-50ml/25kg of cement.

Conforms to EN934-3 (2009) + A1 (2012)

This product contains no chloride and so is non-corrosive.





#### BOND IT POWDERED CEMENT DYE Chloride-Free, Permanent Cement Powder Colour

Easy to use cement colour, made with premium quality oxide pigments. Vary the amount of powder to produce different colour strengths in mortars, cements, concretes and rendering.



Application: simply add to mix before addition of water. Dosage is 5kg dye to 25kg cement. Always check the colour with a small, isolated section before proceeding. Chloride-Free.

Code	Size	Colour	Box
BDH060BL	1kg	Black	6
BDH060BR	1kg	Brown	6
BDH060R	1kg	Red	6
BDH060Y	1kg	Yellow	6

#### BOND IT ALKYD FLOOR PAINT

Hard Wearing, Satin Finish Floor Paint

A high solids, heavy duty formulation floor paint designed to provide an easy clean satin finish.



Application: ideal for concrete, stone, brick and wooden floors subject to light to medium traffic such as fork lift trucks and scissor lifts in garages, warehouses, workshops, factories, storerooms and pedestrian walkways where enhanced durability, abrasion resistance and good resistance to dilute acids, alkalis and oils including brake fluid, diesel and sump oil, is desirable. Apply with brush or roller.

Code	Size	Colour	Box
BDFPR5	5L	Red	4
BDFPGR5	5L	Grey	4
BDFPLG5	5L	Light Grey	4

#### **BOND IT WIDE GAP JOINT-FILL** All-Weather, One Part Paving Compound

A single component, ready-to-use joint filling system for the simple and rapid pointing of paved areas with joints over 5mm. This is a unique blend of polymers and aggregates which blend together chemically on exposure to the atmosphere, forming



a stable, solid mass which remains permeable and allows rain water to pass, reducing puddling. Can be used inside and outside.

Application: compatible with most types of paving including natural stone, terra-cotta, clay, concrete and cobble stones.

Size	Colour	Box
15kg	Buff	1
12kg	Grey	1
12kg	Black	1
	15kg 12kg	SizeColour15kgBuff12kgGrey12kgBlack

#### BOND IT LINE MARKER PAINT

#### Lead-Free, High Performance Resin Line Paint



Hard wearing and fast drying with excellent UV stability. A CFC-Free and non-clogging semipermanent formula which lasts up to 3 months. 500ml can features special non-drip cap.

Application: suitable for interior and exterior use everywhere floor lines are required. Product can be used on asphalt, concrete, wood composites, gravel and grass.

Code	Size	Colour	Box	Use
BDLM001	750ml	Yellow	12	General Use
BDLM002	750ml	White	12	General Use
BDLM003	750ml	Red	12	Electricity
BDLM004	750ml	Blue	12	Water
BDLM005	750ml	Green	12	Cable Work
BDLM006	750ml	Orange	12	Covering Old Lines
BDLM007	750ml	Black	12	General Use

#### BOND IT READY MIX FILLER

Multi-Purpose, Domestic Repair Filler

An all purpose ready mixed filler for repairs, both **internal** and **external**.



Application: provides a crack resistant, extra smooth finish which can be sanded, over-painted, papered or stained once dried. Ready Mixed Filler will fill gaps and holes in plaster, brick, plasterboard, render, stone and most other building materials.

CodeSizeColourBoxBDRMF750750gWhite12

#### **BOND IT POT HOLE REPAIRER** Cold Lay, Asphalt Repair Compound

A specifically designed solution for use on roads, pavements and car parks. Fully compatible with the existing road surface, Pot Hole Repairer is instantly traffickable in wet, freezing and hot conditions.



Application: easy to use, no water or mixing is required. This solvent-free formulation contains bitumen, and can be applied to pot holes at depths of up to 100mm in a single application.

Greater depths can be achieved using a layering method, and the finished surface offers a high skid resistance.

Code	Size	Colour	Box
BDPHR25	25kg	Black	1



#### **ONE HIT WONDER** Ready Mixed Lightweight Filler

A ready mixed compound which fills holes and gaps in a single application. One Hit Wonder provides a super smooth, brilliant white finish that does not require sanding.

Application: ideal for both internal and external use, this filler is non slumping and shrink resistant. It is perfect for uneven surfaces or for difficult and awkward areas, e.g. ceilings. Suitable for plaster, concrete, brick,

wood or stone.

Code	Size	Colour	Box
BDLWF05	500ml	White	12
BDLWF1	1L	White	6



#### **ONE PART WOOD FILLER** All Purpose, Easy to Use, Waterproof Ready Mixed Filler

A one part, solvent-free wood filler ideal for filling small imperfections (max 5mm depth) and covering the recesses left by nails and screws in wood.

Application: ideal for general wood filling in windowsills, frames, banisters, MDF and laminates and for repairing wet rot damage in both **internal** and **external** locations.

Code	Size	Colour	Box
BDWF1PN	250ml	Pine	6
BDWF1WH	250ml	White	6
BDWF1LO	250ml	Light Oak	6
BDWF1DO	250ml	Dark Oak	6
BDWF1TK	250ml	Teak	6



#### **TWO PART WOOD FILLER** Tough, Durable Polyester Resin Filler

Long lasting repair formula for all wood types which can be stained, painted or varnished once cured and is sandable after 30 minutes and can be drilled, nailed, planed or carved once fully dry. Non-shrinking.

Application: ideal for the general wood filling of windowsills, frames, banisters, MDF and laminates, and for repairing wood damaged by wet rot in both internal and external locations.

Code	Size	Colour	Вох
BDWF2PN	500g	Pine	6
BDWF2WH	500g	White	6
BDWF2LO	500g	Light Oak	6
BDWF2DO	500g	Dark Oak	6
BDWF2TK	500g	Teak	6

#### **BOND IT UNIVERSAL BUILDING RENDER** Pre-Mixed, Sand, Lime and Cement Render

A one coat, moderate strength render for moderate strength backgrounds and moderate exposure conditions.



Application: as a base coat, Universal Building Render is applied in one coat, avoiding the drying time associated with multicoat render systems. It is weather resistant, resists penetrating damp and yet allows walls to breathe.

Universal Building Render will not chip, flake or peel, is tough and flexible, has excellent adhesion and can be hosed down. Use **internally** and **externally** on suitably prepared substrates including brickwork and concrete.

Code	Size	Colour	Box
BDER25	25kg	Grey	1

#### BOND IT CEM-QUIK RAPID SET MORTAR Premium Rapid Set Mortar

A cement based product for **interior** and **exterior** use which is simple to apply and sets hard in approximately 30 minutes. Ideal as a patch repair or where installations require a fast repair job.



Application: for repairs to most masonry substrates; gap and crack filling, jointing and sealing earthenware pipes and drains, patching steps and windowsills, setting and bedding WCs, sinks, railings and posts. Levelmaster Cem-Quik will fill holes and cracks in concrete, brick, blocks and stone. Simply add water and mix to a smooth mortar, apply with a trowel or a filling knife up to a thickness of 25mm. Suitable for **internal** and **external** repairs.

Size	Colour	Box
Зkg	Grey	1
5kg	Grey	1
	<b>Size</b> 3kg 5kg	3kg Grey

#### **BOND IT RENDER MESH** Alkali Resistant, Glass Fibre Woven Mesh

A 160g, glass fibre 4x4mm mesh ideal for the reinforcement of render or basecoat plaster and as an anti-crack reinforcement system.

**Application**: used with Universal Building Render, this mesh provides incredible strength, is light, economical, tear resistant and easy to use. It stabilises surfaces, prevents cracks forming and is widely used on external wall insulation systems, roof tiles and carpets.

Render Mesh can also be used as a reinforcement for waterproof membranes, felts and similar roofing materials. It can be used in conjunction with tile adhesives to distribute stress within ceramic, marble and stone tiles and with all variety of floor coverings to maintain stability and durability.

Code	Size	Colour	Box	×
BDRENM	50m x 1m	Pink	1	XX

(

1

#### **FIRE CEMENT**

#### BOND IT FIRE CEMENT

Ready-Mixed Cement for High Temperature Applications



A buff coloured cement which has a consistency similar to putty. Resistant to high temperatures, (once cured, up to 12500C) and is both air and heat setting.

A blend of high quality clays and selected fillers which sets rock hard when exposed to heat.

Application: suitable for use on any surface that is exposed to high temperatures in interior situations, including: continuous burning fires, iron flue pipe jointing, build and repair of fire backs.

Fire Cement can be used to mend cracks and broken bricks in grates and stoves and for pointing between metals and bricks. Please note that this cement is water soluble and should not be used outside or where joints can be eroded by water.

Code	Size	Colour	Box
BDCF002	2kg	Buff	6
BDCF005	5kg	Buff	1

#### SURFACE TREATMENTS

#### **BOND IT BRICK PATIO CLEANER** Premium Hard Surface Acid Cleaner

A powerful acid-based cleaner for exterior use that will remove cement and mortar splashes, grime, oil, grease and other difficultto-remove stains from brickwork, patios, garages, paving, concrete floors and warehouses.



Application: apply with a brush or broom and allow to stand for 10-15 minutes (do not allow to dry out) and simply scrub the stains away with a stiff brush. Rinse away residue with water. Brick & Patio Cleaner can be used undiluted to remove stubborn stains or diluted to 4 parts water and brushed on to remove efflorescence.

Code	Size	Colour	Box
BDH080	2.5L	Clear	4
BDH081	5L	Clear	4
BDH082	25L	Clear	1
BDH083	200L	Clear	1

#### **BOND IT DUST PROOFER & HARDENER** Premium Quality, Low Viscosity Concrete Sealer

A high quality, chloride-free, low viscosity liquid which permeates and chemically seals concrete. It produces a hard wearing, non-dusty surface suitable for garage, warehouse, factory and workshop floors and is suitable for both internal and external use.



**Application**: apply as a uniform, thin coat to the surface, brushing in well and not allowing the liquid to puddle. Once this first layer has cured (normally overnight), apply a second coat.

Very porous surfaces may need further applications.

Code	Size	Colour	Box
BDH090	5L	Clear	4
BDH091	25L	Clear	1
BDH092	200L	Clear	1

#### **BOND IT FROST PROOFER & RAPID HARDENER** Protection for Bricklaying & Rendering at Low temperatures

A high performance building chemical that increases frost resistance and accelerates the setting time of cement by improving the rate of hydration.



Application: specially developed for bricklaying and rendering at low and sub-zero temperatures, when added to the mix this product will improve workability and increase strength gain and resistance to water penetration. It allows up to 15% reduction in gauging water and can also reduce curing times and shrinkage. Frostproofer will not degrade steelwork or wall tiles as the formulation is chlorine-free.

Code	Size	Colour	Box
BDH030	5L	Light Blue	4
BDH031	25L	Light Blue	1
BDH032	200L	Light Blue	1

#### BOND IT MOULD STOP Powerful Mould-Removing Cleaning Agent

A premium grade, powerful cleaning agent formulated to remove mould, mildew, organic growth and lichen, etc. which is suitable for both internal and external applications.



Application: ideal for use around the home, in the garden, in caravans, boats, public walking areas, farm yards, kennels and stables.

Mould Stop removes all types of organic green growth, algae, etc. from brick, stone, roof tiles, corrugated iron, lead, built-up felt, concrete, wood, tarmacadam, painted surfaces, decking, garden furniture, paviours, plastic and glass. It can also be used on fabric awnings. Mould Stop is formulated to be used undiluted either by spray, soft broom, paint brush or watering can.

Code	Size	Colour	Box
BDH071	1L	Clear	12
BDH073	2.5L	Clear	4
BDH070	5L	Clear	4

#### **BOND IT SILICONE WATERSEAL** Premium Water Repellent

Designed to repel water from exterior masonry work and allow walls to breathe, reducing the risk of damage caused by water and frost.



**Application**: will not change the physical appearance of the brick, stone or concrete but provides an effective waterproof coating.

A secondary benefit is that Waterseal will also repel water-borne dirt and resist fungal growth as well as helping to reduce heating costs due to the fact that Waterseal allows the emission of water vapour from interiors and cavities, so energy is no longer wasted drying out wet walls .

Code	Size	Colour	Box
BDH050	5L	Clear	1
BDH051	25L	Clear	1

#### **BOND IT PATIO SEAL** Premium Grade Sealer

Designed to protect blocks, patios and sand joints from water penetration, spillages of oil, petrol and grease and build-up of dirt and grime.



Application: shake well before use and ensure a dry application surface. Apply a single coat using a brush, roller or squeegee, ensuring no ponding occurs. For the best results, apply 2 coats allowing the first coat to dry (3-4 hours). Do not apply to wet surfaces, in conditions of high humidity or when rain is imminent. After application, protect treated surface from rain until fully dry.

Code	Size	Colour	Box
BDH061	5L	White	4
BDH063	25L	White	1

#### BOND IT SILICONE ULTRA WATERSEAL Solvent-Free Silicone

A premium grade, solvent-free silicone waterseal. It provides a micro-porous water repellent coating for exterior masonry work which will seal but allow emission of water vapour, ensuring cavities and interiors remain dry.



Application: simply using either a brush or a non-atomising spray, Ultra Waterseal will protect brick, stone, concrete and unglazed tiles against water and frost, providing a coating which does not change the aesthetic appearance of the building.

Ultra Waterseal's properties will also repel waterborne dirt and resist fungal growth.

Code	Size	Colour	Box
BDH120	5L	Clear	4

#### **BOND IT INDIAN STONE SEAL** Solvent-Free, Advanced Floro Polymer

A special formulation designed to seal and protect high quality natural stone patios against water and oil penetration. Provides an easy-clean surface and helps prevent fungal and moss growth.



Application: simply applied with brush, roller or squeegee, Indian Stone Sealer will protect patios, natural stone, walls and buildings from water ingress, oil spills and other mishaps such as fat splashes from barbecues. It will not affect the colour or appearance of the surface and provides a highly durable and effective protective coating. Use in conjunction with Bond It Organic Cleaner, Mould Stop (page 44) and Patio Blaster (see below).

Code	Size	Colour	Box
BDISS5	5L	Clear	4

#### BOND IT PATIO BLASTER Concentrated Disinfectant

For the removal and prevention of green mould, lichens and algae on hard surfaces. Patio Blaster is a simple 3 step system - dilute, apply and leave to dry.

**Application:** for use on patios, tarmac and asphalt driveways, fencing, decking, pathways, roofing, painted & glazed pots, garden furniture and ornaments, weatherboard, brickwork, masonry, york stone, concrete, pebble dash, garden sheds, greenhouses, conservatories, gravestones, gravel, PVC, caravans, tennis courts and other artificial play/sports surfaces.

Box

4

4

Patio Blaster is biodegradable and antibacterial.



Colour Clear Clear



#### BOND IT DECKING CLEANER Fast Acting Solution for Weathered Timber Decking

A specially formulated cleaner to revive weathered hard and soft wood timber decking.



Application: use to clean old decking before application of stains and oils as it will provide a good key and ensure a long lasting finish. Decking Cleaner will remove dirt and natural deposits from the timber including any organic growth. Simply pour directly onto the deck, scrub immediately with a stiff brush and leave for 15-20 minutes.

Size Colour Box Code BDDCL5 51 Clear

4

#### BOND IT HIGH STRENGTH BRICK ACID Strong Hydrochloric Acid Cleaner

A double strength, hydrochloric acid cleaner that will remove cement and mortar splashes from brickwork, paving and concrete.



Application: this is a very strong product, so always test a small area prior to application. Brick Acid should be diluted to the recommended levels, applied with a stiff brush and allowed to stand for 10-15 minutes (but not allowed to dry out completely). The area to be cleaned should then be scrubbed with the brush and rinsed with water to take away the dissolved matter and any remaining acid. Stubborn stains can be treated with undiluted Brick Acid

Code	Size	Colour	Box
BDH085	5L	Clear	4
BDH086	25L	Clear	1

#### **BOND IT DECKING OIL** Protective Barrier Oil for Timber Decking

A ready-to-use oil which nourishes wood and restores the natural oils lost through weathering.

Decking Oil provides a protective barrier against water penetration where constant weathering can cause swelling and warping.



Application: use on untreated, previously oiled and weathered decking to provide a protective finish which is resistant to UV light and will prevent mould and algae build-up. Suitable for all types of garden decking, simply apply with a good quality brush or a roller.

Code	Size	Colour	Вох
BDDOC2	2.5L	Natural	2
BDDOC5	5L	Natural	1

#### BOND IT MOULD RELEASE OIL

**Chemical Release Agent** 

A chemical release agent for mould and shutter surfaces prior to casting concrete, providing a clean release.



Application: suitable for use with plywood, timber, steel and plastic faced formwork. Once the formwork is removed, the concrete will have a smooth, uniform hard finish with reduced incidence of blow holes.

Apply Mould Release Oil before the first pour and re-apply before any subsequent pours immediately after stripping and cleaning the mould.

Mould release Oil is easily and simply applied with a brush.

Code	Size	Colour	Box
BDH150	5L	Straw	1
BDH151	25L	Straw	1

#### **PATINATION OIL Protective Lead Coating**

A protective coating for new and restored leadwork, specially designed to minimise unsightly staining on newly applied lead and the materials fixed below it.

Application: the oil should be applied as soon as possible, preferably immediately after each step of the leadwork has been completed using a soft, absorbent cloth. When applying, work horizontally from top to bottom, maintaining a wet lower edge. Coverage is up to 60m<sup>2</sup>/L, this product is designed for external use only.

Code	Size	Colour	Box
BDPO05	500ml	Straw	10
BDPO1	1L	Straw	10



#### WATERPROOFING

#### **BOND IT PLUG-IT Rapid Setting Cement Plug**

A cement based rapid-setting compound for plugging running water leaks and overcoating joints prior to the application of Bond It Tanking Slurry.



Application: simply mix with water into a putty and then, with a gloved hand or a trowel, plug the mixture into a hole or crack and press hard until the plug is set - Plug It cures in less than 2 minutes.

This product is also ideal to use where fixings need to be anchored and is suitable for both interior and exterior use

Code Size Colour Box BDH106 5kg Grey

#### BOND IT TANKING SLURRY Waterproof Cement Based Coating

A cementitious waterproof coating designed for use below and above ground for cellars, retaining walls and tanks. Tanking Slurry is a blend of Portland cements, quality graded aggregates and chemical modifiers, providing a waterproof coating system.



Application: for use internally and externally on tanks, pits, swimming pools, above and below ground floors, cellars, underground rooms, interior spaces, e.g. ducting, party walls, lift shafts and fish ponds.

Tanking Slurry is WRAS approved for use with potable water. It has excellent adhesion to most common building materials and is water based and so safe to apply on damp surfaces. It is resistant to positive and negative water pressure up to 7 Bar.

Code	Size	Colour	Box
BDH107	20kg	Grey	1

# **CLEANERS**

1

#### BOND IT MULTI WIPES SPRAY Liquid Spray Cleaner and Sanitiser

A multi-purpose spray for cleaning and sanitising hands, tools and surfaces. Cleans paint, adhesive, sealant, uncured expanding foam, bitumen, oil, grease and much more

Powerful anti-bacterial performance, use Multi Wipes Spray for stubborn stains or to revitalise wipes in a tub. For interior and exterior use.

	Code	Size	Colour	Box	
	BDHWS1	1L	Clear	12	
~					
6					

Check Out **BOND IT** MONSTER WIPES page 35

#### **BOND IT MULTI WIPES**

Multi-Purpose Trade Wipes

Perfect for cleaning and sanitising hands, tools and surfaces. Multi Wipes will clean paint, adhesive, sealant, uncured expanding foam, bitumen, oil, grease and much more.

They feature a powerful anti-bacterial formula and contain Aloe Vera to minimise skin irritation.

Application: simply open and dispense the wipes or spray the liquid. The 100 pack is foil sealed to enhance freshness and shelf life and the spray can be used for stubborn stains and to re-vitalise the tub wipes.

Code	Size	Colour	Box
BDHW80	100 wipes	White	8



# **EXPANDING FOAMS**

#### **BOND IT B1 FOAM**

# High performance, fire rated foam tested to EN1366-4 and EN1366-3 standards.

**Application**: suitable for window setting where a clean and controlled backfill is required. Also entrance door linings and any kind of breakthrough in walls and cavities. Bond it B1 Foam has excellent noise and heat insulation values and exceeds the requirements of Construction Materials Class B1 rating in accordance with DIN 4102 pt1. For internal and external use.

# Can be used at temperatures between +50C and +250C and when cured will resist extremes of temperature from -400C to +1000C.

B1 is available as aerosol (BDEFR) or gun grade (BDEFRG). Use with BDAG1 foam gun.

Code	Size	Colour	Box
BDEFR750	750ml	Pink	12
BDEFRG750	750ml	Pink	12



#### **PROFESSIONAL AND DIY**

#### BOND IT B3 FOAM Fill & Fix PU Foam

Quick, economic and easy to apply.



Application: ideal for fitting doors and windows and for insulating pipes and filling small or irregular gaps. Our B3 foam can be cut, sawn, plastered and sealed over once cured and will improve draught and heat insulation. B3 foam is suitable for internal and external use and is available in 500ml and 750ml aerosol cans (BDFIX500 and BDFIX750) or 750ml gun grade (BDFIXG750) which is compatible with BDAG1/M, BDAK45 and BDEFA guns.

Conforms to class B3 (DIN4102: 1) for products with no fire resistant additives or properties.

Code	Size	Colour	Box
BDFIX750	750ml	Beige	12
BDFIXG750	750ml	Beige	12

#### **BOND IT MEGA FOAM** 360° Application PU Foam

A high performance, polyurethane expanding foam ideal for gun or aerosol use with patented adapter valve.

**Application**: quick and easy to apply when fitting doors and windows or when insulating pipes or filling gaps.



Mega Foam will improve draught and heat insulation and deaden noise. It is fitted with a unique valve which enables multi-directional use, so the can performs perfectly throughout 360° of rotation and, because the valve needs less propellant, the can yields up to 30% more volume than standard foams. For **internal** and **external** use.

Mega Foam can be used at temperatures between  $+5^{\circ}$ C and  $+25^{\circ}$ C and when cured will resist extremes of temperature from  $-40^{\circ}$ C to  $+100^{\circ}$ C.



Size Colour 750ml Beige

**Box** 12



Top quality metal PU foam gun. Ideal for professional use, featuring a steel ball valve and variable extrusion rate.

Also available in a 1m long model for specialist and long reach roofing applications.

Code	Size	Colour	Box
BDAG1	Universal	Silver	1



#### LEVELLING COMPOUNDS



#### BOND IT LEVELMASTER SELF-LEVELLING COMPOUND Water Based Interior Floor Levelling Compound



A chloride-free cementitious flooring compound which provides a level base for internal floors. An ideal, economical underlay for all modern floor finishes.

**Application**: Levelmaster Standard sets hard within 2-3.5 hours, depending on the temperature, and coverings may be laid after 6-8 hours. The mix is pre-blended, so all you need to do is add water. Levelmaster Standard can be applied in a single layer of up to 6mm thickness. It is designed for **interior** use only.

#### BOND IT LEVELMASTER LATEX LIQUID

A polymeric, casein-free liquid latex for use with Levelmaster Standard. The use of Levelmaster Latex Liquid will improve adhesion, flexibility and wearing properties.

Code	Size	Colour	Вох
BDH100B	10kg	Grey	1
BDH102B	20kg	Grey	1
BDH111	1 Unit	White Liquid	4

#### BOND IT AD-FLOOR PLUS Protein-Free Interior Floor Levelling Compound

A professional quality interior floor levelling compound suitable for use at thicknesses from 3mm to 50mm (10 to 60mm bulked with 3mm granite chippings).



Application: excellent levelling properties and high early strength make this compound suitable for applications up to 50mm in a single layer. Ideal for underlaying most common internal subfloors prior to the installation of floor coverings such as ceramic floor tiles, carpet, vinyl and wood flooring with a minimum levelling thickness of 3mm.

CodeSizeColourBoxBDH11020kgGrey1



High Performance Exterior Self Levelling Compound

A protein-free, premium grade cementitious floor levelling compound (water mix formulation) with high compressive strength, suitable for use at thicknesses from 2mm to 50mm.



Application: self smoothing, caseinfree and suitable for internal and external use, Levelmaster Ad-Floor is durable and hardwearing and can be used to patch repair rough concrete in domestic situations subject to foot traffic and light wheeled traffic.

Code BDH105

Size	Colour	Box
20kg	Grey	1

# **ROOFING AND BITUMINOUS PRODUCTS**

#### PLUVITEC PRATIKO MASTIC Flexible Bituminous Mastic

A flexible bituminous mastic reinforced with synthetic fibres. Pratiko Mastic has an excellent adhesion and durability on bituminous surfaces, galvanized sheets, smooth and corrugated metal sheets, concrete, fibre cement, etc. which remains constant in time.



The product has excellent resistance to aging, U.V. ray and atmospheric aggression. Pratico Mastic can also be applied at temperatures below 0°C, on slightly humid surfaces and is compatible with all types of bituminous membranes.

Code	Size	Colour	Box
316026	EU3	Black	12



# **ROOFING AND BITUMINOUS PRODUCTS**

#### **BOND IT EASISEAL PRO** One-Step Weatherproofing

Hybrid technology for use on roofs, walls and floors. A solvent-free replacement for traditional roof repair products such as bitumen based roof coatings. With high UV resistance, this does not harden under cold conditions and has a very high stability to temperature variations.



**Application**: ideal for wet room and roundwork tanking, repairing flat roofs, sloping roofs, leaking flashing, guttering, roof lights and cracked roofing panels. Coverage at a thickness of 1mm is approximately 1m<sup>2</sup> per 1.4kg.

Code	Size	Colour	Вох
BDESGR	5.5kg	Grey	1
BDESBL	5.5kg	Black	1
BDESBR	5.5kg	Brown	1
BDESGR20	20kg	Grey	1
BDESBL20	20kg	Black	1

#### **BOND IT SEALACRYL** Multi-Purpose Roof Coating membrane

A single component, UV stable, solvent-based, multi-purpose roof coating membrane. Designed to prevent the ingress of water whilst allowing any trapped moisture to escape and evaporate naturally.

Application: for the renovation of all types of roof structure and



waterproof protection of: flat and pitched roofs, corrugated asbestos, roof lights, flashings, roofing felt, gutters, slate, asphalt, lead, glasshouses.

Code	Size	Colour	Вох
SA1GR	1kg	Grey	12
SA5GR	5kg	Grey	4
SA20GR	20kg	Grey	1
SA1WH	1kg	White	12
SA5WH	5kg	White	4
SA20WH	20kg	White	1
SA1BL	1kg	Black	12
SA5BL	5kg	Black	4
SA20BL	20kg	Black	1

#### CHIPPING SOLUTION Cold Applied Bonding Solution



A ready-to-use, premium grade, cold applied bitumen solution for bonding chippings to roofs which are flat or have a low pitch (up to 10°).

Code	Size	Colour	Box
BDB023	5L	Black	4
BDB024	25L	Black	1

#### **BITUMEN PRIMER**

#### Low Viscosity, for Use on Friable Surfaces



A quality, highly penetrative bituminous solution for priming surfaces prior to the application of bituminous materials and flashing tapes.

Code	Size	Colour	Вох
BDB034	1L	Black	6
BDB019	2.5L	Black	6
BDB020	5L	Black	4
BDB029	25L	Black	1

#### BITUMEN PAINT General Purpose Waterproofing Paint



A solvent-borne, bituminous black paint for the waterproofing and weather protecting of steel work and concrete. For exterior use.

Code	Size	Colour	Box
BDB015	1L	Black	6
BDB016	2.5L	Black	6
BDB017	5L	Black	4
BDB018	25L	Black	1

#### **TROWEL MASTIC** Fibre Filled Bitumen Mastic

F	
	TROWEL
1	bre filled bitumen mastic, ideal or filling crocks and holes in streofing materials, motel and timber gutters,
	AND ADDRESS OF THE OWNER
10	00000

A multi-purpose, trowel grade material for waterproofing, stopping, bedding, pointing and sealing. It is fibre reinforced and cures to provide a strong and flexible compound.

Code	Size	Colour	Вох
BDB011	1L	Black	6
BDB012	2.5L	Black	6
BDB013	5L	Black	4



#### ALUMINIUM SOLAR REFLECTIVE PAINT **Bitumen Coating with Aluminium Pigment**



A light/heat reflective coating that will provide protection against solar degradation and heat gain. Ideal when applied over bituminous coatings, aged asphalt and primed steel.

Code	Size	Colour	Вох
BDB030	2.5L	Silver	6
BDB021	5L	Silver	4
BDB022	25L	Silver	1

#### ALL WEATHER ROOFING COMPOUND Fibrated Bitumen Coating for Year Round Application



RUBBER

100101

🐧 🕢 🔕 🖉

A general purpose, fibre reinforced waterproof coating for all common roofing surfaces, including mastic asphalt, roofing felt, corrugated iron, fibre/ cement, slates, lead, copper, tin and zinc.

Code	Size	Colour	Вох
BDB026	2.5L	Black	6
BDB027	5L	Black	4
BDB028	25L	Black	1

e	Size	Colour	Вох
026	2.5L	Black	6
027	5L	Black	4
028	25L	Black	1

#### **FELT ADHESIVE**

#### Cold Applied Roofing Felt Adhesive



A solvent-borne, heavy duty adhesive for bonding all types of bituminous roofing felts to asphalt, felt, metal and concrete. It can also be used for bonding mineral chippings to bituminous surfaces. Not to be used over tar-based products.

Code	Size	Colour	Box
BDB000	1L	Black	6
BDB001	2.5L	Black	6
BDB002	5L	Black	4
BDB003	25L	Black	1



RUBBER BITUMEN EMULSION

emulsion which dries to a tough, black coating providing an effective cold-applied, damp proof membrane in sandwich constructions. Co

Code	Size	Colour	Вох
BDB008	2.5L	Black	6
BDB009	5L	Black	4
BDB010	25L	Black	1



# **TAPES**

#### BOND IT TIGRIS SCRIM TAPE High Strength Drywall Tape



A 100% fibreglass close weave (9 x 9 per sq inch) mesh scrim tape which will not blister or bubble

Application: with a selfadhesive backing, this tape eliminates the need for preplastering, provides reinforcement and saves time and money.

Code	Size	Colour	Box
BDDJ2	2" x 90m	White	24
BDDJ3	3" x 90m	White	18
BDDJ4	4" x 90m	White	12

#### BOND IT TIGRIS MASKING TAPE Premium Grade Decorators Tape



A premium grade, buff coloured tape for masking and marking.

Application: with a selfadhesive backing, this tape eliminates the need for preplastering, provides reinforcement and saves time and money.

Code	Size	Colour	Box
BDMT25	25mm x 90m	Buff	6 x 6
BDMT38	38mm x 90m	Buff	4 x 6
BDMT48	48mm x 90m	Buff	4 x 6
BDMT75	75mm x 90m	Buff	4 x 3

#### **BOND IT TIGRIS DUCT TAPE**

Water-Resistant All-Purpose Tape



Premium quality, waterresistant duct tape. Application: perfect for binding, fixing, sealing, repairing, joining, protecting, marking and

much more

Code Size Colour Box BDDT45S 48mm x 45m Silver BDDT45BL 48mm x 45m

24 Black 24

#### **BOND IT TIGRIS FOIL TAPE**

Self-Adhesive Aluminium Tape



A heat and light reflective tape which is suitable for use with duct systems on all types of ventilation and air conditioning systems.

Application: ideal for use between foil faced insulation panels and wall applications. Tigris Foil Tape has a high tack adhesive background and provides consistent. performance over a wide range of service temperatures.

Code	Size	Colour	Box
BDAT50	50mm x 45m	Silver	24
BDAT75	50mm x 75m	Silver	16
BDAT100	50mm x 100m	Silver	12

#### **TYVEK® FLEXWRAP EZ** Airtightness & Awkward Seal Areas



Tyvek<sup>®</sup> FlexWrap tape can shape itself to create a highly effective seal for the membrane around any irregular shape or complex joint, whether around services, piping or cabling, into the corners and junctions of an aperture, around doorways, rafters, joists, etc. Tyvek® FlexWrap ensures continuity,

compatibility and integrity with all Tyvek breather membranes and creates more airtight seals compared to standard tapes used on irregular shapes/penetrations.

Comes in a width of 60mm and a roll length of 10m.

Product	Code	Size	Colour	Box
Flexwrap EZ	3739	60mm x 10m	Grey	3



BOND IT FLASHING TAPE High Performance, Waterproof, Self-Adhesive Tapes



Code Colour Size Box BDF001 10m x 50mm Grev 12 BDF002 8 10m x 75mm Grev BDF003 10m x 100mm Grev 6 BDF004 10m x 150mm Grev 4 BDF005 10m x 225mm Grey 2 BDF006 10m x 300mm Grey 2 BDF007 10m x 450mm Grev 1 BDF008 10m x 600mm Grey 1

# **LOFT LADDERS**

# LOFT LADDERS WITH POLAR EXTREME INSULATION

#### POLAR EXTREME AIRTIGHT LOFT LADDER Wooden Loft Ladder with Extreme Insulation

Insulation thicknesses up to 247 mm and U-values up to 0.14 W/m<sup>2</sup>K are a contribution to low energy consumption in your home.

#### COMPLETE LOFT LADDER

#### Insulated Loft Ladder with Wooden Frame

Cold and heat have no chance to reach the lower floor. The proof for this are the ongoing developments of our loft ladders. An optimal, seamless gasket ensures that you can enjoy a pleasant room climate even on very icy days and save heating costs at the same time.

#### **FIRE PROTECT LOFT LADDER** A Wooden Loft Ladder with Fire Retardant Finish

Extremely fire resistant loft ladder with 60 mm thick insulation cover and air tightness class 4. Tested to EN1363, EN1634, B3860.

#### **ADVANTAGES**

- Extra thick insulated hatch
- No joints on all around seal
- Strong solid wooden frame
- Special strong steps
- Steel safety handrail
- Equipped with stair shoes
- Complete assembled ready to be built in
- Holds weight 150 kg

		-
Product	Code	Pallet
Complete Loft Ladder 1200x550	504802	16
Complete Loft Ladder 1200x600	504801	16
Complete Loft Ladder 1200x700	504803	16
Polar Extreme Loft Ladder 1200x550	10651	12
Polar Extreme Loft Ladder 1200x600	10653	12
Polar Extreme Loft Ladder 1200x700	10654	12
Fire Protect Loft Ladder 1200x600	504810	12
Extension Kit	504806	20
		R. W.








# **ROOFING PRODUCTS**

Laydex Roofing Division supply the most comprehensive range of waterproofing systems in Ireland for Commercial, Industrial and Domestic projects.

Representing many of the world's foremost manufacturers of PVC, Single Ply, Bituminous, Liquid and metal roof materials, Laydex Roofing work with industry renowned architectural practices on flagship construction projects throughout Ireland on a daily basis.

In conjunction with industry leading manufacturers such as Pluvitec, Renolit, RESITRIX<sup>®</sup>, Kemper and Index, we provide the Project Specifier and the Roofing Contractor with high quality waterproofing solutions alongside extensive technical support ranging from on-site roofing surveys to project specific full build up specification generation.

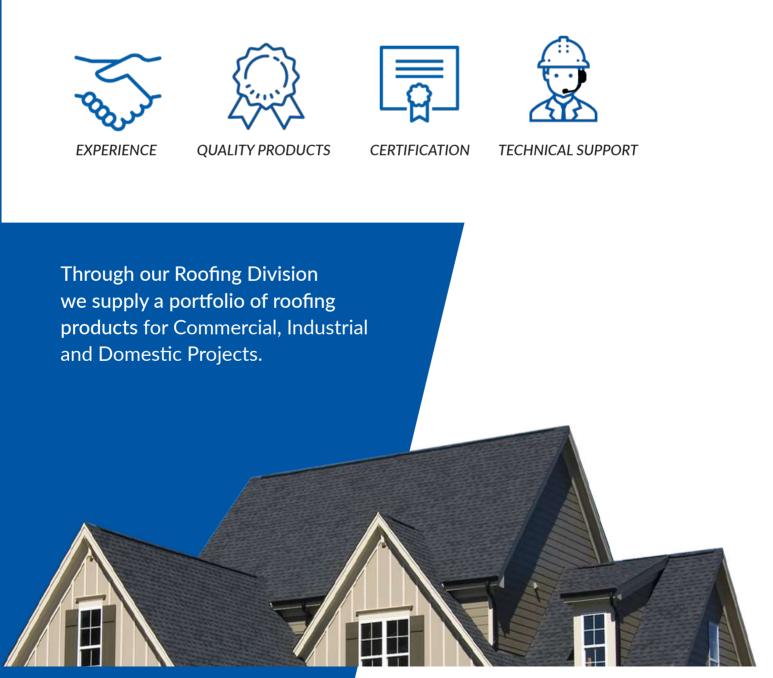







SINGLE PLY ROOFING MEMBRANES












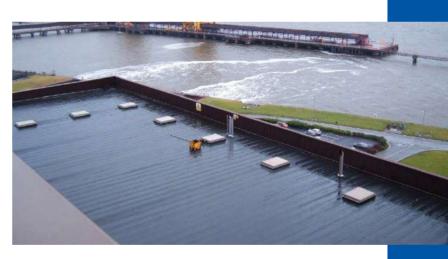







# **BITUMINOUS MEMBRANE ROOFING SYSTEMS**

#### PLUVITEC APP BITUMINOUS ROOFING SYSTEMS

#### PLUVITEC PLURA R RE-ROOF (BLACK & BRILLIANT BLACK)



Mineral Finished Composite Bituminous Waterproofing Membrane

Quite simply the best roofing felt on the market! Plura R Re-roof is a composite APP bituminous waterproofing membrane predominantly used on refurbishment projects.

The upper face provides high heat resistance and cold flexibility, while the lower face gives unrivalled adhesion and workability with a wide variety types of substrates. Fully compatible with all PLUVITEC membranes, both APP and SBS.

#### PLUVITEC SPECIALTEC P 3 MM Modified APP Waterproofing Membrane



Pluvitec Specialtec is an APP modified bituminous waterproofing membrane with both composite polyester and fibreglass reinforcements providing both good mechanical characteristics and excellent dimensional stability.

Specialtec P 3mm is the underlay in our fully Pluvitec warranty backed build up.

#### PLUVITEC TECH 500 SBS Waterproofing Membrane (-15°C)



Pre-fabricated waterproofing membrane made of distilled bitumen and elastomeric polymers (SBS).

The versions P and PA have a woven non woven single strand composite polyester reinforcement, with good mechanical characteristics and excellent dimensional stability. The versions PA are self-protected on

the upper face with mineral slates which reduce superficial heat absorption improving the durability of the membrane. The self-protected versions have a side selvedge of 10 cm and upon request a head selvedge of 15 cm, to improve adhesion between the sheets.

Product	Code	Size	Colour	Pallet
Plura R Re-Roof	510764	8m x 1m	Black	25
Supertec P 4mm	510777	8m x 1m	Talc	30
Supertec P 4mm	510772	8m x 1m	Green	25
Specialtec P 3mm	510755	10m x 1m	Talc	30
Tech 500	510649	8m x 1m	Black	25
Maxitec Anti-Root 4mm	510774	10m x 1m	Talc	24

#### PLUVITEC SUPERTEC P & MINERAL PA 4 MM

APP Modified Waterproofing Membrane



Pluvitec Supertec P/PA is an APP modified bituminous waterproofing membrane with a single strand composite spunbond polyester fabric providing both excellent mechanical characteristics as well as excellent dimensional stability.

Pluvitec Supertec P 4mm, PA 4mm and PA 4.5kg/m2 are certified by the NSAI under

Irish Agrément certificate number 07/0294. Pluvitec Supertec is the capsheet in the Pluvitec 20 Year Warranty system.

#### PLUVITEC MAXITEC ANTI-ROOT High Resistance Membrane



Pre-fabricated membrane designed for use on structures where vegetation is foreseen (ex. roof gardens, buried works, etc.). The excellent and long lasting performance of Maxitec Anti-Root are given by the sum of the characteristics which provide a very high resistance to both root penetration as well as aggressive chemicals such as fertilizers.



# ROOFING PRODUCTS | BITUMINOUS MEMBRANE ROOFING SYSTEMS | INDEX SBS SYSTEMS ACCESSORIES

#### INDEX SBS BITUMINOUS ROOFING SYSTEMS



#### **INDEX SELFTENE SELF-ADHESIVE MEMBRANE** No Need for Hot Bitumen, Flames or Adhesives


INDEX SELFTENE is a self-adhesive polymer modified bituminous vapour barrier onto which the insulating panels can be glued by simple cold pressure without the need for hot bitumen, flames or adhesives.

Product	Code	Size	Colour	Box
INDEX Self-Adhesive Membrane	510440	1m x 10m	Black	30
INDEX Self-Adhesive Capsheet	510442	1m x 10m	Grey-Green	27

#### **BITUMINOUS ACCESSORIES**

#### **PROTECTION BOARD**

Pre-Formed Bituminous Board



Pluvitec Protection Board is a pre-formed bituminous board modified with a special rigid compound. It is used to protect the waterproofing during backfilling procedures (retaining walls, fixed pavements, cast concrete, etc.) and construction traffic.

Also available with mineral slate finish, used as a protective walkway to waterproofing layer on roofs. Pluvitec Protection Board is used also for refurbishment works, as a new supporting element (6 mm version), mechanically fixed.

Code	Size	Colour	Box
510752	6mm x 1m x 2m	Black	135

#### PLUVITEC PRE-FORMED CORNERS AND OUTLETS

Reliable and Economical Polymer Bitumen Corners



The pre-formed polymer bitumen corners and drain outlets are manufactured to be reliable and economical but above all 100% compatible with the torch on membranes.

#### PLUVITEC TPE ANGULAR DRAIN Provided With a 500mm Long Drain Spigot



The angular roof drain with round exit spigot is provided with a 500mm long drain spigot which could be easily made longer simply by using a standard plastic pipe.

Code	Descri
510501	Internal
510502	Externa
001709	100mm 500mm

Description	
Internal Corner	
External Corner	
100mm Angle for Felt	
500mm Spigot (Round)	

Colour	Вох
Black	20

CHECK OUT OUR RANGE OF ROOFING AND BITUMINOUS CHEMICALS Pages 50 and 51

57

# SINGLE PLY PVC MEMBRANES



#### ADHERED

5 /1. / /8

#### **RENOLIT ALKORPLAN A** Laminated Fleece-Backed Membrane



A calendered and laminated fleece-backed membrane of flexible PVC for use in the Alkor Adhered system.

Adhering offers benefits of non-penetration to the deck surface and in situations where mechanical fixing would be more difficult. Ideal over swimming pools and accommodation.

#### **MECHANICALLY FIXED**

#### **RENOLIT ALKORPLAN F** Thermoplastic PVC-P Roofing Membrane



A calendered and laminated membrane of flexible PVC and polyester reinforcing for use in the Alkor mechanically fixed system. Mechanical fixing offers the benefits of less interruption during periods of inclement weather, a designed value for wind load and speed of installation.

#### LOOSE LAID

#### **RENOLIT ALKORPLAN L**

Thermoplastic Membrane Based on Monomeric PVC-P



Renolit Alkorplan L is a thermoplastic membrane based on monomeric PVC-P. It can be installed on flat, pitched and barrel vaulted roofs due to its flexibility and aesthetic qualities.

#### STANDING SEAM EFFECT

#### RENOLIT ALKORDESIGN PROFILE SYSTEM

Installed Without Use of a Naked Flame





Renolit Alkordesign combines the aesthetic appearance of a metal standing seam (lead, zinc, copper or aluminium) with the benefits of a pliable synthetic roof through the application of a purpose made extruded profile.

#### WALKWAYS

#### **RENOLIT ALKORPLAN WALKWAY**

Waterproof Membrane





The Renolit Alkorplan Walkway is a waterproof membrane used for maintenance, access and emergency routes. It is laminated with flexible PVC and has a woven polyester reinforcement.







#### SOLAR FASTENING SYSTEMS

#### RENOLIT ALKORSOLAR SUPPORT SYSTEM

Ultra Light Fixing System for Single Ply Membranes

The unique Renolit Alkorsolar System has brought a step change to the way in which photovoltaics are fixed to single ply membrane. A simple solution, the PVC profile and aluminium box section combination hot air welded to the surface of the membrane provides a solid mounting for all types of PV systems, both solar and thermal. The Renolit Alkorsolar System can be used on existing or new PVC or EVA/EBA roofing membranes.



#### ACCESSORIES

#### **GRP ROOF TRIM** Flat Roof Perimeter Detailer



Easy fit roof trims are designed to simplify and improve edge detail work on flat roofs. Once installed they will secure the membrane to the roof edge and improve the overall appearance of the roof.

The trims provide secure flat roof perimeter detailing that enhances the look of the property and blend attractively with the UPVC gutters and fascia.



#### **RENOLIT ALKORSEAL SILICONE** Flat Roof Perimeter Detailer



Renolit Alkorseal is a high quality construction grade formulation designed to complement the durability of the Renolit waterproofing system. It is the only product recommended for use on interfaces between Renolit Alkorplan and other materials. Renolit Alkorseal is a one part low modulus neutral cure silicone sealant fully tested for use with Renolit Alkorplan single ply membrane.

#### RENOLIT ALKOR SEAM SEALER

Reinforcement of welded joints, T borders and corners for Renolit Alkorplan waterproofing membranes.

#### **RENOLIT ALKOR CLEANER**

Renolit Alkor Ethyl Acetate Cleaner is suitable for cleaning the welding area and the removal of stains (bituminous products, adhesive residue).

#### **RENOLIT THF WELDING FLUID**

Cold solvent welding.

# THE ONLY SINGLE PLY WATERPROOFING MEMBRANE WITH CERTIFIED LIFE OF 40 YEARS

# **RENOLIT** ALKORPLAN



RENOLIT

Rely on it.

# SINGLE PLY RESITRIX HYBRID MEMBRANES

### FULLY BONDED MEMBRANE

#### **RESITRIX<sup>®</sup> SK W BLACK FULL BOND** Fully Self-Adhesive & Root Resistant for Living Roofs



RESITRIX® SK W Full Bond is a heat weldable and glassreinforced, composite rubber membrane with an EPDM core. RESITRIX® SK W Full Bond is root resistant according to DIN EN 13948 and carries FLL-Test certificate. Thus RESITRIX® SK W Full Bond can be installed in a variety of applications, either fully exposed, for fully

bonded systems or beneath roof gardens (intensive, extensive or biodiverse greenery) and living roof systems of any kind and to create "living on the roof" areas.

#### RESITRIX<sup>®</sup> SR

Grey and Self-Adhesive with Reflective Properties



RESITRIX<sup>®</sup> SR is a light grey coloured, self-adhesive, hot-air weldable EPDM aterproofing membrane.

Due to the grey colour, RESITRIX<sup>®</sup> SR offers new aesthetic design options and additionally has solar reflective properties. The Solar Reflective Membrane belos to reduce

Membrane helps to reduce the surface temperature in

strong sunlight and thereby protects the building interior from excessive heat build-up. RESITRIX® SR is 100% leak-tight welded seam with a simple visual inspection.

#### PARTIAL BOND MEMBRANE

#### **RESITRIX® SK BLACK PARTIAL BOND** Partially Self-Adhesive – The 3-in-1 Waterproofing

Membrane



RESITRIX<sup>®</sup> SK Partial Bond is a partially self-adhesive, heat-weldable EPDM waterproofing membrane that allows permanent dissipation and equalisation of pressure. It is therefore particularly advantageous for substrates that are prone to movement or which contain residual moisture

Consequently, this product is particularly suitable for installations in the refurbishments area.

Permanently FLEXIBLE and highly RESISTANT to ozone, UV and infrared radiation and the effects of weather due to the cross-linked MOLECULAR STRUCTURE of RESITRIX® Membrane.

#### PRIMER

#### **RESITRIX® FG35 PRIMER** Quick-Drying Ready-to-Use Solvent Primer



FG 35 is a quick-drying, ready-to-use, solvent primer consisting of synthetic rubber and resins. With a drying time of just 35 minutes FG 35 is still unbeaten.

The Surface Primer FG 35 is used in combination with the self-adhesive RESITRIX® Waterproofing Membranes on a wide range of substrates.



#### **ACCESSORIES**

#### **RESIFLEX® SK EXPANSION STRIPS**

Joint Sealing Strips



#### RESIFLEX<sup>®</sup> SK is used for waterproofing expansion joints and construction joints on trafficked and non-trafficked roofs as well as for waterproofing below-ground structures. RESIFLEX<sup>®</sup> SK is also suitable for horizontal to vertical connections.

#### **RESITRIX® CORNER PARTS** Joint Sealing Strips



When installing RESITRIX® Waterproofing Membranes, corners are formed using two-dimensional prefabricated corner pieces made from RESITRIX® SK W Full Bond. This method enables quick and convenient formation of internal and external corners.

#### RESITRIX® PIPE PENETRATION SLEEVES

Moulded Sleeves



The RESITRIX<sup>®</sup> Pipe Penetration Sleeves are prefabricated, moulded sleeves with a weldable RESITRIX<sup>®</sup> Sealing Flange, for sealing round roof penetrations with diameters between 35-100mm.

#### **RESITRIX® BLIFIX** Lightning Conductor System



BLIFIX<sup>®</sup> is a Mounting System for routing and attaching lightning conductor rods with a max. diameter of 10 mm onto flat roof constructions.

#### **RESITRIX® SCISSORS** Scissors that Provide Optimal Flexibility



Particularly due to their sharpness, RESITRIX® Scissors provide optimal flexibility and allows for clean and accurate installation of RESITRIX® Waterproofing Membranes.



# LIFE EXPECTANCY OF OVER 50 YEARS NO FIRE ON THE ROOF NO FIRE ON THE ROOF IO0% WELDED SEAM

Product	Code	Size	Box/ Pallet
RESITRIX SR GREY	1400	10m x 1m x 2.5mm	20
RESITRIX SK Partial Bond Black	1410	10m x 1m x 2.5mm	20
ESITRIX SK W Full Bond Black	1403	10m x 1m x 2.5mm	20
ESITRIX FG35 PRIMER 12.5kg	1401	12.5kg	33
ESITRIX FG35 PRIMER 4.5kg	1402	4.5kg	60
RESITRIX FG35 PRIMER Spray Cannister	1420	14.4kg	-
ESITRIX FG35 PRIMER Spray Gun	1421	-	-
ESITRIX FG35 PRIMER Spray Hose	1422	-	-
ESITRIX Round Patches	1404	-	-
SITRIX Kidney Patches	1405	-	-
SITRIX Roofdrain Outlet	1406	110/125mm	-
ESITRIX Kerb Trim	1407	2.5m	6
ESITRIX Drip Edge Trim	1408	2.5m	-
ESITRIX External Kerb Corner Charcoal	1409	-	-
ESITRIX Lightening Clips	1424	-	50/box
ESITRIX Roofdrain	1426	90/100mm / 215m	-
ESITRIX Chute Outlet	1428	60 x 100 / 450mm	90
RESITRIX Scissors	255030	-	-



Ideal Solution for Façade Applications



With Hertalan EPDM strips you opt for quality, flexibility and convenience. You can work on virtually any substrate. That makes Hertalan EPDM strips the ideal solution for Damp Proof Course applications in cavity walls, around window frames and in curtain walls.

#### HERTALAN FS14 ADHESIVE PASTE

High-Quality Adhesive Glue for Façade Application



Hertalan FS14 is a highquality adhesive glue for façade application. This sealant can be used on both horizontal and vertical surfaces. Coverage approx. 7 linear metres for a cartridge (pea sized bead).



CARLISLE

#### HERTALAN KS137 CONTACT ADHESIVE Specially for Adhering EPDM Membranes

**EPDM** 

A ready-for-use contact adhesive which has been developed especially for adhering EPDM membranes both vertically and horizontally onto surfaces such as wood, bitumen, masonry material, lead and suitable faced rigid thermal insulation boards, etc.

Product	Code	Size	Pallet	
EPDM 1400	1412	1400mm x 25m	44	
EPDM 450	1423	450mm x 20m	-	
EDPM 400	1413	400mm x 20m	-	
EPDM 300	1414	300mm x 20m	-	
EPDM 200	1415	200mm x 20m	-	
EPDM 150	1416	150mm x 20m	-	
FS14 EPDM Adhesive Paste	1418	600cc	12/box	
KS137 EPDM Contact Adhesive	1417	5.3kg	-	
* further sizes available on request				



HERTALAN EPDM FAÇADE MEMBRANES

62

# **ROOF COATINGS**







#### LIQUIFLEX-PRO<sup>®</sup>

#### High performance polyurethane membrane used for waterproofing.

LIQUIFLEX-PRO $^{\rm \circledast}$  is BBA certified for 25 years and is available in 15, 20 and 25 year warm and cold roof systems.

#### **APPLICATION OF LIQUIFLEX-PRO®**

# Installers prefer LIQUIFLEX-PRO® because it is extremely convenient. It is a single liquid product, which keeps waste at a minimum.

LIQUIFLEX-PRO® is a wet-on-wet system, meaning the basic 15 year system can be installed without waiting on build up layers curing. The main system has a fast fume dissipation rate, but we also offer a low-odour eco version of the system, making it even safer to work with on occupied buildings.

#### LIQUIFLEX-PRO® can be applied to the following surfaces:

- Refurbishment
- New Build
- Built-up or Overlay
- Ballasted Roofs
- Green Roofs
- Asbestos Encapsulation
- Metal Roof Refurbishment
- Gutter Linings
- ...and much more.

#### BENEFITS

LIQUIFLEX-PRO® is designed with primers already blended into the membrane and does not require an accelerator or catalyst to cure the membrane. It is BBA Certified for life in excess of 25 years.



IN EXCESS OF 25 YEARS



COLD LIQUID APPLIED

STRAIGHT OUT THE TIN





 $\mathbf{r}$ 

EXCELLENT ADHESION TO MOST ROOF SUBSTRATES





# **ROOF SLATES**

#### TAPCO SYNTHETIC ROOF SLATES Extremely Durable BBA Approved Roof Slate



For centuries, slate roofing has been desired for its durability and beauty.

With authentic surfaces and edges, Tapco Slate highlights the handsome character of slate, at the same time enhancing roof performance through innovative design

Unlike natural slate, Tapco Slate won't break or elaminate and comes with a 40-year Warranty.

Product
Slate Pewter/Steel
Slate Plum
Tapco Ridge Cap Plum
Tapco Ridge Cap Pewter

Code	Colour	Pallet
670000	Pewter/Steel	1600
670001	Plum	1600
670021	Plum	100
670020	Pewter/Grey	100



# **HIGH PERFORMANCE VAPOUR BARRIERS**

#### **ALUTRIX® 600 ALUMINIUM VAPOUR BARRIER** High Performance Self-Adhesive, Cold Applied **Aluminium Vapour Barrier**

ALUTRIX<sup>®</sup> 600 Self-Adhesive Vapour Barrier is used in a wide variety of applications in the building industry. It is suitable for all internal conditions, including very high humidity.

ALUTRIX® 600 Vapour Barrier is particularly advantageous for use on profiled metal decking. The Vapour Barrier is quick to install and creates an airtight and vapour-tight seal (sd-value > 1,500 m) in accordance with Energy Conservation Regulations.

Achieves a Class O fire rating to BS 476 Part 6.

Size: 1.08m x 30m

#### **ALUTRIX® FR ALUMINIUM VAPOUR BARRIER** High Performance Self-Adhesive, Cold Applied Aluminium Vapour Barrier

ALUTRIX® FR Self-Adhesive Vapour Barrier consist a reinforced composite aluminium foil. It is used in a wide variety of applications in the building industry. Suitable for all internal conditions, including areas with very high humidity.

ALUTRIX® FR consists of a reinforced composite aluminium foil with a tenacious self-adhesive backing and removable release film. ALUTRIX® FR Vapour Barrier is particularly advantageous for use on profiled metal decking.

Size: 1.08m x 30m

Both Vapour Barriers have a very high tear resistance and can withstand foot traficking on profiled metal decking, without puncturing.






# INSULATION

#### **BITUMINOUS FACED**

#### KINGSPAN TR24

**Rigid Thermostat Insulation Core** 

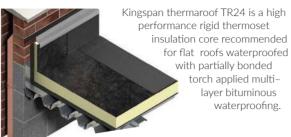


#### FOIL FACED

#### KINGSPAN TR26 Insulation Core Faced on Both Sides



#### XTRATHERM FR BGM

Fleece Finished Insulation Board



Xtratherm FR/ BGM is a high performance, fleece finished insulation board for partially or fully bonded, torched-on, builtup bituminous felt systems.

#### **XTRATHERM FR ALU** Insulation Board with Vapour-Tight Aluminium Foil



Xtratherm FR/ALU is a high performance flat roof insulation board with vapourtight aluminium foil facings suitable for use with single ply membranes.

#### **TISSUE FACED**

KINGSPAN TR27 Insulation Core

#### Thermaroof TR27 LPC/FM is a high performance insulation core for flat roofs waterproofed with fully adhered single-ply, partially bonded built-up felt, mastic asphalt and cold liquid applied waterproofing.

#### XTRATHERM FR MG Insulation Board



Xtratherm FR/MG is a high performance insulation board suitable for use below single ply fully adhered roof membranes, single ply waterproofing systems and partially bonded built-up felt.

TRA-STI

\* Tapered insulation schemes also available on request

#### **INSULATION ADHESIVE**

#### XTRA-STIK INSULATION ADHESIVE Moisture-Curing Polyurethane (MCPU) Canister Adhesive

XTRA-Stik Moisture-Curing Polyurethane (MCPU) Canister Adhesive allows your contractor to apply insulation adhesive precisely and quickly.

XTRA-Stik minimise time onsite; it is 5 x faster to apply than a standard hand-poured bead-applied MCPU adhesive due to the pressurised canister system. XTRA-Stik covers up to one square metre of insulation board in as little as 2-3 seconds, whereas it can take up to 10 seconds with a standard adhesive. XTRA-Stik cures much faster than a standard adhesive; in as little as 15 minutes in comparison to 30 minutes.

#### Approx. Coverage 150m<sup>2</sup> per Unit!

# ROOFING PRODUCTS | INSULATION | BITUMINOUS FACED, FOIL FACED, TISSUE FACED

# COLD APPLIED LIQUID WATERPROOFING SYSTEMS

#### RUBBER-X UNIVERSAL REPAIR AND PROTECT SYSTEM

#### RUBBER-X HB S-200 SEALANT

Universal Sealant



Rubber-X can be used for waterproofing, air barrier and protection against corrosion.

The coating adheres to most surfaces, including concrete, stone, metal, bitumen, EPDM, wood, PVC and zinc.

Rubber-X has resistance against all weather conditions, UV and chemicals, ensuring that the product is highly durable.

#### **RUBBER-X JOINT FILLER** Cold Applied, Single Component Filler



Rubber-X Joint Filler is a cold applied, single component filler that is suitable for many different applications.

The product technology of the Rubber-X Joint Filler offers a VOC free, strong, highly flexible (700%) product with an outstanding adhesion on many surfaces.

Can be used for waterproofing and as an air barrier. The product adheres to almost every surface.

#### **RUBBER-X SPRAY GRADE** For Waterproofing and Protecting Surfaces

Rubber-X Spray Grade is a two-component spray applied system and is applied with a spray system that is specially made by Rubber-X.

Rubber-X Spray Grade is highly flexible (900%) and adheres fully to for instance bitumen, EPDM, wood, metal, concrete, PVC and many insulation materials.

Because the product is fully adhered to the surface, there is never the possibility that water will transport underneath the Rubber-X membrane.

Product	Code	Size	Pallet
HBS-200 1L	SEALROOF-HB1	1L	-
HBS-200 5L	SEALROOF-HB5	5L	-
HBS-200 20L	SEALROOF-HB20	20L	-
HBS-200 205L Spray Grade	SEALROOF-HB205SG	205L	-
HBS Joint Filler	SEALROOF-JF	310ml	12/box



#### **KEMPEROL LIQUID WATERPROOFING SYSTEM**

#### **KEMPEROL® 1K-SF** Solvent-Free and Single-Component

The single-component waterproofing system is based on a silane-terminated polyurethane polymer and is rainproof after just 2 hours.



KEMPEROL® 1K-SF is equally suitable for all architectural details such as surface waterproofing on flat roofs, balconies or patios, etc. KEMPEROL® 1K-SF is particularly effective and efficient on smaller surfaces.

#### **KEMPERTEC® PRIMER** Quick-Curing, High Bonding Primer



Kempertec® Primer is a quick-curing, high bonding polymethyl methacrylate (pmma) primer used between acceptable prepared substrates and Kemperol cold liquid-applied reinforced membrane and coating systems. Kempertec Primer is used to prime a variety of substrates.

#### **KEMPEROL® REINFORCEMENT FLEECE** Improves Tear Strength and Puncture Resistance



Kemperol<sup>®</sup> Fleece improves tear strength and puncture resistance while maintaining membrane uniformity.

Kemperol<sup>®</sup> Fleece is used with Kemperol<sup>®</sup> cold liquid-applied waterproofing system.

#### **KEMPEROL® 2K-PUR** Solvent-Free based on Polyurethane Resin



Kemperol 2K-PUR is a solvent-free, fleece-reinforced and liquid-applied waterproofing system based on polyurethane resin. The odor-free product can be used universally on roof decks, roof gardens, plazas, balconies, terraces and also for indoor areas such as bathrooms, catering kitchens and plant rooms.

#### KEMPEROL® V210M

Waterproof in a Single Process Application

Kemperol V210M adapts to a structure like a second skin and offers long-term protection down to the last detail – roof



parapets, sky lights, ventilation pipes, metal supports and lightning protection rods are integrated in the surface waterproofing without any seams or joints.

In addition to flat roofs, the system is widely used in other difficult waterproofing applications – on planters, gutters and flashings.



# **STANDING SEAM SYSTEMS**

#### FLEXIBLE STANDING SEAM SYSTEM

#### ASH & LACY ASHZIP SYSTEM Roofing and Cladding System



A superior quality raised standing seam roofing and cladding system that enhances aesthetics and provides a weather tight joint above rainwater flow. The perfect choice for an exceptionally wide range of new build, refurbishment roofing and vertical facade

applications. From residential, industrial, commercial and public projects to modular new build.

# STANDING SEAM SYSTEM

#### TATA STEEL COLORCOAT URBAN





The Colorcoat Urban<sup>®</sup> standing seam system is designed for roofs and walls.

The system includes the innovative Urban Seam® profile, ideal for houses, apartments, public and commercial buildings, schools and sports pavilions. Its inherent light weight and strength make it ideal for

new build, refurbishment, temporary buildings and over-roofing applications.



67



# **GREEN ROOF SYSTEMS**

#### **BITUMINOUS MEMBRANE**

#### PLUVITEC MAXITEC ANTI-ROOT

**High Resistance Membrane** 



Pre-fabricated membrane designed for use on structures where vegetation is foreseen (ex. roof gardens, buried works, etc.). The excellent and long lasting performance of Maxitec Anti-Root are given by the sum of the characteristics which provide a very high resistance to both root penetration as well as aggressive chemicals such as fertilizers.



#### **PVC MEMBRANE**

# **RENOLIT ALKORPLAN LA**



Green roofs are not just another trend. The tendency towards green roofs has increased remarkably over the last 20 years.

With the Renolit Alkorplan LA membrane, Renolit has proved to be competitive having completed various green roof projects over many years.

PVC Membrane for Green Roofs



#### SINGLE PLY HYBRID MEMBRANE

#### **RESITRIX® SK W BLACK FULL BOND**

Fully Self-Adhesive and Root Resistant for Living Roofs of Any Kind




RESITRIX<sup>®</sup> SK W Full Bond is a heat weldable and glassreinforced, composite rubber membrane with an EPDM core.

RESITRIX<sup>®</sup> SK W Full Bond is root resistant according to DIN EN 13948 and carries FLL-Test certificate. Thus RESITRIX® SK W Full Bond can be installed in a variety of applications, either fully exposed, for fully bonded systems or beneath roof gardens (intensive, extensive or biodiverse

greenery) and living roof systems of any kind and to create "living on the roof" areas.





# **ARTIFICIAL GRASS**



More information about SAGE Artificial Grass on page 21



& PET F





TOINS

# **FLOORING PRODUCTS**

Laydex Flooring Division is unique in that we supply the most comprehensive range of floor coverings, sub-floor preparation and accessory materials available from any one provider.

When architects or specialist contractors are deciding upon a floor covering they must also consider the quality and compatibility of the materials used in the whole build up.

With this in mind, Laydex Flooring provide on-site consultations, technical specifications, product compatibility assurance, and after-sales support at any stage of the project.

Healthcare, Commercial, Retail and Education are just a few of the sectors where we supply a full drawn up specification of our compatible flooring products.

Through our Flooring Division we supply a vast portfolio of flooring products to Contractors and Architects.











HETEROGENOUS VINYL FLOORS & CARPET TILES



**RESIN FLOORINGS & WALLS** 



WIDE RANGE OF RUBBER FLOORING



ACOUSTIC & VIBRATION INSULATION



HIGH QUALITY SUBFLOOR SOLUTIONS



SPORT FLOORING & ELASTIC LAYERS



DECORATIVE MINERAL COATINGS



INNOVATIVE PREMIUM CARPETS





# **COMMERCIAL HETEROGENOUS VINYL**

IVC Contract Floors are made to the highest standards, ensuring a commercial-rated vinyl floor with excellent and consistent characteristics. IVC Contract Floors only produces heterogeneous vinyl flooring.

Made of layers, this construction method allows IVC Contract Floors to control individual aspects that can affect performance areas including slip-resistance, acoustics and wear. It also allows the creation of incredibly realistic wood and other effects thanks to the use of high-quality printed decor layers.

All designs are exclusive to IVC Contract Floors.

#### **Decorative Flooring**

All IVC Decorative Flooring is manufactured according to ISO



1. Hyperguard+ PUR Layer Easier cleaning and reduced scuff and dirt adherence 2. Wear Laver High performance for high-wear applications 3. Decor Layer Exclusive designs with incredible realism 4. Insulation Layer Provides acoustic absorption and ease of installation 5. High-Density Backing Adds stability and contributes to insulative properties

#### **IVC CONCEPT 70**

COMPACT FLOORING


Wear Layer: 0.70mm Total Thickness: 2.00mm Hyperguard+ Sanitec Size: 2/4m Class 34 Commercial; Very Heavy Class 43 Light Industrial; Heavy

#### **IVC TIRRENO 70** COMPACT FLOORING

Wear Layer: 0.70mm Total Thickness: 2.00mm Hyperguard+ **Decorative Chips** Size: 2/4m Class 34 Commercial; Very Heavy Class 43 Light Industrial Heavy

#### Acoustic Flooring

All IVC Acoustic Flooring is manufactured according to ISO 11638 Acoustic



1. Hyperguard+ PUR Layer Easier cleaning and reduced scuff and dirt adherence 2. Wear Laver High performance for high-wear applications 3. Decor Layer Exclusive designs with incredible realism 4. Insulation Layer Provides acoustic absorption and ease of installation 5. High-Density Backing Adds stability and contributes to insulative properties

#### **IVC OPTIMIZE 70**

ACOUSTIC FLOORING


Wear Layer: 0.70mm Total Thickness: 3.40mm Hyperguard+, Sanitec 19dB Sound Reduction Size: 2m Class 34 Commercial; Very Heavy Class 42 Industrial; General

#### **IVC SILENTO 50** ACOUSTIC FLOORING

Wear Layer: 0.50mm Total Thickness: 3.00mm Hyperguard+ 18dB Sound Reduction Size: 2/4m Class 23 Domestic; Heavy Class 33 Commercial; Heavy

#### Safety Flooring

All IVC Safety Flooring is manufactured according to ISO 10582, EN 13845 Safety



1. Hyperguard+ PUR Layer Easier cleaning and reduced scuff and dirt adherence 2. Wear Layer with Chips Provides slip resistance for high wear applications 3. Decor Layer Exclusive designs with incredible realism 4. Insulation Layer Provides comfort absorption and ease of installation 5. High-Density Backing


Adds stability and contributes to insulative properties

#### **IVC ISAFE 70**


SAFETY FLOORING EN 13845


Wear Layer: 0.70mm Total Thickness: 2.00mm Hyperguard+, Sanitec R11 Slip Resistance Size: 2/4m Class 33 Commercial; Heavy Class 43 Industrial; Heavy

**F** 

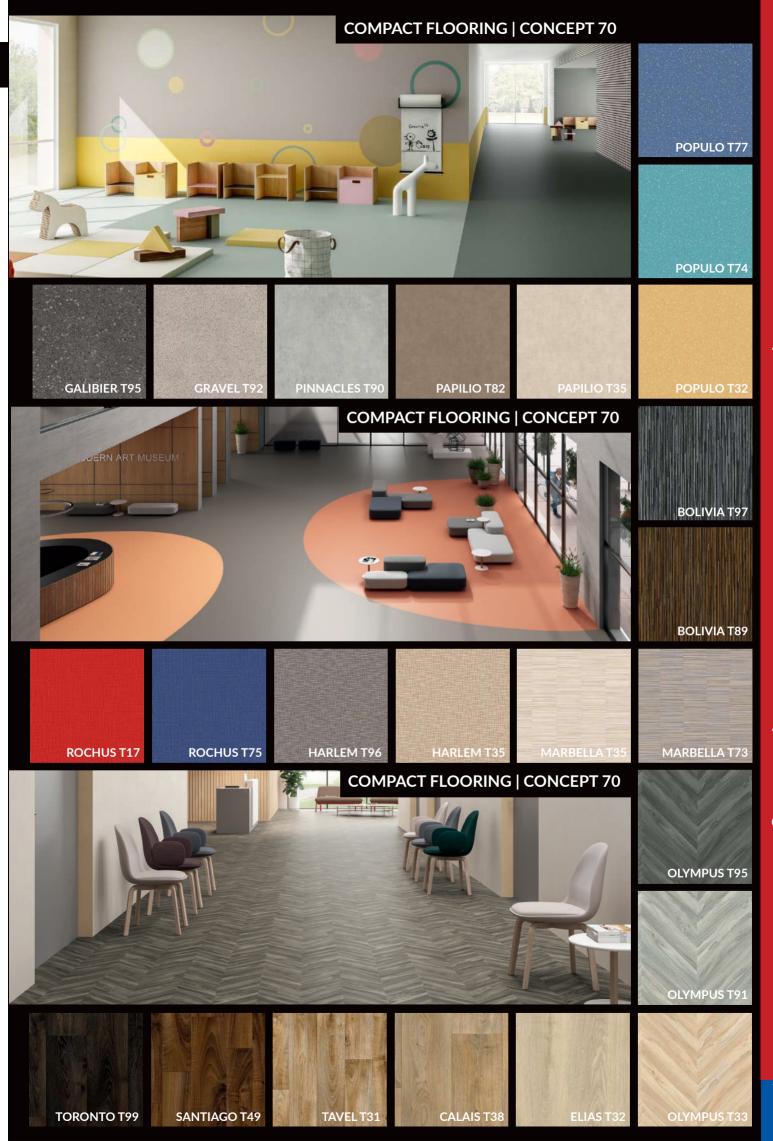

FLOORING PRODUCTS | COMMERCIAL HETEROGENOUS VINYL - Compact Flooring - IVC

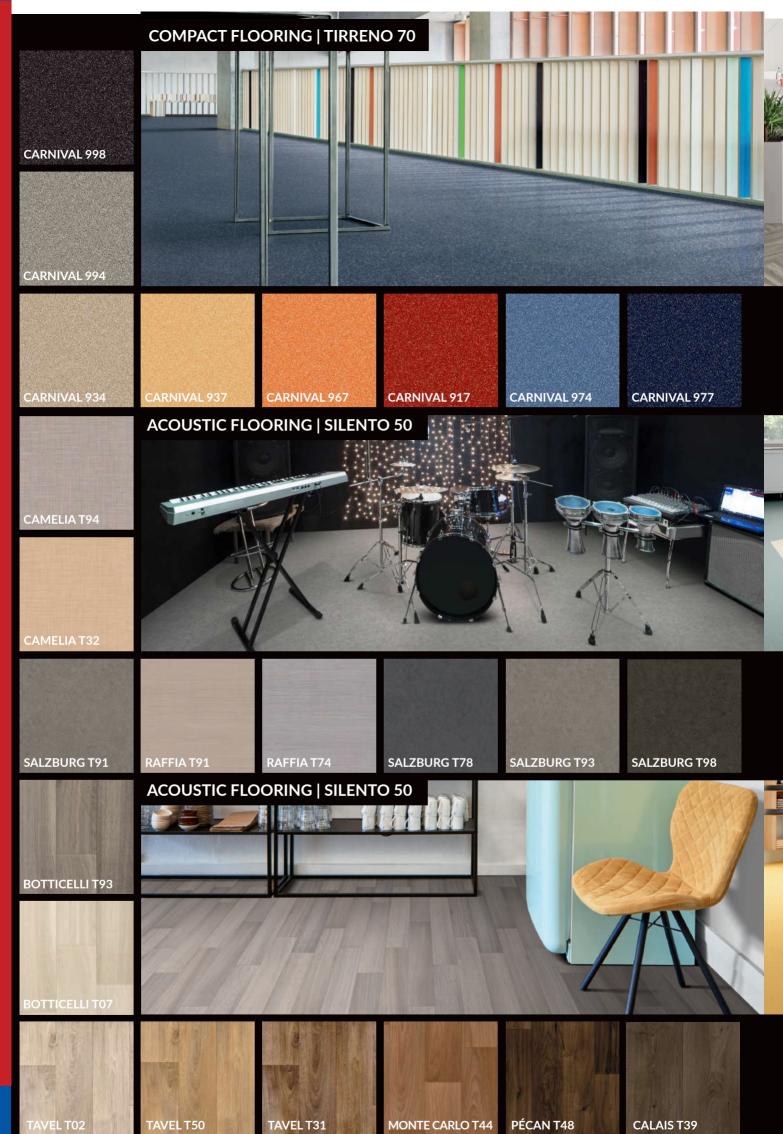

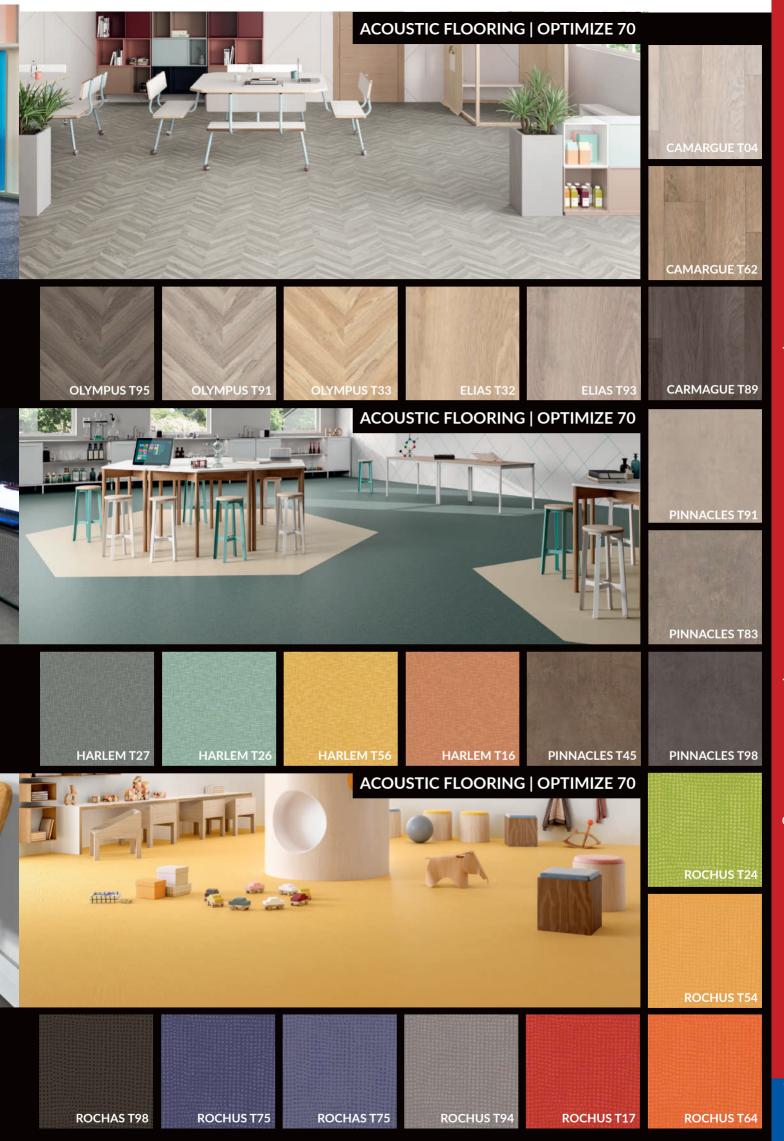





<b>Technical Specification</b>	Concept 70	Tirreno 70	Optimise 70	Silento 50	lsafe 70
Flooring Type	Compact Flooring	Compact Flooring	Acoustic Flooring	Acoustic Flooring	Safety Flooring
Heterogenous PVC	EN ISO 10582	EN ISO 10582	EN ISO 11638	EN ISO 11638	ISO 10582 - EN 13845
Slip Classification	-	-	-	-	Class ESf - ESb
Level of Use	23 - 34 - 43	23 - 34 - 42	23 - 34 - 42	23 - 33	34 - 43
Total Thickness	2.00mm	2.00mm	3.40mm	3.00mm	2.00mm
Wear Layer	0.70mm	0.70mm	0.70mm	0.50mm	0.70mm
Total Weight/m <sup>2</sup>	ca. 2.949g	ca. 2.557g	ca. 2.904g	ca. 2.198g	ca. 2.850g
Width	2 - 4m	2 - 4m	2m	2 - 4m	2 - 4m
Standard Length	ca. 25m	ca. 25m	ca. 25m	ca. 25m	ca. 20m
Slip Resistance	DS	DS	DS	DS	DS
Electrical Resistance	10 <sup>9</sup> Ohm	10 <sup>9</sup> Ohm	10 <sup>9</sup> Ohm	10° Ohm	10 <sup>9</sup> Ohm
Dimensional Stability	0.05% (norm ≤ 0.40%)	0.10% (norm ≤ 0.40%)	0.05% (norm ≤ 0.40%)	0.05% (norm ≤ 0.40%)	0.05% (norm ≤ 0.40%)
Thermal Conductivity	0.25 W/(m <sup>2</sup> .K)	0.0107 m <sup>2</sup> .K/W	0.031 m².K/W	0.0275 m <sup>2</sup> .K/W	0.0275 m <sup>2</sup> .K/W
Acoustic Insulation	∆ Lw 5 dB	∆ Lw 7 dB	∆ Lw 19 dB	∆ Lw 18 dB	∆ Lw 7 dB
Underfloor Heating	Suitable	Suitable	Suitable	Suitable	Suitable

## CLICK AND GLUE DOWN LUXURY VINYL FLOORS

### IMPERIAL WOOD Vinyl Tiles that Suit Any Decor

For a while, everyone was mad about ceramic tile and wood laminate flooring, but good old vinyl flooring is making a comeback.

It's versatile with colours and patterns to suit any decor. The latest click-vinyl technology bears the name Imperial.

Imperial Wood is 100% moisture resistant. It is made of 8 different layers.



### IMPERIAL STONE Extremely Durable Vinyl Floor

Made of 8 different layers and 100% moisture resistant Imperial Vinyl Floor is durable and able to withstand high traffic, pets and spills better than other options.

It's easy to clean and anyone looking to spruce up an older house or finish a new home on a budget will appreciate that installing a vinyl floor is an affordable way to make a dramatic improvement to a kitchen, bathroom or hallway.



### METROPOLITAN Floor that Looks Like Real Wood

Thanks to the unique "Emboss in Register" process, the Metropolitan collection recreates the perfection and realism of nature.

You are able to see and feel the depth of the grooves that perfectly follow the lines and knots of the wood.



## DESIGN FLOORS

Technical Specification	Imperial DRYBACK	Imperial CLICK	Metropolitan DRYBACK	Metropolitan CLICK
Level of Use	23 - 33 - 42	23 - 33 - 42	23 - 33 - 42	23 - 33 - 42
Total Thickness	2.50mm (100 mils)	4.50mm (180 mils)	2.50mm (100 mils)	4.50mm (180 mils)
Wear Layer	0.55mm (22 mils)	0.55mm (22 mils)	0.55mm (22 mils)	0.55mm (22 mils)
Total Weight g/m <sup>2</sup>	4.059	7.681	4.059	7.681
Slip Resistance	DS	DS	DS	-
Electrical Resistance	≤ 10º Ohm	-	≤ 10 <sup>9</sup> Ohm	-
Dimensional Stability	0.05% (norm ≤ 0.25%)	-	0.05% (norm ≤ 0.25%)	-
Heat Insulation	0.25 w/(m.K)	-	0.25 w/(m.K)	-
Acoustic Insulation	4dB	-	4dB	-
Underfloor Heating	Suitable, max 27 °C	-	Suitable, max 27 °C	-

## CASABLANCA OAK 24983

FRUITWOOD 20870







DORATO STONE 40862

PERLATO STONE 46968



SOMERSET OAK 52867





SOMERSET OAK

## HOMOGENOUS VINYL AND LINOLEUM

## **TARKETT IQ**

## **Tarkett**

### IQ GRANIT HOMOGENOUS VINYL FLOOR

Designed for education and healthcare facilities, iQ Granit offers outstanding performance with the best life cycle costs on the market.

With its classic design across an incredibly broad palette of 62 colours, this flexible vinyl floor can be easily matched to fit your school or hospital.






### TARKETT ECLIPSE PREMIUM HOMOGENOUS VINYL FLOOR

Eclipse Premium homogeneous vinyl floors combine quality, functional needs and low maintenance costs for heavy traffic applications such as education and healthcare facilities. PUR Reinforced surface treatment guarantees enhanced protection and easier maintenance.



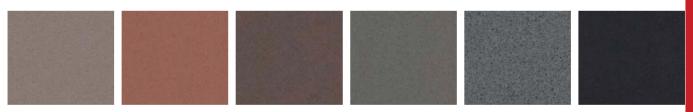


## TARKETT VENETO LINOLEUM


Veneto is one of the most natural and sustainable flooring solutions on the market. Tarkett linoleum has been appreciated for its beauty, comfort and durability for over 150 years.





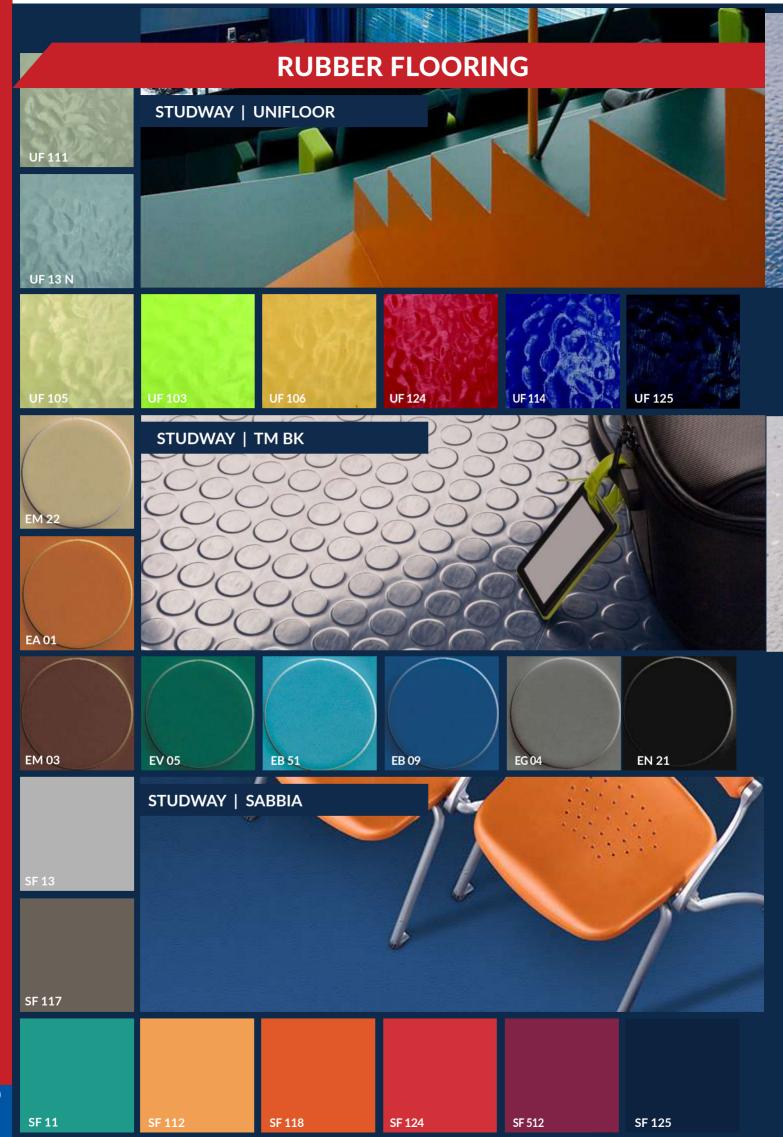

80

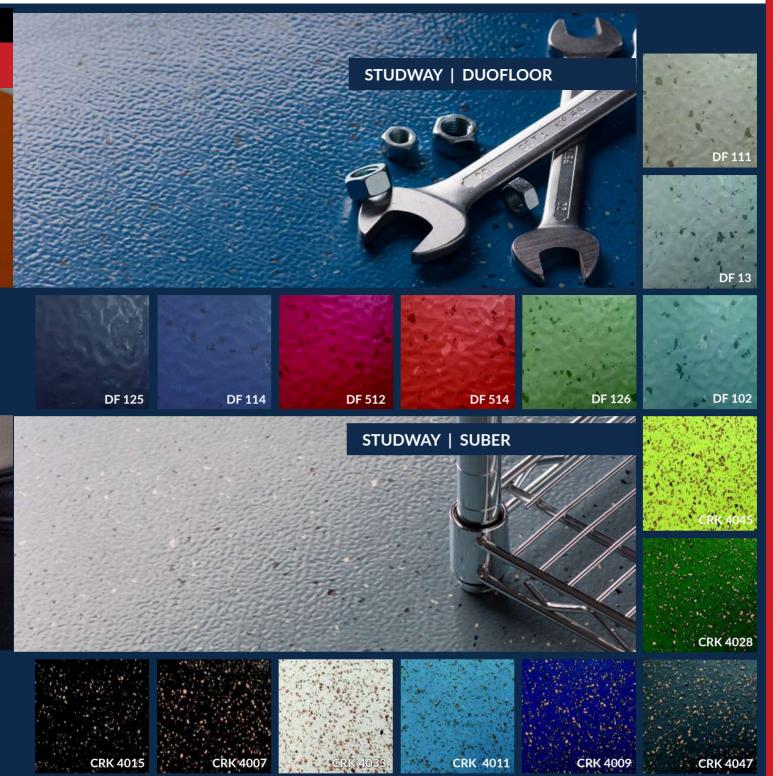

## A wide range of rubber flooring, in tiles and rolls, in an extensive collection of colours and for any imaginable use such as gym flooring, safety floor, fashion floors, airport flooring, healthcare flooring and other.

#### Rubber flooring has the following characteristics:

DURABLE - The high level of abrasion resistance of rubber enables use in heavy traffic areas for a long period of time.
 REDUCES NOISE - The rubber's natural elasticity reduces noise up to 20 dB. Free from PVC and halogens.
 NON-SLIP SURFACE - The rubber guarantees a higher level of slip resistance than required by international standards.
 FIRE RESISTANT - Rubber flooring, in addition to adhering to the maximum requirements of international standards, guarantees low opacity and smoke toxicity in case of fire. Cigarette burn resistant.

**ANTISTATIC** - The rubber protects users from electric shock. No trace is left on the floor surface.



## **HOSPITALITY & LEISURE PATTERNED BROADLOOM**


#### WESTEX HOSPITALITY & LEISURE BROADLOOM - Combine any 3 colours from 120 colour range.

Enjoy outstanding quality and the large 120 colour choice from the Ultima Twist Range. Available in 3.66mt (12ft) and 4mt widths with a minimum order of 80m<sup>2</sup>.

#### ULTIMA TWIST COLLECTION - The heart of Westex Carpets with 120 colours in 8 different qualities.

Made from premium 80% Wool and 20% Polyamide these carpets give a superb combination of performance and technical design including antimicrobial and stain resistance. The Twist range offers 4 original 1/8th gauge twists and 4 satin 1/10th gauge twists.

Graded heavy duty contract and extra heavy duty residential carpet.

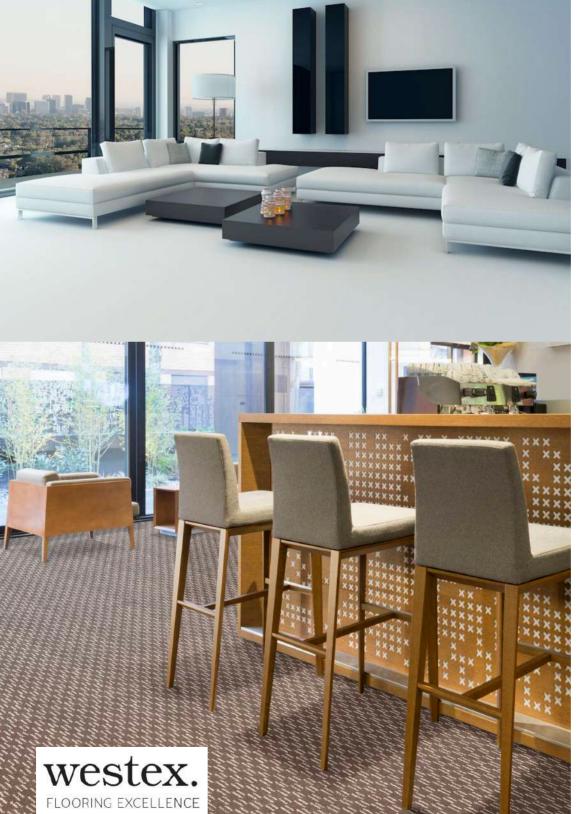




























## **COMMERCIAL CARPET TILES**

The versatility and flexibility of carpet tiles offers nearly limitless possibilities without compromising style, quality and value. Carpet tile is a durable solution for the commercial space, allowing added texture, edgy combinations and endless options in running line and custom patterns.

## CARPET TILES

ÍVC



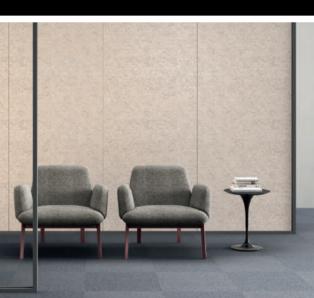

## **Creative Spark Collection**

Inspiration comes in many forms and hues. Art Intervention's bold Creative Spark reflects this wealth in its versatile designs. The textured and solid carpet tiles allow for a unique colour play while achieving class 33.

112	611	656	676	574	565	998	566	
	Marking and							
879	741	636	464	454	474	543	574	
					TILE SIZE: 50 x 50 cm			
					BACKING: EcoFlex Stasera			
	Same Area and				TOTAL THICKNESS: 6.2 mm			
					TOTAL WEIGHT: 4100 g/m <sup>2</sup>			
					NORM: EN1307			
956	946	353	333	222		PILE MATERIAL: 100% Colorstand® Premium NYLON		
	740 333	000		100% Solution Dyed Pa 6				

## **PREMIUM COATING PRODUCTS**





WETROOM

# DECORATIVE MINERAL COATING

## MORTEX : Colored Mineral Covering with a 'Waxed Concrete' Look!

## With its technical and aesthetics properties, Mortex, thin and colorful, is suitable for your new construction or renovation projects!

This mineral micro-mortar, composed among others of natural lime, was developed by the company Beal 25 years ago to make a real technical progress in the market of coatings.

Waterproof in its mass, Mortex has evolved towards more aesthetics and creativity, thanks to the infinite play of colors and possible effects.

Sensual material, Mortex follows all forms and offers a continous 'polished concrete' look to your realizations, both horizontal and vertical, indoor and outdoor.







## SOUND AND VIBRATION INSULATION

## **DIRECTLY UNDER FLOOR COVERING**



#### DAMTEC® STANDARD

#### Universal Impact Sound Insulation Under Floor Covering

DAMTEC<sup>®</sup> Standard is the universal product for impact sound insulation. This underlay can be used under parquet, laminate, carpeting and ceramic tiles (for dry areas) as well as under linoleum and PVC flooring (with separating layer).

#### DAMTEC® RESISTANT CORK

Fire Rated Impact Sound Insulation Under Floor Covering

Whenever the acoustic underlay must comply with high requirements of the structural fire protection (B1, Cfl-s1), then DAMTEC<sup>®</sup> Resistant Cork is the ideal acoustic underlay, suitable for residential and commercial buildings.



#### DAMSTIK APPROVED ADHESIVE

Solvent-free Dispersion Adhesive Suitable for Damtec Membrane.

## **UNDER SCREED**



#### DAMTEC® 3D

#### A Rubber Underlay With a One Sided Profiled Surface

Provides long service life and reliable impact sound reduction. It is especially suited for commercial and industry buildings, such as supermarkets and storehouses.

> FRIENDLY PRODUCT

AMTE

#### DAMTEC® ESTRA & ESTRA 3D

Damtec<sup>®</sup> estra provides outstanding elasticity and extremely high resistance to compressive loads. DAMTEC<sup>®</sup> estra 3D is the ideal rubber

underlay under floating screed / concrete slab or underneath rigid floor elements on wooden subfloors.

#### **DAMTEC® SYSTEM**

#### A Premium Insulating Padding for Concrete or Wooden Subfloors

It provides outstanding impact sound deadening properties under screed or rigid floor elements.

Characterized by a very low dynamic stiffness.

RECYCLE ABOUT 85,000 TONS OF OLD TYRES All products are 100 % RECYCLABLE without loss of quality

EVERY YEAR, KRAIBURG RELASTEC PROCESS AND

## **RESIN SURFACES**

## SHERWIN-WILLIAMS PROTECTIVE COATINGS

- Primers
- Epoxy clear seals and floor coatings
- Water based epoxy coatings
- Pigmented high build floor coatings
- Elladur Polyaspartic
- Epoxy self smoothers
- Epoxy screeds
- Polyurethane clear seals
- Pigmented polyurethane floor coatings
- Resuthane polyurethane screeds
- Resuthane polyurethane self smoothers
- Resuthane ancillary products
- Rapid fast cure products
- Line marking
- Wall coatings
- Wetroom solutions
- Anti-Static systems
- Cementitious products
- Resin bound and resin bonded
- Repair and jointing compounds
- Decorative systems
- Aggregates and flakes
- Coloured quartz



R



## Solutions for every sector with wide range of colours and applications

## **HEALTHCARE / PHARMACEUTICAL**

High-performance solutions that meet requirements for aesthetics and durability. With excellent slip resistance, resin helps meet the stringent health and safety requirements.

## HOSPITALITY

Range of resin systems developed for dry or wet food production and preparation environments. Designed to be hard wearing and slip resistant.

## MANUFACTURING / WAREHOUSING

Sherwin-Williams comprehensive range of products for warehouse flooring include seamless resin floor and wall coating suitable for the most demanding areas.

## **NEW RESIDENTIAL**

A perfect solution for every surface of a new home. Keep your residents happy, meet tight deadlines and control costs.

## **EDUCATION**

Solutions that meet requirements for aesthetics, durability and VOC compliance for every surface in every school. Suitable for all types of education facilities.

## **INDUSTRIAL**

With an extensive range of seamless resin floor and wall finishes we understand what it takes to meet the day-to-day demands of production.

## COMMERCIAL

Sherwin-Williams floor and wall coatings are used in all areas of the commercial sector. Decorative finishes and colours are in line with current trends and are often matched with corporate branding.

## FARM / AGRICULTURAL

High performance, durable, cost effective and easy-to-clean solutions that will meet all your performance requirements.

## WHATEVER YOUR INDUSTRY WE HAVE IT COVERED



## Contact Laydex today to find out more about Resin Surfaces!

## SUBFLOOR AND PREPARATION MATERIALS





## **SCHÖNOX**

The SCHÖNOX<sup>®</sup> name is synonymous with quality products for the building and renovation industry and has been for many years, as well as being one of the leading suppliers to the German, French and UK markets.

The company develops and manufactures quality products for installing all types of floor tiles and coverings for professionals.

The range includes levelling compounds, floor adhesives, primers and waterproof membranes under the SCHÖNOX<sup>®</sup> brand name.

## NOT ALL FLOOR ADHESIVES ARE THE SAME SOME SUIT THE MODERN WORLD BETTER THAN OTHERS





Product	Application	Size	Code	Pallet
SCHÖNOX EMICLASSIC	Universal pressure sensitive dispersion adhesive suitable for all flexible coverings, for textile coverings with PVC, PU backing, filler-free backing, linoleum coverings, synthetic rubber coverings and impact sound insulation underlay.	14kg	820600	
SCHÖNOX SHP	Special acrylic primer for use on sound, smooth, non-porous substrates in interior areas. Especially prior to use of SCHÖNOX underlayment on ceramic tiles, old vinyl, linoleum and rubber coverings.		820633	90
SCHÖNOX VD	Universal primer for absorbent and non-absorbent substrates for use as a primer with SCHÖNOX levelling compounds and suitable for the pre-treatment of absorbent, non-absorbent and smooth substrates on walls and floors.		820631	60
SCHÖNOX FPL PLUS	A cement based self-levelling compound for use from 3 to 60 mm. Suitable on cement and gypsum based substrates. Designed for fast levelling in interior and exterior areas. Suitable for application on subfloor heating systems.		820641	42
SCHÖNOX SL	Cement based rapid drying, smoothing and finishing compound. Suitable to provide a smooth finish on various substrates in interior areas. SCHÖNOX SL can be installed as a true featheredge.	4.5kg	820637	50
SCHÖNOX JOINT SEALING TAPE	A crosswise elastic, double-sided fleece-cladded special seal tape. In combination with SCHÖNOX bonded sealing's to tighten wall- and wall-/floor connections. Also suitable for joints as well as for connections with danger of cracking and penetrations.	10m	820705	
SCHÖNOX HA TANKING MEMBRANE	Ready mixed, roll-able waterproof sealing membrane for installations of waterproof sealing under ceramic tiles in residential and commercial wet rooms in interior areas.	7kg 16kg	820697 820699	-
SCHÖNOX LC	2K self levelling compound for use from 3-60 mm. SCHÖNOX LC is characterized by low shrinkage. After adding the liquid component (4,75 L) to 25 kg of the powder SCHÖNOX FPL PLUS the product is ready for use. For interior and exterior use.		820645 820646	42 42

## **RESIDENTIAL • COMMERCIAL • PUBLIC • HEALTHCARE • INDUSTRIAL**



## **PASSIVE FIRE PROTECTION**

Alongside our market leading Intumescent coatings for the protection of steel structures and timber, we offer a comprehensive range of fire stopping products, providing passive fire protection solutions to construction movement joints, gaps and service penetrations.

These products have been fully tested and approved to the latest European Standards, providing some of the highest levels of product certification.

In conjunction with our industry leading manufacturer, Nullifire/Firetherm, we provide the project specifier and the contractor with high quality fireproofing solutions alongside extensive technical support ranging from on-site surveys to project specific specifications.





Through our Passive Fire Protection Division we supply a portfolio of passive fire stopping products. Firetherm products are fully tested and approved to the latest European Standards.

Nullifire

## **EXPERIENCE IN EVERY SECTOR**

## COMMERCIAL



A complete range of integrated fire stopping solutions

## **PUBLIC SECTOR**



Protecting the most vulnerable areas from fire

## INFRASTRUCTURE



Delivering trusted, life-saving solutions

## **LEISURE & ENTERTAINMENT**



Innovations used all over the world

## INDUSTRIAL



Leading the way with innovative intumescent coatings

## WALL AND PENETRATION SEALING

### INTUBATT 2 (FB750) Batt for Use Within Walls and Floors



Intubatt is a factory finished, unique multi-layered, low resin bonded, rock mineral fibre board. Firetherm ablative coated on both faces with our unique Optifire-identifiable coating. Manufactured under controlled factory conditions

to ISO 9001 to the required thickness and specification.

Intubatt may be over coated using a suitable emulsion or eggshell paint for decorative purposes.

#### INTUMASTIC TROWEL/BRUSH (FS702) Used to Coat Mineral Fibre Insulation Batts Already In-Situ



Trowel-grade or brush grade, medium viscosity paste, or low viscosity liquid containing acrylic emulsion, inert fillers and fungicide.

To be used for internal applications only.

#### INTUCOMPOUND (FR230) Compound Mixed to Form Fire Barrier



Intucompound is a dry powder mix formed of inorganic binders, lightweight aggregates and stable additives.


The product does not contain fibres or asbestos and is halogen free.

Intucompound is easy to mix with good product flow. It is air pressure tested to 2000 Pa, has a good workability, exceptional yield and it is service capable.




## PIPE AND CABLE PENETRATION CLOSING

### INTUCOLLAR (FP170) Collar for Sealing Plastic Pipes



A metal shell produced in two hinged halves, lined with intumescent material, to be placed around combustible pipes and fixed to compartment walls and floors with all steel anchors (supplied) to provide up to 4 hours fire protection.

#### INTUSLEEVE (FP160) Intumescent Closer Device



A 140 to 300mm (dependent on requirement) deep steel sleeve that is positioned around combustible pipes, to provide up to 4 hours fire protection.

Designed specifically to provide a low cost solution for fire sealing combustible

pipe penetrations whilst completely protecting the cavity within stud work walls. Intusleeve is a perfect solution for angled pipes.

#### INTUPUTTY PAD (F0100) Putty Pad




Intuputty Pads have been designed to maintain the fire resistance of gypsum walls when breached by electrical switches and sockets.

Provides up to 120 minutes fire resistance in 100mm and 130mm dry lining.

It is solvent free, ready to use and suitable for all dry lining applications. No special tools required for application.

### INTUSTRAP/INTUBAND (FP302) High Pressure Expansion Strip



Intustrap is a ruberoid strip with high flexibility and is most commonly used around all types of pipe Insulation up to 50 mm thick or combustible pipes with a diameter of between 20 mm and 160 mm. Intustrap may also be used around

conduits, cables (if required), and to close ventilated air spaces. Intubands are pre-configured pipe wraps to suit proprietary pipe size.

## **ELECTRO PAD**

Fire Protection Within Electrical Socket Boxes in



## Fire Compartment Walls

A pressure exerting graphite manipulated extruded rubber pad. Electropad is simply bonded into position at the rear of the socket box, only reacting in the event of a fire.

#### **INTUPILLOW PRO** Intumescent Foam Strip



Firetherm Intupillow Pro is fire resistant compressible foam strip layered with high expansion intumescent material produced in three sizes.

In a fire, the intumescent expands and hardens providing a fire-tight and mechanically strong barrier.

## **SPECIALIST SEALANTS - Linear and Movement Seals**

#### **INTUMASTIC (FS702) Firestopping Mastic Sealant**



Suitable for dry internal use only. Joint widths 0 to 35 mm linear; 30 to 150 mm movement details. Depth to width ratios 1:1 walls and floors: 2:1 split wall seals.

Standard colours are white and grey. Can be overpainted using acrylic paints

(must be fully cured before over-coating). Tack free time 15 to 60 minutes, depending on temperature/humidity.

#### INTUMASTIC ADL Fire Rated Mastic for Internal Uses



Suitable for dry internal use only.

Joint widths 0 to 35 mm linear; 30 to 150 mm movement details. Depth to width ratios 1:1 walls and floors: 1:2 split wall seals.

Can be over-painted using acrylic paints (must be fully cured before over-coating). Tack free time 15 to 60 minutes, depending on temperature/humidity.

#### **INTUMASTIC HP (FS709)** Intumescent Acrylic Fire Barrier



Intumastic HP is fully tested to for hours fire protection. Can be used in both walls and floors.

#### **INTUSIL (FS703) Firestopping Mastic Sealant**



aluminium. Intusil cannot be readily over-coated.

An aqueous acrylic fire barrier mastic for internal use, containing inert fillers and graphite. Maximum diameter 90 mm

combustible pipe seals or 60 mm annular space around cables etc.

Intusil is a modified low modulus silicon that is designed for use in external aggressive environments or in high movement building

joints. It has high adhesion and

is suitable for high sheen surfaces such as glass and PASSIVE

FIRE

PROTECTIO

Ž



## LINEAR MOVEMENT & SPECIALIST BUILDING GAP SEALS

## **FIRETHERM 30**

PASS

Π

RE

υ

RO

Ž

Z

**JEAR** 

MOV

Ē

 $\leq$ 

4

 $\circ$ 

SPE

AL

S

ω

Ь


ົດ

GAP

SE

S

30 Minute Fire and Smoke Barrier in Roof Voids and



## Large Volume Areas

Heavy duty non-insulant 260 g/m<sup>2</sup> coated glass fibre cloth supported on a steel frame. Unlike other reinforced mineral fibre solutions, there is very little fibre dust created during installation or during the life of the barrier.

Long drops up to 3m can be achieved without the need of extra support framework. As the system is lightweight it can be fitted to small section structural steel members without the risk of overloading. If in doubt refer the to the project engineer or specifiers.

## **RAINBAR 60 RANGE**

**Encapsulated Intumescent** 



Rainbar 60 is a high pressure graphite-manipulated intumescent composite retained within its carrier by a polymeric water proof encapsulate. The product remains dormant unless exposed to fire.

The intumescent is capable

of completely closing up to a 50 mm air space whilst maintaining 60 minutes fire integrity. Its simple fixing system allows for speedy installation on site. Rainbar 60 is both lightweight and durable and requires no further maintenance. The product requires no further sealing.

#### **FIRETHERM 90** 90 Minute Fire and Smoke Barrier in Roof Voids and Large Volume Areas



Heavy duty non-insulant 470 g/m<sup>2</sup> coated glass fibre cloth supported on a steel frame. Unlike other reinforced mineral fibre solutions, there is very little fibre dust created during installation or during the life of the barrier.

Long drops up to 3m can be achieved without the need of extra support framework. As the system is lightweight it can be fitted to small section structural steel members without the risk of overloading. If in doubt refer the to the project engineer or specifiers.

## **SPANATHERM**

#### Firestopping for Slab Edge and Curtain Walling, for



insulation and an effective smoke seal.

Spanatherm is a dense, fibrous lamella system faced on both sides with foil to provide Class O surface spread of flame and a vapour check barrier



## **Gun Grade Fire Rated PU Foam**

Used to seal linear gaps throughout the fire rated areas of a building.

A modified, single component, fire rated polyurethane foam.

Perfect for sealing gaps found around fire rated doors, and can be easily applied with a straw nozzle or professional foam

Certified to the latest British and European standards EN 1366-4, DIN 4102 Pt 1 (B1) and EN 13501: Pt 2

#### Static or Movement Joints Spanatherm is a strong

pre-engineered rock fibre movement-joint fire seal, that allows significant movement accommodation at the same time as providing fire integrity,

**FF197** 



## A COMPLETE RANGE OF INTEGRATED FIRE STOPPING SOLUTIONS



Nullifire

TS815

Nulli<mark>fire</mark> TS815

00

Nullifire

60c




No

111

Notes

Notes

Notes

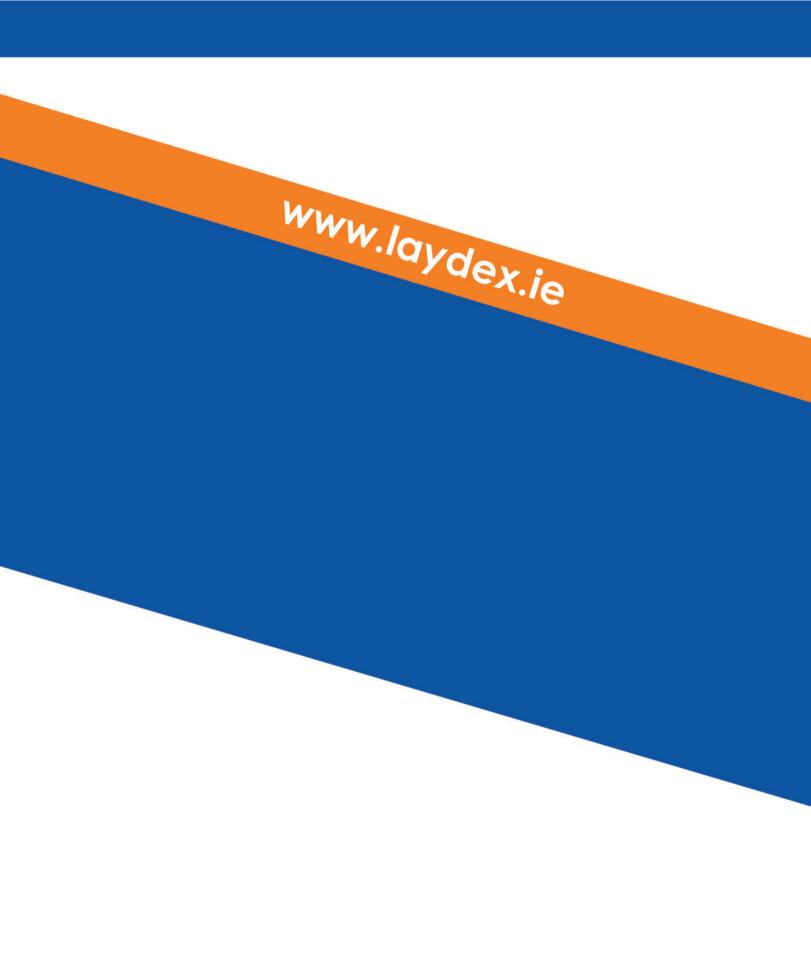



Unit 3, Allied Industrial Estate, Kylemore Road, Dublin 10 +353 1 642 6600 sales@laydex.ie www.laydex.ie