



# STRADBALLY LADDERS LTD

IRELAND'S ONLY LADDER MANUFACTURER

**IRELAND'S ONLY MANUFACTURER  
OF WOOD, ALUMINIUM &  
FIBERGLASS LADDERS**

**Carlow Road, Stradbally, Co. Laois, Ireland, R32 D252**

**Tel: +353 57 86 25140**

**Email: [sales@stradballyladders.com](mailto:sales@stradballyladders.com)**

**Web: [www.stradballyladders.com](http://www.stradballyladders.com)**

**GPS Code: 53.01101458, -7.13897553**



# Aluminium Double Ext. Ladders

**Push-up BS.EN131 Standard Carry Capacity 150kg**



Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
AE 11	7' 0" - 2.13m	11' - 3.35m	2 x 7	6.75kg
AE 14	8' 1" - 2.48m	14' - 4.27m	2 x 8	8.00kg
AE 17	9' 8" - 2.95m	17' - 5.18m	2 x 10	10.00kg
AE 20	11' 6" - 3.51m	20' - 6.10m	2 x 12	10.25kg
AE 22	12' 3" - 3.74m	22' - 6.71m	2 x 13	13.00kg
AE 24	13' 4" - 4.06m	24' - 7.32m	2 x 14	16.50kg
AE 26	14' 3" - 4.34m	26' - 7.92m	2 x 15	18.00kg
AE 28	15' 0" - 4.57m	28' - 8.53m	2 x 16	22.00kg
AE 30	16' 4" - 4.98m	30' - 9.14m	2 x 17	24.00kg

# Aluminium Triple Ext. Ladders

**Push-up BS.EN131 Standard Carry Capacity 150kg**



Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
AS 15	7' 0" - 2.13m	15' - 4.57m	3 x 7	10.50kg
AS 20	8' 1" - 2.48m	20' - 6.10m	3 x 8	13.00kg
AS 25	9' 9" - 2.99m	25' - 7.62m	3 x 10	20.00kg
AS 30	12' 3" - 3.74m	30' - 9.14m	3 x 13	23.75kg
AS 35	16' 4" - 4.98m	35' - 10.67m	3 x 17	34.00kg

# Aluminium Single Ladders

**BS.EN131 Standard Carry Capacity 150kg**



Ref No:	Closed Ht:	Rungs:	Weight:
S 12	11' 6" - 3.5m	12	8.00kg
S 13	12' 0" - 3.7m	13	8.25kg
S 14	13' 0" - 4.0m	14	9.00kg
S 15	14' 0" - 4.5m	15	11.00kg
S 16	15' 0" - 4.7m	16	12.00kg
S 17	16' 4" - 5.0m	17	13.50kg

## Adjustable Ladder Standoff



- All box shaped stile with 'D' shaped rung
- Other sizes can be manufactured on request
- Crawler wheels and suction cups can be fitted as extra




# Double Sided Standing Rung Ladders

(Painter's Trestles) - BS - EN131 Standard


Manufactured from Hemlock

Ref No:	Closed Height:	Rungs:	Weight:
PT04	4' 0" - 1.21m	2 x 4	9.00kg
PT06	6' 0" - 1.83m	2 x 6	13.75kg
PT08	8' 0" - 2.44m	2 x 8	17.75kg
PT10	10' 0" - 3.05m	2 x 10	22.75kg
PT12	12' 0" - 3.66m	2 x 12	28.75kg
PT14	14' 0" - 4.26m	2 x 14	35.75kg

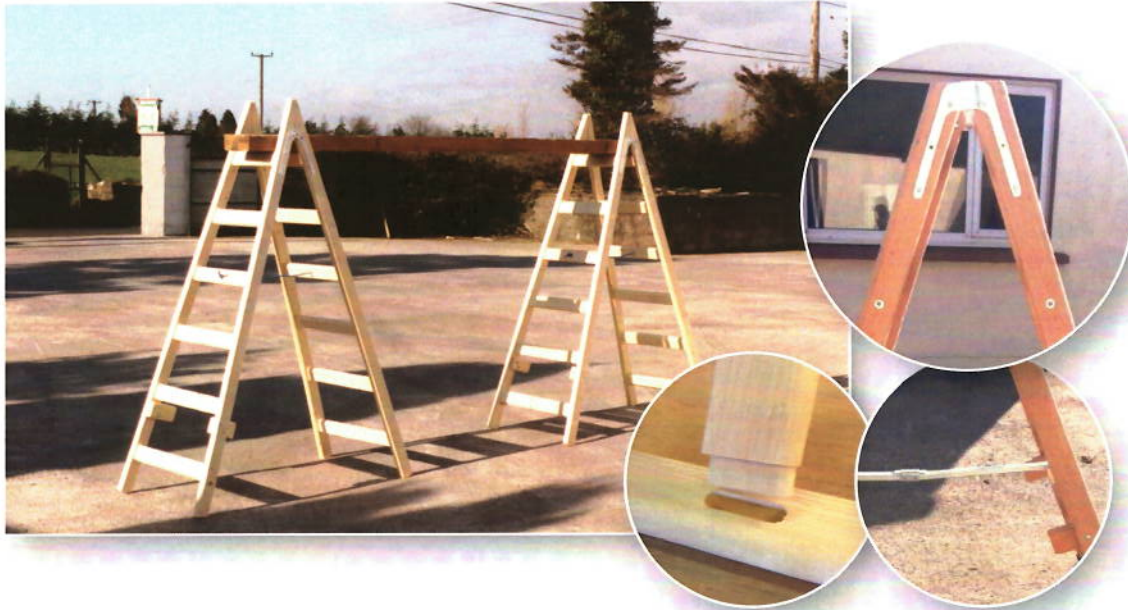

## Aluminium Roof Ladders

Aluminium box section complete with Ridge Hook and Crawler Wheels

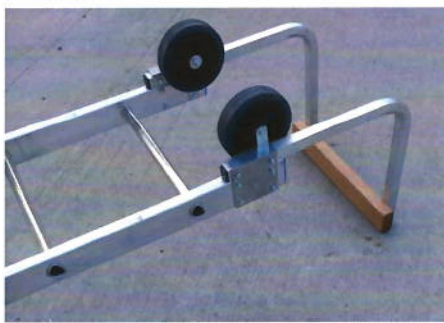

**Folding Type** (for ease of use in storage and transportation)

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
AR 17	9' 8"	17' - 5.28m	2 x 9	13.00kg
AR 20	10' 6"	20' - 6.10m	2 x 10	14.00kg
AR 24	13' 6"	25' - 7.62m	2 x 13	19.00kg

**Straight Type**

Ref No:	Extended Ht:	Rungs:	Weight:
AR 17S	17' - 5.18"	18	10.50kg



• Other sizes can be manufactured on request



**PLATFORM STEP LADDER  
WITH HAND RAIL**



CODE	CLOSED HEIGHT	PLAT. HEIGHT	DESCRIPTION
PL03	1.82m	0.80m	3 STEP
PL04	2.0m	1.10m	4 STEP
PL05	2.26m	1.30m	5 STEP
PL06	2.52m	1.62m	6 STEP
PL07	2.9m	1.86m	7 STEP

**DOUBLE SIDED STEP LADDER  
BOX SECTION**



CODE	CLOSED HEIGHT	DESCRIPTION
STEP03	1.00m	3 STEP
STEP04	1.20m	4 STEP
STEP05	1.50m	5 STEP
STEP06	1.75m	6 STEP
STEP07	2.00m	7 STEP
STEP08	2.25m	8 STEP
STEP10	2.70m	10 STEP

**SINGLE SIDED STEP LADDER  
WITH TOOL TRAY**



CODE	CLOSED HEIGHT	DESCRIPTION
SST04	1.40m	4 STEP
SST05	1.70m	5 STEP
SST06	1.95m	6 STEP
SST07	2.20m	7 STEP
SST08	2.45m	8 STEP
SST10	2.70m	10 STEP

**MOBILE SAFETY STEPS  
MADE TO ORDER**



CODE	PLAT. HEIGHT	DESCRIPTION
MOBI04	1.0m	4 STEP
MOBI05	1.2m	5 STEP
MOBI06	1.44m	6 STEP
MOBI07	1.68m	7 STEP
MOBI08	1.92m	8 STEP
MOBI09	2.16m	9 STEP
MOBI10	2.5m	10 STEP

**WAREHOUSE STEP LADDER**



CODE	CLOSED HEIGHT	PLAT. HEIGHT	DESCRIPTION
WARE03	1.82m	0.80m	3 STEP
WARE04	2.0m	1.10m	4 STEP
WARE05	2.26m	1.30m	5 STEP
WARE06	2.52m	1.62m	6 STEP
WARE07	2.9m	1.86m	7 STEP

• Other sizes can be manufactured on request



# Extendable Podium Ladders Aluminium & Fiberglass


BS - EN131 Standard



- *Our Ladders can be repaired*
- *New parts fitted*
- *New parts supplied*

# Extendable Podium Ladders Fiberglass

BS - EN131 Standard

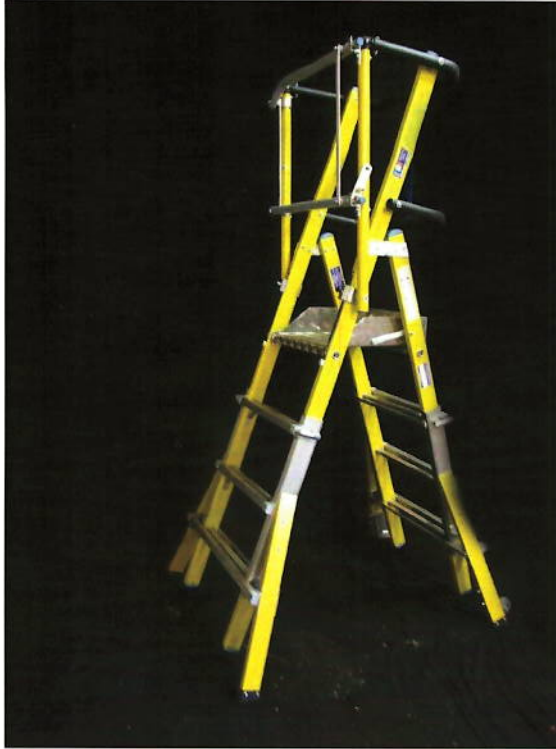

## Key Features

- Fully Passed BS EN 131
- Complies with The Safety At Work Act
- Adjustable Working Height
- One man operation
- Guard Hand Rail on all sides 360 degrees
- Assembled and Dismantled in Minutes
- Solid, Large Platform with toebar.
- Adjustable for use on a stairs.
- Easily Moved, Transported And Stored.

CLOSED STEPS	OPEN STEPS	CLOSED HEIGHT	OPENED HEIGHT	FIBERGLASS WEIGHT (KG)
4	6	3' 4" 1.10m	5' 4" 1.62m	30
5	8	4' 6" 1.36m	7' 2.14m	33
6	9	5' 5" 1.64m	7' 9" 2.36m	37
7	11	6' 2" 1.88m	9' 9" 2.95m	44

## Extendable Podium Ladders

The Extendable Podium Ladder is a high quality working platform. This Podium is designed for one man operation and can be quickly and simply adjusted to various heights. It is fitted with rubber wheels and is easy to manoeuvre.

It is safe and stable and is suited for all site work and maintenance work. It is designed to fold flat and be store in a small area, it will pass through a standard doorway and can be transported on car roof rack.



# Extendable Podium Ladders Aluminium

BS - EN131 Standard



## Key Features

- Fully Passed BS EN 131
- Complies with The Safety At Work Act
- Adjustable Working Height
- One man operation
- Guard Hand Rail on all sides 360 degrees
- Assembled and Dismantled in Minutes
- Solid, Large Platform with toebar.
- Adjustable for use on a stairs.
- Easily Moved, Transported And Stored.

CLOSED STEPS	OPEN STEPS	CLOSED HEIGHT	OPENED HEIGHT	ALUMINIUM WEIGHT (KG)
4	6	3' 4" 1.10m	5' 4" 1.62m	23
5	8	4' 6" 1.36m	7' 2.14m	26
6	9	5' 5" 1.64m	7' 9" 2.36m	31
7	11	6' 2" 1.88m	9' 9" 2.95m	34

## Extendable Podium Ladders

The Extendable Podium Ladder is a high quality working platform. This Podium is designed for one man operation and can be quickly and simply adjusted to various heights. It is fitted with rubber wheels and is easy to manoeuvre.

It is safe and stable and is suited for all site work and maintenance work. It is designed to fold flat and be store in a small area, it will pass through a standard doorway and can be transported on car roof rack.

# Fixed Height Aluminium & Fibreglass Podium Box Section

Fibreglass

BS - EN131 Standard

Aluminium



CODE	NO. OF STEPS	PLATFORM HEIGHT
PODF02	2 STEP	0.55m
PODF03	3 STEP	0.80m
PODF04	4 STEP	1.05m
PODF05	5 STEP	1.27m
PODF06	6 STEP	1.54m
PODF07	7 STEP	1.85m

CODE	NO. OF STEPS	PLATFORM HEIGHT
PODA02	2 STEP	0.55m
PODA03	3 STEP	0.80m
PODA04	4 STEP	1.05m
PODA05	5 STEP	1.27m
PODA06	6 STEP	1.54m
PODA07	7 STEP	1.85m



## Fibreglass Channel Section Fixed Podium

CODE	NO. OF STEPS	PLATFORM HEIGHT
PODFC02	2 STEP	0.48m
PODFC03	3 STEP	0.72m
PODFC04	4 STEP	0.96m
PODFC05	5 STEP	1.20m
PODFC06	6 STEP	1.44m
PODFC07	7 STEP	1.68m
PODFC08	8 STEP	1.92m
PODFC09	9 STEP	2.16m
PODFC010	10 STEP	2.40m

• Other sizes can be manufactured on request



# Aluminium Step Ladders Industrial

## Double sided - BS.2037 Standard

Heavy Duty Double Sided Step Ladder, constructed with Chanel Stile, thread & Locking Device



Ref No:	Height:	Treads:	Weight:
ASL .75	2' 6" - 0.75m	3	5.00kg
ASL 1.0	3' 4" - 1.00m	4	7.50kg
ASL 1.5	4' 11" - 1.50m	6	10.00kg
ASL 2.0	6' 6" - 2.00m	8	12.75kg
ASL 2.5	8' 2" - 2.50m	10	17.00kg

# Fibreglass Step Ladders Industrial

## Double sided - BS.2037 Standard

Heavy Duty Double Sided Step Ladder for Electrical and Industrial use. Channel Stile & Aluminium Thread



Ref No:	Height:	Treads:	Weight:
FIBR .75	2' 6" - 0.75m	3	7.00kg
FIBR 1.0	3' 4" - 1.00m	4	8.00kg
FIBR 1.2	3' 9" - 1.20m	5	10.00kg
FIBR 1.5	4' 11" - 1.50m	6	12.00kg
FIBR 1.75	5' 7" - 1.75m	7	13.00kg
FIBR 2.0	6' 6" - 2.00m	8	15.50kg
FIBR 2.25	7' 38" - 2.25m	9	17.00kg
FIBR 2.5	8' 2" - 2.50m	10	20.05kg

# Aluminium Double Sided Channel Section



Ref No:	Height:	Treads:	Weight:
WCS3	2' 6" - 0.75m	3	5.00kg
WCS4	3' 4" - 1.00m	4	7.50kg
WCS6	4' 11" - 1.50m	6	10.00kg
WCS8	6' 6" - 2.00m	8	12.75kg
WCS10	8' 2" - 2.50m	10	17.00kg

# Fibreglass Step Ladders



CODE	STEPS	HEIGHT
FR3	3	0.9M
FR4	4	1.2M
FR5	5	1.5M
FR6	6	1.8M
FR7	7	2.1M
FR8	8	2.4M
FR9	9	2.7M
FR10	10	3.0M
FR11	11	3.3M
FR12	12	3.6M

• Other sizes can be manufactured on request

**STRADBALLY**  
**LADDERS** LTD  
IRELAND'S ONLY LADDER MANUFACTURER



# Fibreglass Ladders

## BS.EN131 Standard

Constructed from Glass re-enforced plastic with Aluminium rung.  
Suitable for Electrical/Industrial use. Carrying capacity of 150kgs.

### Double Section Roped Ladder

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIBR 20	12' 0"	20'	2 x 12	26.5kg

### Triple Section Roped Ladder

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIBR 30	12'	30'	3 x 12	38.0kg

### Double Section Push-up Ladder

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIBR 15	9' 10"	15' 6"	2 x 9	12.0kg
FIBR 20	11' 6"	20'	2 x 12	18.0kg

### Triple Section Push-up Ladder

Ref No:	Closed Ht:	Extended Ht:	Rungs:	Weight:
FIBR 21	9' 10"	21' 9"	3 x 9	20.0kg

- Other sizes can be manufactured on request
- Single section ladders available



Foot



Clutch

Wheel & pole bow



# Combination Ladders

CLOSED STEP LADDER



EXTENDED STEP LADDER



ADJUSTABLE STEP LADDER



FULLY EXTENDED LADDER



CLOSED EXTENSION LADDER



SCAFFOLDING



LADDER HEIGHT

STEP LADDER HEIGHT

STORAGE

<b>COMB 03</b>	10' (3.04m)	3'5' (0.91–1.5m)	3'4" (1.01m)
<b>COMB 04</b>	13'9" (4.19m)	4'6'7" (1.21–2m)	4' (1.21m)
<b>COMB 05</b>	17'4" (5.28m)	4'11"/8'5" (1.49–2.56m)	4'11" (1.49m)
<b>COMB 06</b>	21'2" (6.5m)	5'4"/9'9" (1.6–2.9m)	6'3" (1.9m)



Carlow Road,  
Stradbally, Co. Laois  
Ireland, R32 D252

Tel: +353 57 86 25140

Email: sales@stradballyladders.com

Web: www.stradballyladders.com

STRADBALLY  
LADDERS LTD

IRELAND'S ONLY LADDER MANUFACTURER

## Hedge Trimming Tripod

(Landscape or Orchard Ladder)



Extendable Tripod  
(back leg)



No. Steps	Height (M)	Height (")
6	1.90m	6ft 3in
8	2.43m	8ft
10	2.97m	9ft 9in

The tripod ladder is a highly specialised ladder engineered for orchard and landscaping work such as hedge trimming, pruning, training and fruit harvest operations. Single back leg provides relatively stable support on uneven terrain.

The tripod ladder is manufactured from aluminium and the rungs are textured to reduce slippage.

The tripod ladder is designed to be positioned by hand for maximum safety, allowing the user to precisely position the ladder to avoid holes or other hazards. The back of the ladder should be towards the tree or hedge centre. Top of ladder should not be used as a step.

### FEATURES:

- Extendable Tripod (back leg)
- Extra strong extruded side rail
- Wide base for stability
- Self-locking hinge
- Wide anti-slip aluminium threads
- Tool Tray