

What is Laminate Wood Flooring?



- A Clear protective layer
- **B** Decorative layer
- **C** High-density fibreboard core

Laminate wood flooring consists of a number of stable layers which ensure the extraordinary durability and unique quality of our flooring.

- **A.** The top surface of the floor consists of a specially resistant protective overlay film. This is fused with an attractive wood effect decorative film into a practically abrasion proof, hard wearing surface.
- **B.** Extremely dense HDF fibreboard forms the supportive core.
- **C.** An anti-damp film ensures and preserves the high structural stability.

The look and feel of high-quality laminate floors make them virtually indistinguishable from solid wood. Unlike solid wood floors, they consist of a HDF wood core layer covered with a decorative layer. Laminate flooring comes in various widths, lengths and thickness's to suit all applications. Long plank formats with surrounding V-joint and nature-identical embossing are now especially desirable as they replicate genuine country house style plank floors more accurately than ever before.

Surface treatment that is embossed in register (ER), in other words, the surface of the floor follows the same grain as natural wood with real indentations and graining across the plank as opposed to a totally smooth finish for an authentic look.

Laminate flooring is also robust, fade resistant, easy to clean, and has low emissions. A big advantage over real wood flooring, apart from being kinder on your wallet, is that you can easily install laminate yourself. A tongue-and-groove click-together system makes it incredibly simple to install attractive floors yourself.

Laminate flooring is at home everywhere: in living rooms, kitchens and bedrooms as well as in commercial spaces such as offices, hotels and restaurants.

There are a wide range of different decors to choose from to help you achieve your personal decorating style. Whether you prefer classic oak, nature-identical wood styles or contemporary adaptations, there are virtually no limits to your individual creativity with this versatile floor covering. These floors are simple to install and hard-wearing.

Laminate flooring consists of approximately 90% wood, a natural material, making it an eco-friendly option delivering both health and environmental benefits.

Our range is complemented with a wide range of accessories including sound insulating underlay, skirting boards and trims for that finishing touch.

Laminate flooring meets all expectations with regard to modern day living. They are easy to clean by vacuuming or wiping with a slightly damp mop and due to the protective top layer are highly stain resistant. The smooth, unbroken surfaces prevent allergy-provoking microorganisms from accumulating resulting in a clean, hygienically flawless floor – thus making laminate especially suited for people with allergies.

We hope you enjoy browsing through our collections where you will find the best floor for your project. Our full range of flooring including engineered real wood, solid flooring as well as composite decking can all be found on our website www.wrg.ie while our range of Seadec internal doors can be found at www.seadec.ie



LONG PLANK

10MM MAMMUT PLUS LONG PLANK 4V 09

12MM MAMMUT LONG PLANK 4V 15

8MM TRITTY 100 GRAN VIA 4V 23

STANDARD PLANK

12MM ROBUSTO 4V 31

12MM EVOLUTION 4V 41

10MM METRO 4V 45

10MM METRO HIGH SHINE 51

8MM HERRINGBONE 4V 53

8MM EXQUISIT PLUS WIDE 244MM 4V 59

8MM DYNAMIC 4V **65**

8MM EXCEL 4V 73

6MM & 7MM **77**

HARO DISANO AQUA

9.3MM DISANO AQUA CLASSIC 4V 85

ACCESSORIES

UNDERLAYS 91

WHITE PRIMED SKIRTING & ARCHITRAVE 93

PREFINISHED SKIRTING 94

SCOTIA 95

STAIR NOSING 96

FLOORING PROFILES 98

MEASUREMENT GUIDE 100

INSTALLATION & AFTERCARE

INSTALLATION MADE EASY 101

GENERAL GUIDELINES 102

INSTALLATION INSTRUCTIONS 103

LINDEDELOOD HEATING

UNDERFLOOR HEATING 104

LAMINATE CARE & MAINTENANCE 105

ARCHITECTS & DESIGNER 106

EXPLORE OUR EXTENDED PRODUCT CATEGORIES ONLINE @ WWW.WRG.IE





LAMINATE & ENGINEERED FLOORING, COMPOSITE DECKING, ACCESSORIES, LACQUERS AND SEADEC DOORS

SEARCH BY DESIGN, BRAND, COLOUR AND BOARD SIZE

EXPLORE OUR EXTENDED PRODUCT CATEGORIES ONLINE @ WWW.WRG.IE





VIEW & DOWNLOAD INSTALLATION INSTRUCTIONS,
CARE & MAINTENANCE GUIDES AND PRODUCT DATA SHEETS

LATEST PRODUCT DEVELOPMENT AND RECENT PROJECTS

characteristics



Product Thickness

Indicates overall thickness of board.



4V Groove

V groove on all edges of board for natural plank appearance.



Moisture Guard

Improved moisture guard core board which gives enhanced anti swelling performance over standard laminates.



5G Click System

Premium 5G click system makes the floor even easier to install.



Underfloor Heating

Suitable for use with underfloor heating.



Drop Lock

Simple push down secure click system.



Long Plank

These panels are especially long.



Angle Angle Installation

Glue-less click installation.



Wide Plank

These panels are especially wide



All laminate floors resistance to wear is given as an abrasion class.















Suitable for high traffic commercial & everyday use.

Suitable for high traffic domestic everyday use.

Suitable for light commercial and domestic everyday use.



WARRANTY

All our floors come with a 6, 20, 25 or 30 year residential warranty. For full Warranty details visit www.wrg.ie











AquaTec

Double moisture protection exclusive to our HARO Gran Via Floors.



Blue Angel Certified

*All our laminate floors in this brochure are Blue Angel certified for low emissions, sustainability & environment.


*Excludes 10 mm Aged Ash, 12 mm Carlingford Oak, 12 mm Kinsale Walnut & 12 mm American walnut



Floor Score

FloorScore® is the most recognized indoor air quality (IAO) certification standard for hard surface flooring materials, adhesives, and underlayments. Developed by SCS with the Resilient Floor Covering Institute (RFCI), a leading industry trade association of flooring manufacturers and suppliers.

surface finishes



AF AUTHENTIC FLOORNatural and vivid wood texture



UL USED LOOKWith apparent signs of wear and tear



ER REGISTERED EMBOSSGenuine wood appearance due to consistency between pattern and embossing



WG WOOD GRAIN Rustic embossing



MX MATRIX

Deep structure embossing with typical wood matt/gloss contrast



HG HIGH SHINEHigh gloss mirror like finish



PR WOOD PORETypical wood structure



4V BEVEL ON ALL SIDESThe edges are bevelled on both sides and ends – for an even more vivid impression. The expert calls this "long and short side bevelling".

Exclusive HARO Surfaces


HARO

eir

EIR AUTHENTICAlmost indistinguishable from real wood. Texture and style match perfectly. The gloss level emphasises the character and the natural look of the wood reproduction.



TEXTURED MATTSimilar to real wood grain.
The matt appearance underlines the natural look.




EIR AUTHENTIC MATTAlmost indistinguishable from real wood. Texture and style match perfectly. The surface has a natural oil character. The Plank 1-Strip designs also have a slight shine effect in the pores.



SOFT MATTDistinctive velvety soft surface. Natural and matt with a slight gloss effect in the texture.





10MM MAMMUT PLUS LONG PLANK

The best and more. This is the promise of the new decors of the MAMMUT PLUS collection from Kronotex. While exhibiting the same technical mastery as all MAMMUT flooring, this offers you even more authenticity, an even larger choice of styles and even greater perfection. Apart from its incredible robustness and versatility, MAMMUT PLUS also raises the bar in other ways. Its extra-wide panels complement the existing extra-long and extra sturdy versions of the MAMMUT family. The decors seduce you with their elegantly authentic natural wood look, which cannot help but add posh country style comfort to your home.

THICKNESS: 10 mm

BOARD SIZE: 1845 X 244 X 10 mm **BOX QUANTITY:** 4 Panels / 1.80 m² **WARRANTY:** 30 Year Residential

USE CLASS: 33 / AC5 Suitable for high traffic commercial & domestic everyday use.



























Our Mammut ranges now have an improved moisture guard core board which gives enhanced anti swelling performance over standard laminates. *Not suitable for outdoor use or rooms with permanently high moisture, e.g. shower cubicles, wet rooms, saunas and rooms with floor drains.*

NOTE: Matching stair nosing available for Everest Oak Beige / Mountain Oak Grey / Mountain Oak Beige / Mountain Oak Nature & Macro Oak Brown - See Page 96








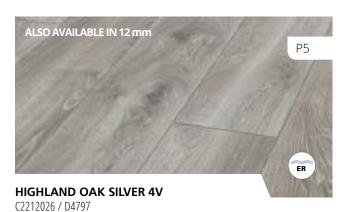







10MM **MAMMUT PLUS 4V** LONG, WIDE PLANK THICKNESS: 10 mm


BOARD SIZE: 1845 x 244 x 10 mm **BOX QUANTITY:** 4 Panels / 1.80 m² **WARRANTY:** 30 Year Residential


USE CLASS: 33 / AC5

Suitable for high traffic commercial & domestic everyday use.





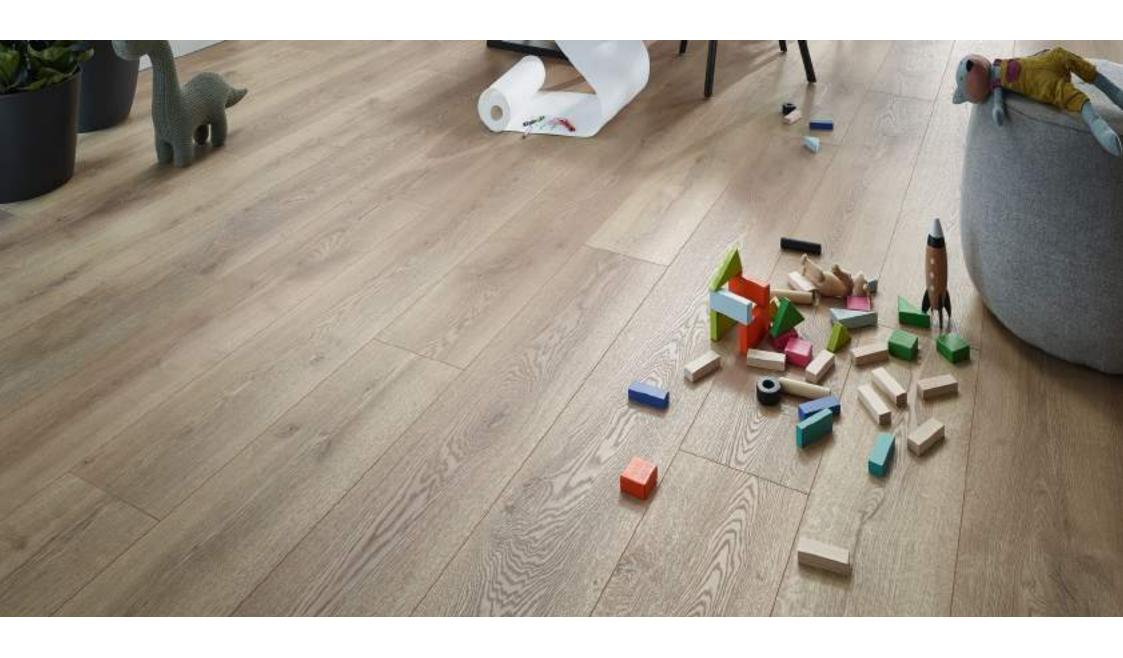



12MM MAMMUT LONG PLANK

Perfection comes in many guises and none more so than in our 12mm Mammut Long Plank from Kronotex. It combines the best features of ROBUSTO, DYNAMIC and EXQUISIT ranges. Whether used universally, for extremely heavy loads or to create a sophisticated and natural look, MAMMUT is a floor which can meet all requirements. The panels are extra hard, extra long and, what's more, extra practical. An outstanding feature of the patterns and hues is their country cottage character and the fascinating, authentic natural wood look.

THICKNESS: 12 mm

BOARD SIZE: 1845 X 188 X 12 mm **BOX QUANTITY:** 4 Panels / 1.387 m² **WARRANTY:** 30 Year Residential

USE CLASS: 33 / AC5 Suitable for high traffic commercial & domestic everyday use.






































Our Mammut ranges now have an improved moisture guard core board which gives enhanced anti swelling performance over standard laminates. *Not suitable for outdoor use or rooms with permanently high moisture, e.g. shower cubicles, wet rooms, saunas and rooms with floor drains.*

NOTE: Matching Stair nosing available in Highland Oak Silver / Macro Oak Beige / Macro Oak Grey / Macro Oak Nature & Macro Oak White See Page 96













Brochure images are representative of actual floors however may vary slightly. We always recommend visiting your local stockist to view physical samples before selection.



THICKNESS: 12 mm

BOARD SIZE: 1845 x 188 x 12 mm **BOX QUANTITY:** 4 Panels / 1.387 m² **WARRANTY:** 30 Year Residential

USE CLASS: 33 / AC5

Suitable for high traffic commercial & domestic everyday use.

12MM MAMMUT MOUNTAIN OAK BEIGE

Classic aesthetics and functionality are successfully combined to create the Mammut range. Anyone who appreciates the unmistakable, natural looking appearance of oak planks and at the same time wants durability will find Mammut meets both requirements. The perfection of the manufacturing process is regarded as the benchmark for high quality laminate flooring.




















TRITTY 100 GRAN VIA 4V



the greatest for your home

Extra long, extra wide, particularly authentic: a genuine trendy product with a length of 2200 mm and a width of 243 mm. Our boards in Gran Via format create an amazing, spacious appearance. The characteristic look of Gran Via planks is emphasised by bevelled edges: the edges of the planks are chamfered on all four sides. This way, the plank character is emphasised in an impressively vivid way – just like real engineered flooring.

The Gran Via 4V design makes rooms remarkably more spacious and gives them a POWERFUL RADIANCE, regardless of the style. This makes the floor a key element for an ambience of openness.

HARO Laminate Floors have double moisture protection thanks to their well balanced multilayer construction and unique aquaTec system.

THICKNESS: 8 mm

BOARD SIZE: 2200 X 243 X 8 mm **BOX QUANTITY:** 5 Panels / 2.68 m² **WARRANTY:** 25 Year Residential

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.






















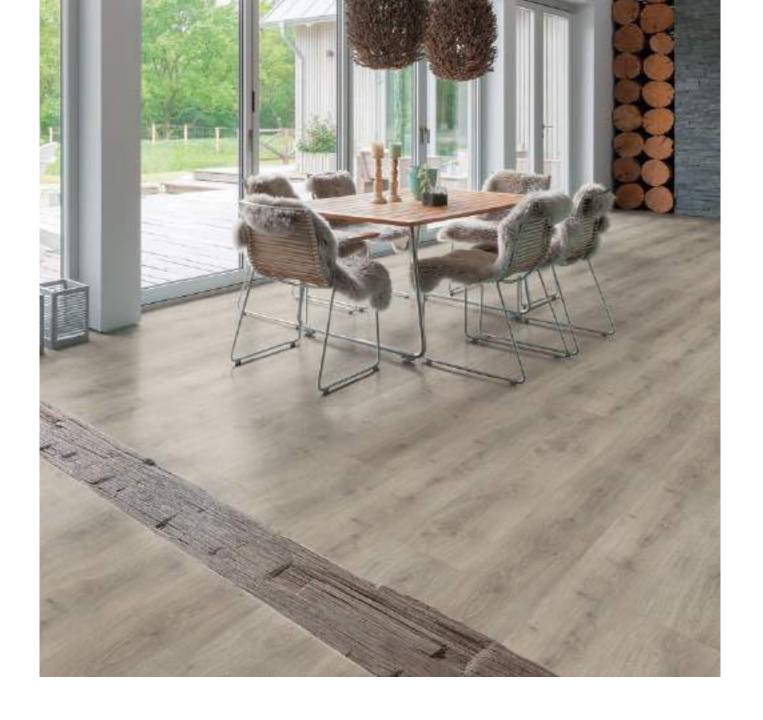

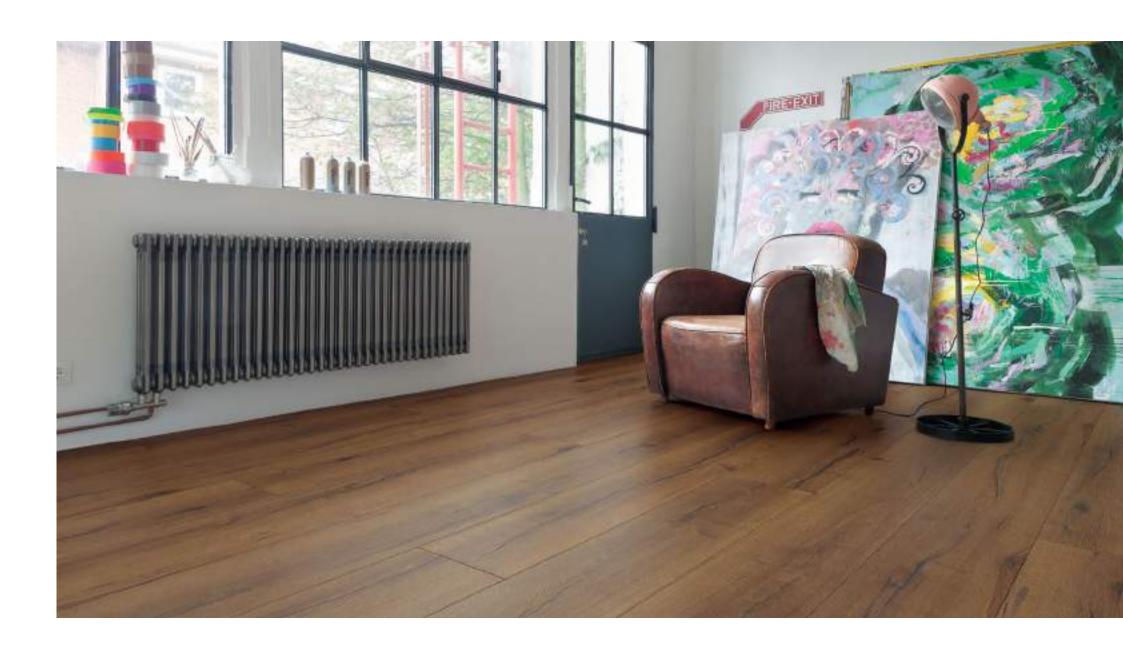

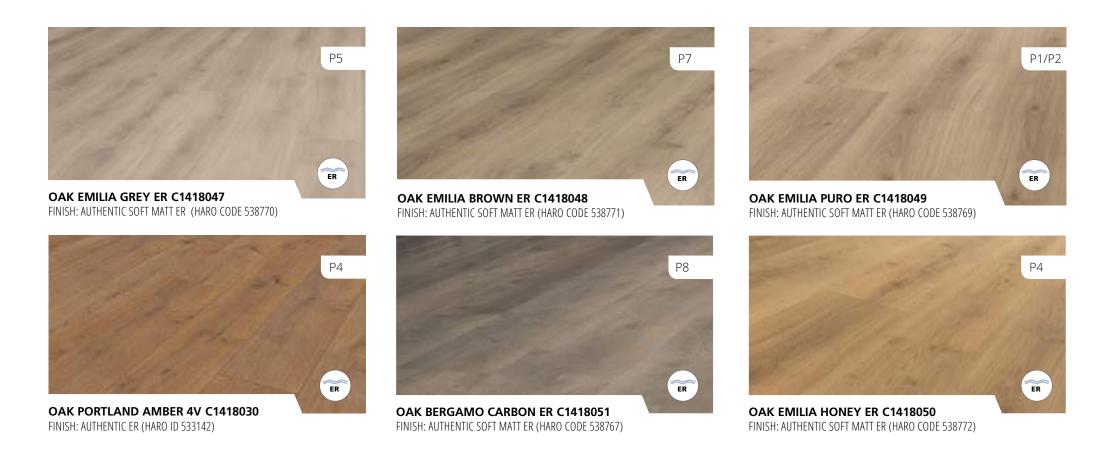

N.B. While laminate floors are hard wearing and have a high degree of scratch resistance, they are not completely scratch proof and care should be taken to protect your floor surface. It is always beneficial to use protective felt pads under moveable furniture, chairs, table legs, doormats in entrances etc. (to protect your laminate floor against moisture, dirt and sand). Please note that wear and tear on darker coloured laminates or high shine surfaces may be more visible.















Thanks to their well-balanced multilayer construction combined with the aquaTec edge impregnation and AquaResist core board, HARO Laminate Floors remain stable and highly resistant to moisture swelling.

Brochure images are representative of actual floors however may vary slightly. We always recommend visiting your local stockist to view physical samples before selection.



THICKNESS: 8 mm

BOARD SIZE: 2200 x 243 x 8 mm

BOX QUANTITY: 5 Panels / 2.68 m² **WARRANTY:**

25 Year Residential


USE CLASS: 32 / AC4

Suitable for medium commercial & domestic everyday use.









12MM **ROBUSTO**

There are situations in life where one needs a thick skin. Where one has to be very resilient and tough. Which is why ROBUSTO is also the perfect floor for extreme levels of use. With its high-density, 12 mm thick fibreboard and an especially wear-resistant surface, it can cope with pretty much anything to which it is exposed. Even if used for commercial purposes. Its CLIC tongueand-groove connection system will never disappoint in any situation as it was specially developed to hold up under the highest pressure.

THICKNESS:

12 mm

BOARD SIZE: 1375 X 188 X 12 mm **BOX QUANTITY:** 5 Panels / 1.293 m² **WARRANTY:** 30 Year Residential

33 / AC5 Suitable for high traffic commercial & domestic everyday use. **USE CLASS:**























Our *Robusto ranges now have an improved moisture guard core board which gives enhanced anti swelling performance over standard laminates. Not suitable for outdoor use or rooms with permanently high moisture, e.g. shower cubicles, wet rooms, saunas and rooms with floor drains. *Excludes American Walnut.

12MM **ROBUSTO** 4V

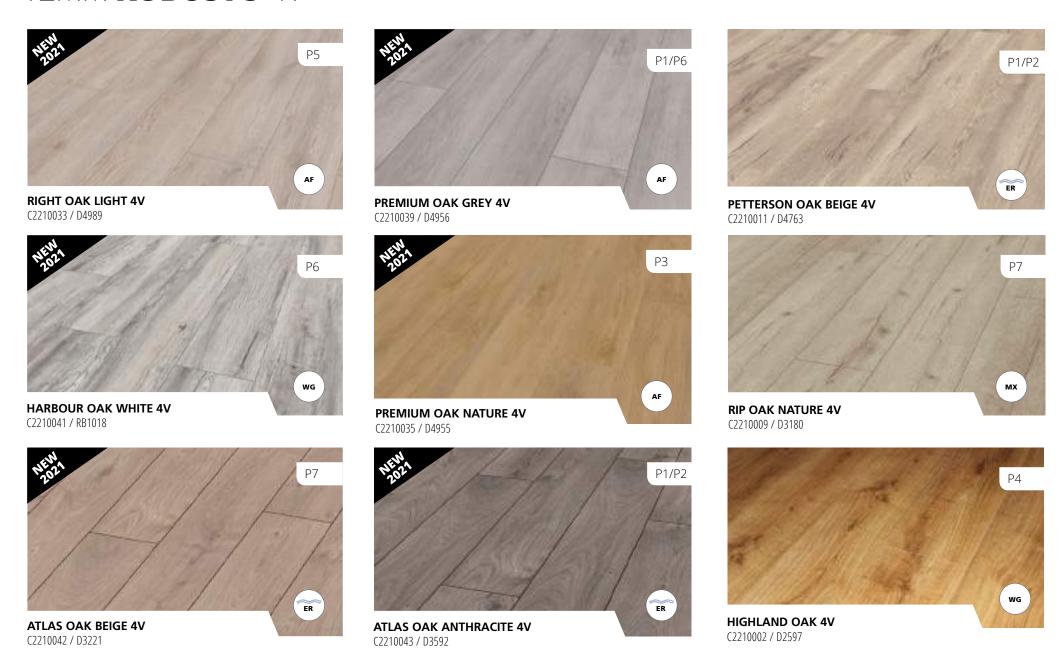

NOTE: Matching stair nosing available for Harbour Oak Grey / Harbour Oak / Highland Oak & Timeless Oak Grey - See Page 96
32 | Whiteriver Flooring Collections

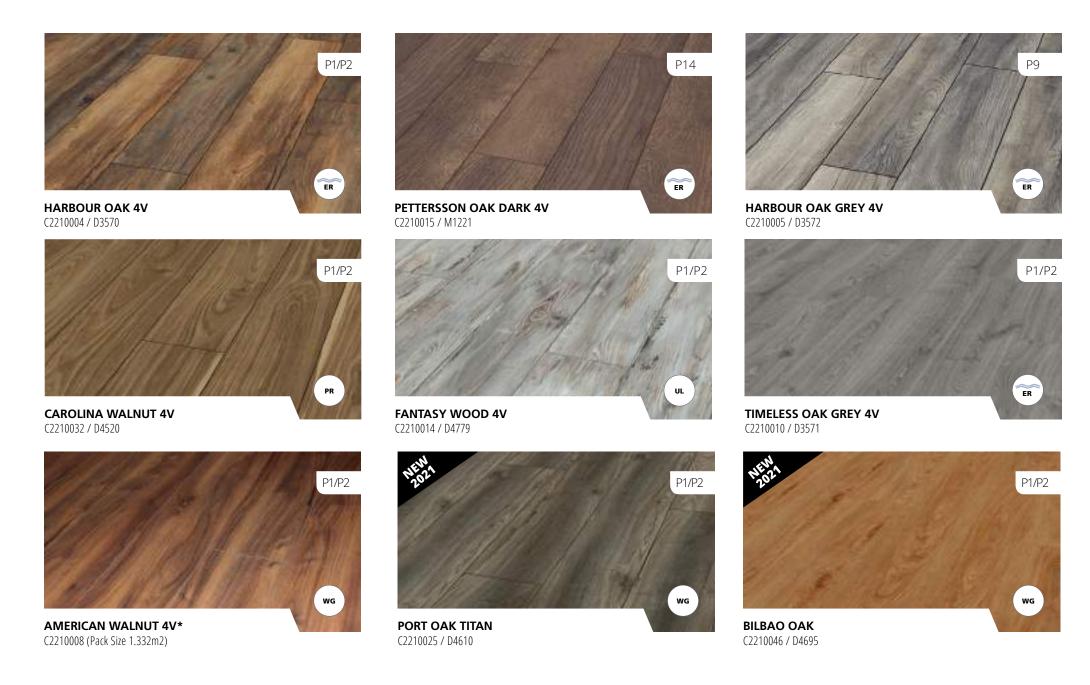







Whiteriver Flooring Collections 12 mm Robusto 4V / Bilbao Oak - See Page 37

36



12 mm Robusto 4V / Port Oak Titan - See Page 37


12MM ROBUSTO RIGHT OAK LIGHT

Robusto is the right choice for load bearing capacity. A high density 12 mm thick plank and 5G click system developed for maximum resistance combined with a strong wear layer makes it very hard wearing. This is a floor that can cope with the daily demands of both domestic and commercial settings while retaining it's original beauty. Robusto has fast become the popular choice for all round performance.












12 mm Robusto 4V **/ Fantasy Wood - See Page 33**Whiteriver Flooring Collections





12MM **EVOLUTION** 4V

Luxurious, luscious and longevity are just some of the aspects of this stylish Evolution range. Contrasting styles, colours and textures, combined with a strong AC4 abrasion class and 5G Click System makes this range the perfect choice for any location.

THICKNESS: 12 mm

BOARD SIZE: 1375 X 188 X 12 mm (1.293 m² PACK)

WARRANTY: 25 Year Residential

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.


















Whiteriver Flooring Collections 12 mm Evolution 1 Oak Honey

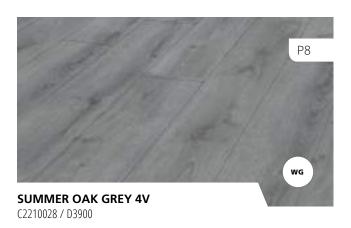





Our Evolution range now has an improved moisture guard core board which gives enhanced anti swelling performance over standard laminates.

Not suitable for outdoor use or rooms with permanently high moisture, e.g. shower cubicles, wet rooms, saunas and rooms with floor drains.



THICKNESS: 12 mm

BOARD SIZE: 1375 X 188 X 12 mm (1.293 m² PACK)

WARRANTY: 25 Year Residential


USE CLASS: 32 / AC4

Suitable for medium commercial

& domestic everyday use.



Whiteriver Flooring Collections 10 mm Metro Plus 4V **I Chestnut - See Page 47**



10MM METRO 4V

Our METRO range is a unique collection of specially selected decors of varying tones. A 10 mm board with a hard wearing AC4 / AC5 means the floor will stand up to the toughest demands. The range sets new trends and defines the avant-garde while creating modern classics.

THICKNESS: 10 mm

33 / AC5 Suitable for high traffic commercial & residential everyday use.

32 / AC4 Suitable for medium commercial & domestic everyday use.




















*High Shine Sorrento & Tirana Hickory

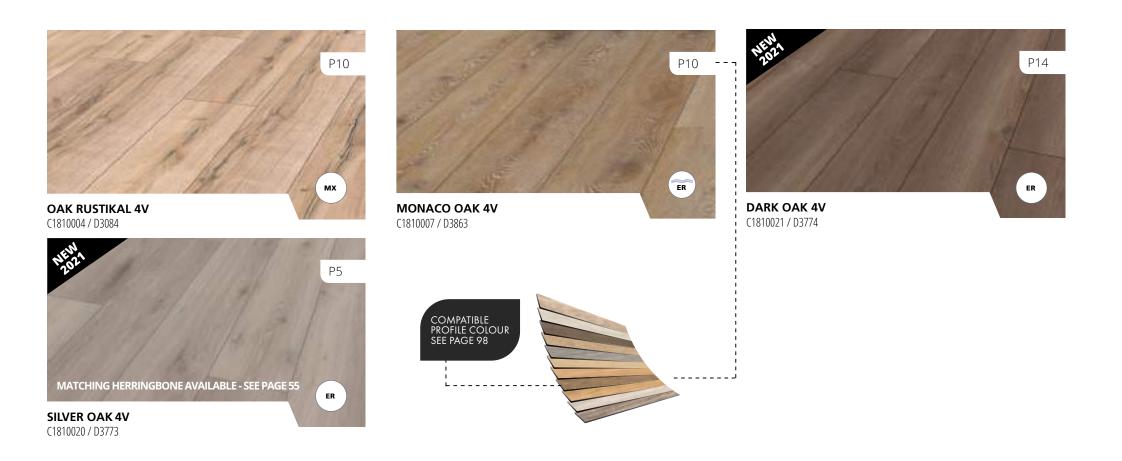

N.B. While laminate floors are hard wearing and have a high degree of scratch resistance, they are not completely scratch proof and care should be taken to protect your floor surface. It is always beneficial to use protective felt pads under moveable furniture, chairs, table legs, doormats in entrances etc. (to protect your laminate floor against moisture, dirt and sand). Please note that wear and tear on darker coloured laminates or high shine surfaces may be more visible.









Our Metro AC5 range now has an improved moisture guard core board which gives enhanced anti swelling performance over standard laminates.

Not suitable for outdoor use or rooms with permanently high moisture, e.g. shower cubicles, wet rooms, saunas and rooms with floor drains.



THICKNESS: 10 mm


BOARD SIZE: 1380 x 193 x 10 mm **BOX QUANTITY:** 6 Panels / 1.60 m² **WARRANTY:** 30 Year Residential

USE CLASS: 33 / AC5

Suitable for high traffic commercial & residential everyday use.



Whiteriver Flooring Collections 10 mm Metro AC4 4V **I Aged Ash**

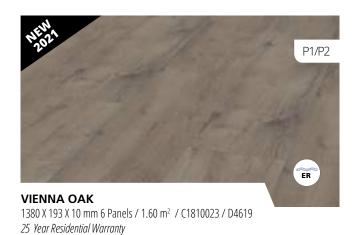





10MM METRO AC4 4V

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.









DROP LOCK SYSTEM

Our Sorrento Oak & Tirana Hickory floors feature a "drop lock" click system.

We do not recommend underlays thicker than 3mm for these floors.

N.B. While laminate floors are hard wearing and have a high degree of scratch resistance, they are not completely scratch proof and care should be taken to protect your floor surface. It is always beneficial to use protective felt pads under moveable furniture, chairs, table legs , doormats in entrances etc. (to protect your laminate floor against moisture, dirt and sand). Please note that wear and tear on darker coloured laminates or high shine surfaces may be more visible.





THICKNESS: 10 mm

BOARD SIZE: 1380 x 159 x 10 mm **BOX QUANTITY:** 8 Panels / 1.76 m²

WARRANTY: 25 Year Residential

USE CLASS: 32 / AC4

Suitable for medium commercial & residential everyday use.

















































8MM HERRINGBONE LAMINATE

The classic Herringbone design can be traced back to the Romans who used the design in the construction of roads to add strength. The pattern became know as "Herring - Bone" as it resembles the outline of a fish skeleton. The Renaissance periods between the 14th and 17th centuries saw the design being used in many aspects of architectural design including flooring.

Traditional real wood Herringbone has long been a desirable choice to add a touch of class to any room or entrance hallway. Laminate manufacturing expertise has now been developed to bring you a high quality affordable alternative.



THICKNESS: 8 mm

BOARD SIZE: 665 X 133 X 8 mm **BOX QUANTITY:** 14 Panels / 1.238 m² **WARRANTY:** 25 Year Residential

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.

INSTALLATION: Valinge Click System



























Our <u>Herringbone</u> ranges now have an improved moisture guard core board which gives enhanced anti swelling performance over standard laminates. *Not suitable for outdoor use or rooms with permanently high moisture, e.g. shower cubicles, wet rooms, saunas and rooms with floor drains.*



MATCHING PLANKS -





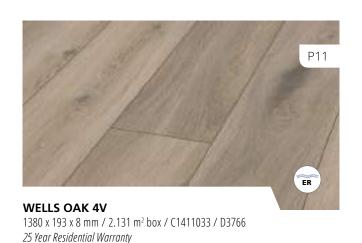



25 Year Residential Warranty

30 Year Residential Warranty









MATCHING PLANKS










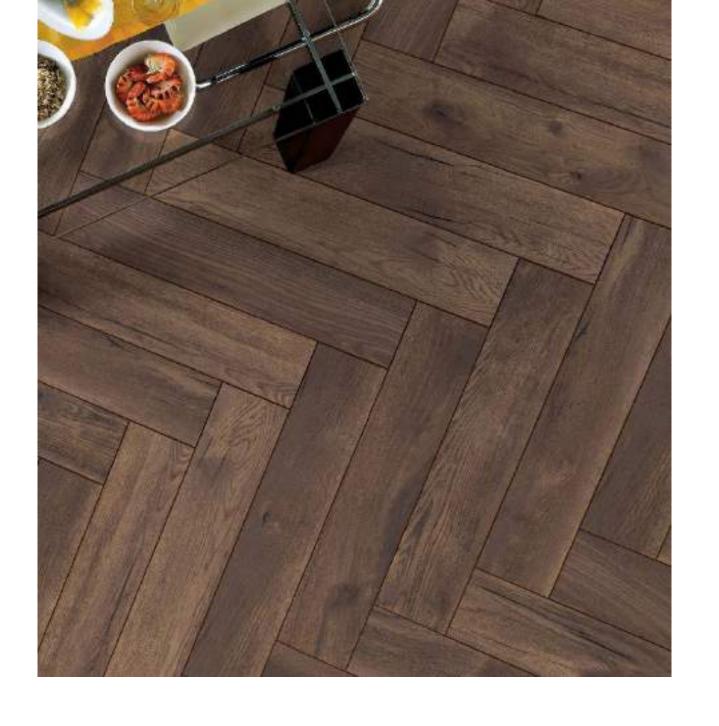



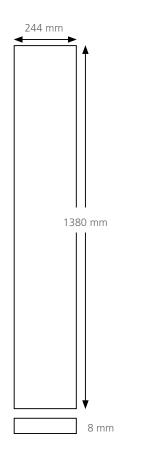

8MM **EXQUISIT PLUS WIDE**

Exquisit Plus Wide 4V - 244mm wide boards give an expansive feel to any room. Spaciousness and elegance go hand in hand to create an exquisit ambience. Exquisit plus wide 4V floors feature embossed in register surfaces for that realistic wood look from a laminate floor. Exquisit plus wide features a 4V four way bevel on all edges.

THICKNESS: 8 mm

BOARD SIZE: 1380 X 244 X 8 mm **BOX QUANTITY:** 8 Panels / 2.694 m² **WARRANTY:** 25 Year Residential

32 / AC4 Suitable for medium commercial & domestic everyday use. **USE CLASS:**


















Whiteriver Flooring Collections 8 mm Exquisit Plus Wide **I Madrid Oak**

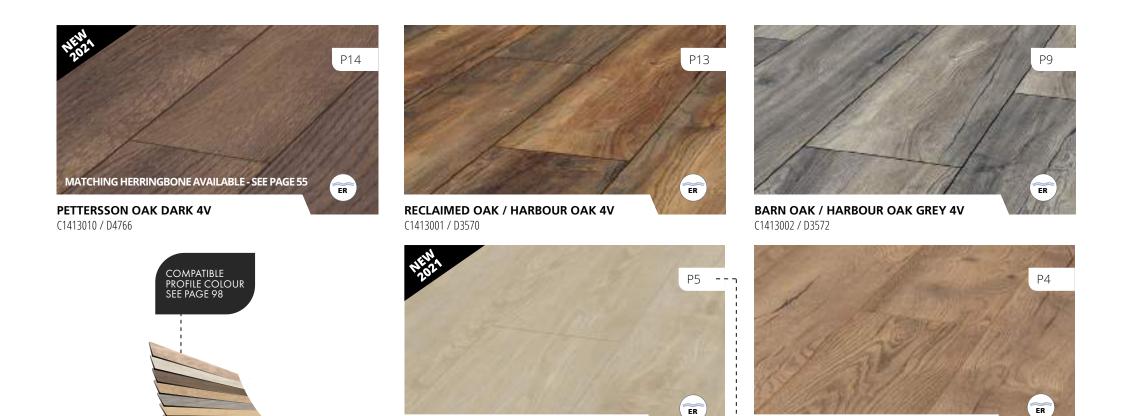

MADRID OAK 4V

C1413018 / D4694

EXQUISIT PLUS WIDE 4V 244MM

THICKNESS: 8 mm

PETTERSSON OAK NATURE 4V

C1413005 / D4764

BOARD SIZE: 1380 x 244 x 8 mm **BOX QUANTITY:** 8 Panels / 2.694 m² **WARRANTY:** 25 Year Residential

USE CLASS: 32 / AC4

Suitable for medium commercial & domestic everyday use.










8MM EXQUISIT PLUS WIDE 4V

Wide plank floors are a real classic that never lose their appeal. Our Exquisit collection brings this traditional charm to your home with its unique 244 mm wide board. Exquisit radiates cosiness every day with a natural appearance of solid wood. Thanks to the embossed wood grain effect the floor is both elegant and authentic.





8MM **DYNAMIC**

A floor with which you can express your entire individuality. DYNAMIC 4V can be used anywhere, is extremely resilient and above all else, offers a unique variety of patterns and hues. Whether you choose the rich, dark hues of Augusta Walnut or the traditional tones of Irish Oak, you will be assured of a stunning floor whose performance matches its good looks. DYNAMIC 4V features a 4V four way bevel on all edges.

THICKNESS: 8 mm

BOARD SIZE: 1380 X 193 X 8 mm **BOX QUANTITY:** 8 Panels / 2.131 m² **WARRANTY:** 25 Year Residential

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.


















8 mm Dynamic 4V **I Smoked Oak - See Page 69**Whiteriver Flooring Collections

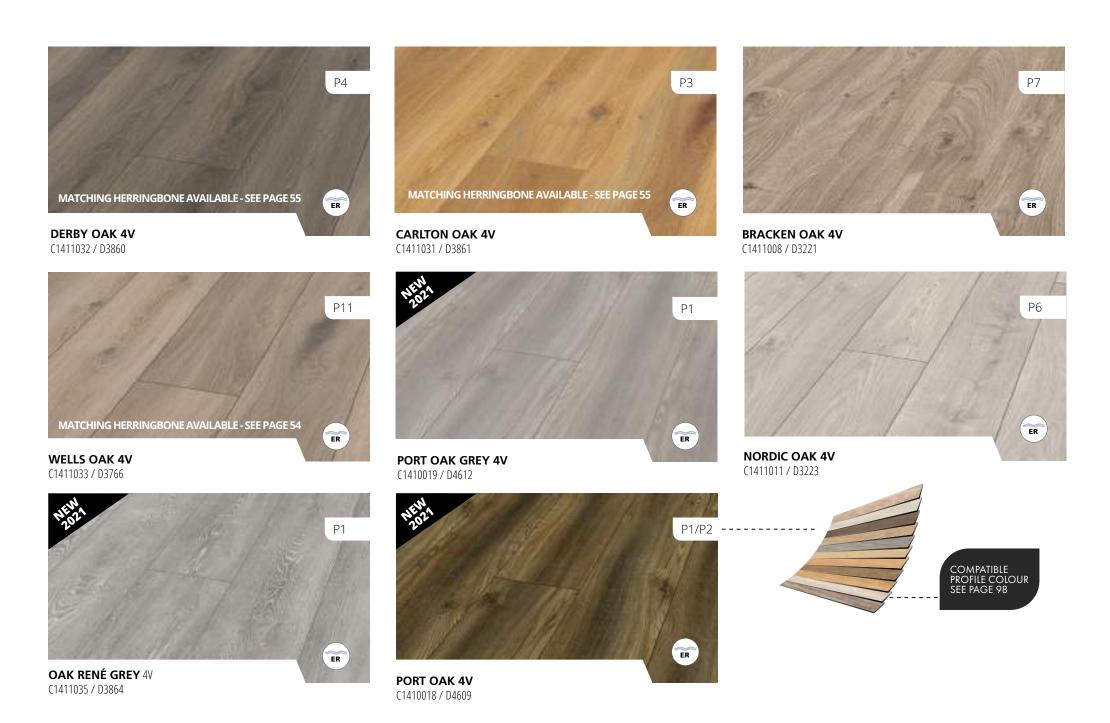















THICKNESS: 8 mm

BOARD SIZE:1380 X 193 X 8 mmBOX QUANTITY:8 Panels / 2.131m²WARRANTY:25 Year Residential

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.










Whiteriver Flooring Collections 8 mm Excel 4V I Welsh Oak - See Page 75

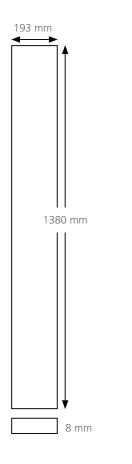

8MM **EXCEL** 4V

The EXCEL 4V range will win you over with its unique range of three brand new decors. 8 mm boards with AC4 abrasion class rating can be used throughout the home, bringing a natural and durable wood look to your home's spaces. Floors that are made to be enjoyed for a long time. EXCEL 4V features a 4V four way bevel on all edges.

THICKNESS: 8 mm

BOARD SIZE: 1380 X 193 X 8 mm **BOX QUANTITY:** 8 Panels / 2.131 m² **WARRANTY:** 25 Year Residential

USE CLASS: 32 / AC4 Suitable for medium commercial & domestic everyday use.
















| Whiteriver Flooring Collections 8 mm Excel 4V / Porter Oak

74

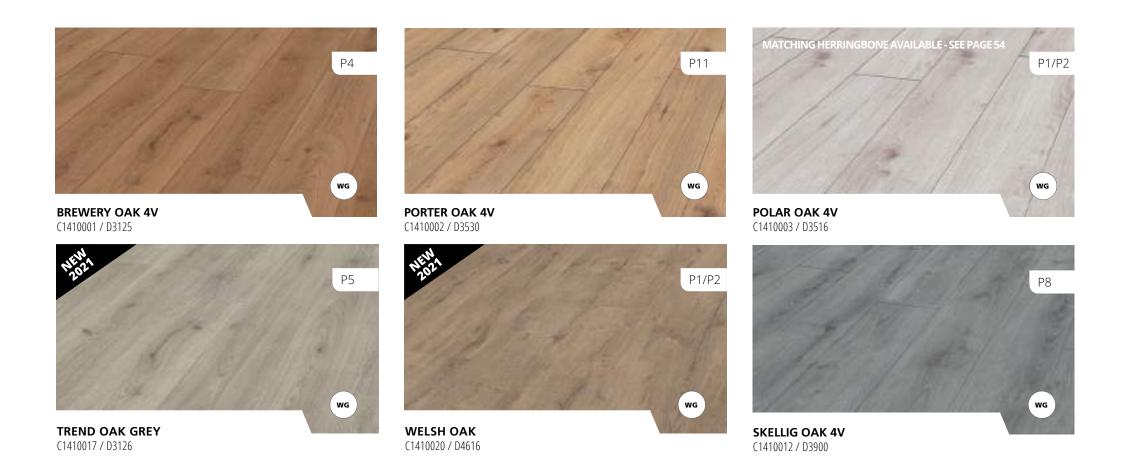




THICKNESS: 8 mm

BOARD SIZE: 1380 X 193 X 8 mm BOX QUANTITY: 8 Panels / 2.131m² WARRANTY: 25 Year Residential

USE CLASS: 32 / AC4

Suitable for medium commercial & domestic everyday use.



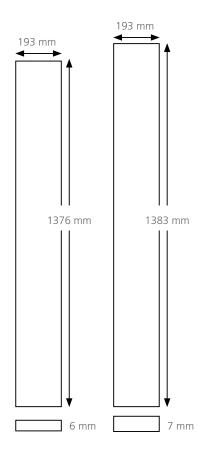

6MM & 7MM

Enjoy decorating your home to your own individual tastes. A SMART laminate floor features an outstanding price/performance ratio. The warmth and look of a real wood floor with the reliability and convenience of a laminate floor. The SMART range features a plank, a two strip and one 3-strip decors. All floors in the SMART range are square edge. Excellent value combined with warm, inviting wood decors make SMART a wise choice for any home. A price conscious and classic choice for your room that does not compromise on style or elegance. The SMART 4V range features three attractive oak plank decors. SMART 4V features a 4V four way bevel on all edges.

THICKNESS: 6 & 7 mm

BOARD SIZE: 1376 X 193 X 6 mm

1383 X 193 X 7 mm

BOX QUANTITY: 6MM 11 Panels / 2.921m²

7MM 9 Panels / 2.397m²

WARRANTY: 6 mm 6 Year Residential

7 mm 20 Year Residential

USE CLASS: 23 / AC3 (6 mm) Suitable for high traffic domestic everyday use.

31 / AC3 (7 mm) Suitable for light commercial & domestic everyday use.




















Whiteriver Flooring Collections 7 mm Smart 4V **I Burren Oak**

78

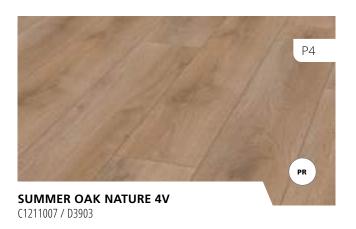

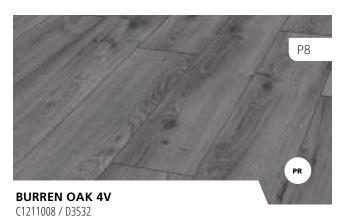





7MM SMART 4V

THICKNESS: 7 mm

BOARD SIZE: 1383 X 193 X 7mm **BOX QUANTITY:** 9 Panels / 2.397 m² **WARRANTY:** 20 Year Residential


USE CLASS: 31 / AC3 Suitable for light commercial & domestic everyday use.



Whiteriver Flooring Collections 7 mm Smart / Ticino Walnut

80









THICKNESS: 7 mm

BOARD SIZE: 1383 X 193 X 7 mm BOX QUANTITY: 9 Panels / 2.397 m² WARRANTY: 20 Year Residential

USE CLASS: 31 / AC3 Suitable for light commercial & domestic everyday use.



Whiteriver Flooring Collections 6 mm Smart / Summer Oak Light Grey







THICKNESS: 6 mm


BOARD SIZE: 1376 X 193 X 6 mm

BOX QUANTITY: 11 Panels / 2.921 m²

WARRANTY: 6 Year Residential

USE CLASS: 23 / AC3


Suitable for high traffic domestic everyday use.

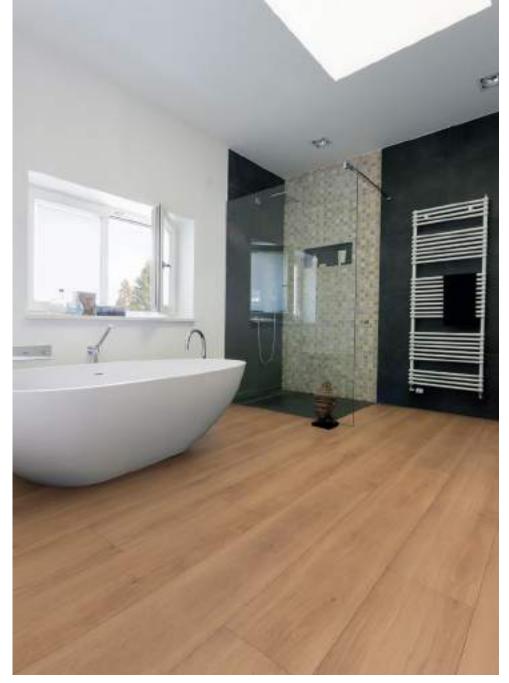

HARO Disano Classic Aqua I Field Oak Textured - See Page 87



New Generation Flooring suitable for Kitchens & Bathrooms. No underlay is required, manufactured with integrated Cork Underlay which reduces room and footfall sound as well as optimised walking comfort.



9.3MM DISANO AQUA CLASSIC



The moisture resistant design floor for healthy living.

Disano Floors are right on trend and combine the positive features of engineered and laminate floors. They are soft, warm underfoot, hard-wearing, easy-care, quiet - and in addition, they promote healthy living. They are free of PVC, plasticizers, and phthalates and have received the Blue Angel label and Eco seal. Thanks to the additional ElastoTec layer, DISANO Classic provides a pleasantly soft walking feeling. The AquaReject core board based on natural materials is particularly resistant against swelling, making it a great alternative to tiles in bathrooms or kitchens. **The only requirement is glue-down installation in kitchens and bathrooms for water resistant rating.** DISANO Classic Aqua is available in lively, vibrant styles as well as classic, elegant colour variants.

THICKNESS: 9.3 mm

BOARD SIZE: 2035 X 235 X 9.3 mm **BOX QUANTITY:** 5 Panels / 2.39 m² **WARRANTY:** 25 Year Residential

USE CLASS: 33 / AC5 Suitable for high traffic commercial & domestic everyday use.




















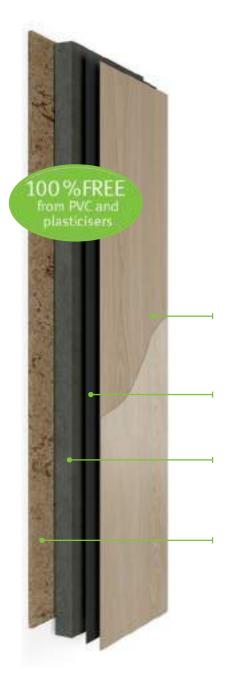

A moisture resistant high density fibreboard (HDF) with built in cork underlay and durable decorative surface.

DISANO Classic Aqua in trendy Plank 1-Strip format can also be installed in wet rooms (A0) if glued down. With its AquaReject core board based on natural materials it is especially resistant to moisture.

Soft and durable decorative surface layer

Authentic wood appearance. The surface layer is resilient, soft and pleasantly warm, protects the floor and ensures excellent durability and ease of maintenance. Resistant to fading under UV light – no colour change.

Pressure Distribution Layer

Semi-flexible, water-resistant and free from PVC and plasticisers. The ElastoTec layer provides additional elasticity and walking comfort. It protects the floor from dents and penetrating moisture while ensuring improved stability.

Core board with moisture protection (5 mm)


The AquaReject core board based on natural materials is particularly resistant against swelling. This is why DISANO Classic Aqua is also suitable for glue-down installation in damp rooms (A0).

Integrated cork insulation underlay

High-density cork insulation underlay for room and footfall sound reduction as well as for optimum walking comfort (1.2mm). No additional insulation underlay needed. Suitable for use with underfloor heating: Thermal resistance 0.063 $\,\mathrm{m}^2$ K/W.



COUNTRY OAK GREY RUSTIQUE TEXTURED 4V
C1418042 (HARO ID 536251)

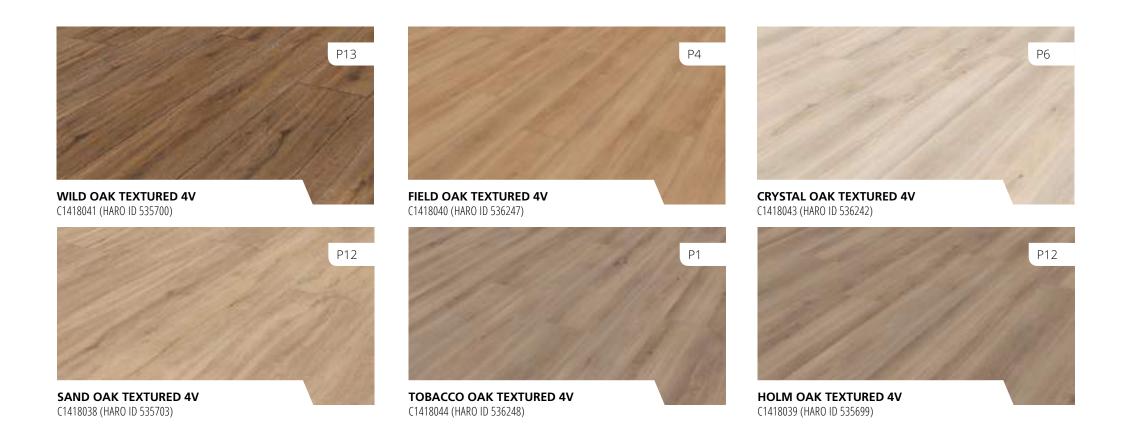

Note: It is very important that this product is acclimatised for 3 days prior to installing. This will allow the ElastoTec Layer to adjust. Please follow full installation details.



THICKNESS: 9.3 mm


BOARD SIZE: 2035 x 235 x 9.3 mm BOX QUANTITY: 5 Panels / 2.39 m²

WARRANTY: 25 Year Residential

USE CLASS: 33 / AC5

Suitable for high traffic commercial & domestic everyday use.



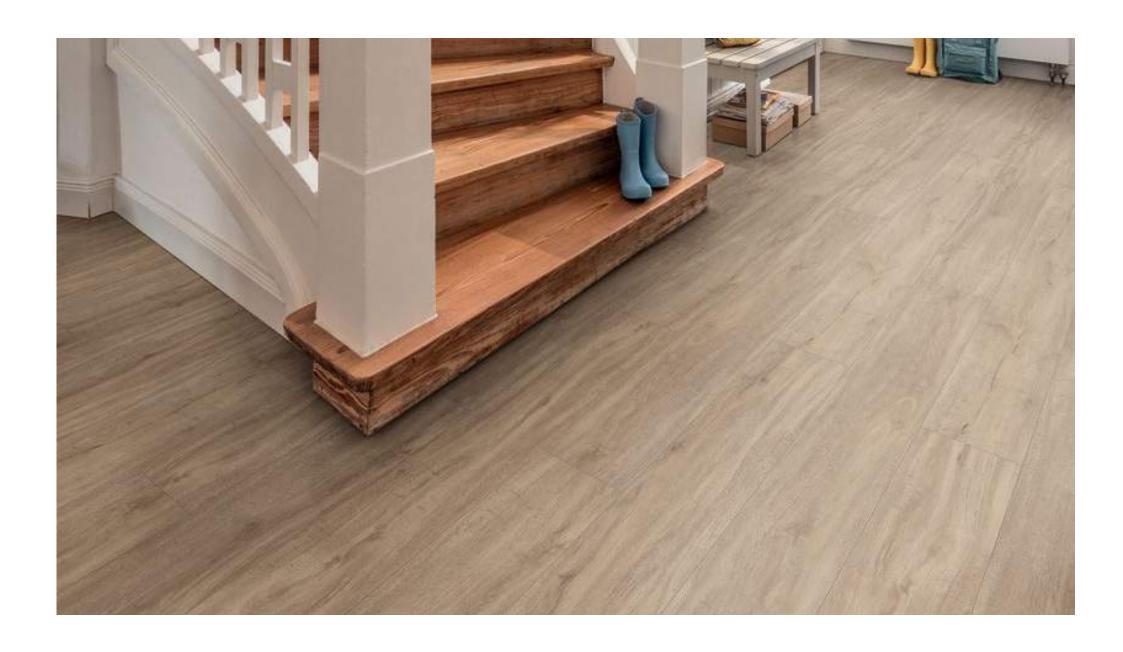


Underlays

Underlay is the foundation to all professional floor installations therefore it is essential that the correct product is specified to suit conditions and customer expectations of performance. We recommend using a good quality underlay for all hard subfloors, whether they are made of cement, wood substrate, ceramic or synthetic. You consequently increase the resilience of the floor, absorb indoor and footfall sound and level minor irregularities in the subfloor. We recommend that you use polythene over concrete subfloors in addition to underlay.

Note: Always sweep and clean floor before placing the underlay down.

	El Company				
Name	2mm White Foam	2mm Cork	2mm Heat Master Perforated	3mm Acoustic Blue	
Code	F1010035 / F1010030	F1010004	F1010014	F1010007	
Coverage Per Roll/Pack	15 / 25m ²	20m²	10m²	10m²	
Roll Size	3mm x 1m x 15 / 25m	2mm x 1m x 20m	2mm x 1m x 10m	3mm x 1m x 10m	
TOG Rating	0.62	0.41	0.35	0.88	
Impact Sound Reduction	16dB	17dB	20dB	22dB	
Underfloor Heating	★ Do not use	✓ Do not use	✓	✓ ≤ 8mm Laminate only	
Compressive Strength	Poor	Good	Very Good	Very Good	
Heat Transfer Resistance	0.062 k/w m²	0.041 k/w m²	0.035 k/w m²	0.088 k/w m²	
Rolls per Pallet	64 / 48	24	72	56	

^{*}Contact our technical department for more information.

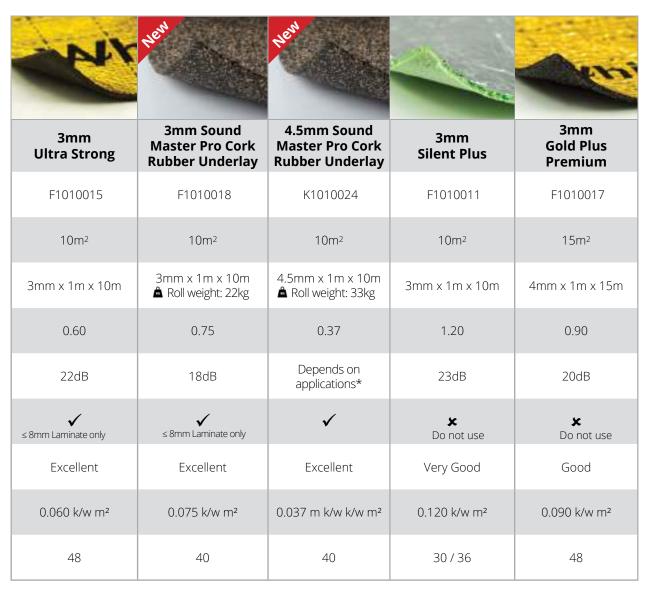



^{*}Contact our technical department for more information.



REVITA LIZE

Timber floors need a minimum 10mm expansion gap around all edges where the floor is meeting skirting or fixed structures such as kitchen islands. This is essential for natural movement of the floor as room temperatures change throughout the year. The quick fix DIY solution is to leave a gap at existing skirting and cover with a small angled piece of timber known as "scotia". The professional installer and discerning home owner will take the opportunity to add another dimension to their project by replacing the skirting and cutting the base of the door frame. This effectively allows the floor to float under the skirting and door frame for a flawless finish and makes installation easier.



169 X 18 X 4200 mm WHITE **GEORGIAN** SKIRTING PRIMED



144 X 18 X 4200 mm WHITE **DOUBLE SHAKER** SKIRTING PRIMED



94 X 18 X 2200 mm WHITE **GEORGIAN** ARCHITRAVE PRIMED



94 X 18 X 2200MM WHITE **DOUBLE SHAKER** ARCHITRAVE PRIMED




WHITERIVER WHITE PRIMED **GEORGIAN**



WHITERIVER WHITE PRIMED **DOUBLE SHAKER**

White Primed Skirting & Architrave Options

White primed skirting and architrave continue to grow in popularity. Each length is pre-primed ready for you to add your own finish. Choose crisp white for clean lines or contemporary shades to match surrounding decors. Our profiles are made from moisture-resistant MDF.

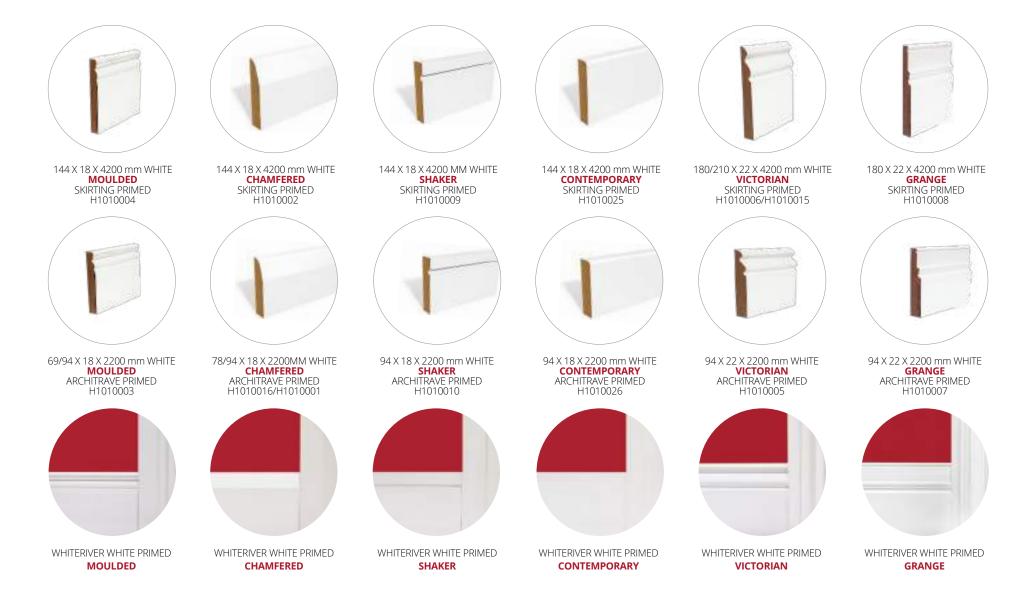

PRE FINISHED ACCESSORIES

SKIRTING BOARDS

Our pre-finished foil wrapped skirting's come in 2.4 m lengths and are perfect for replacing old skirting while the 16 mm scotia's are the ideal size for covering expansion gaps should you wish to leave existing skirting in place. Full range of matching scotia are also available for this range.



WALNUT 120 X 15 X 2400 mm F1411004



SOLID GREY 120 X 15 X 2400 mm F1411005




LIGHT GREY 120 X 15 X 2400 mm F1411009



WHITE 120 X 15 X 2400 mm 140 X 18 X 2400 mm F1411003 / F1411007



NATURAL OAK 120 X 15 X 2400 mm 140 X 18 X 2400 mm F1411002 / F1411006



FOIL WRAPPED SCOTIA DIMENSIONS: 16 X 16 X 2400 mm

SCOTIA






LAMINATE STAIR NOSING SOLUTIONS

Wooden stairs are in line with the latest interior design trends. Puristic furniture and large glass areas correspond with floors, walls and stairs that radiate warmth and provide texture. Our Stair Nosing are made from matching planks. *Available ex stock.*

	Code	Length		
12mm Robusto				
Harbour Oak Grey	C3000001	1300mm		
Harbour Oak	C3000051	1300mm		
Highland Oak	C3000100	1300mm		
Timeless Oak Grey	C3000151	1300mm		
10mm Mammut				
Highland Oak Silver	C3000301	1800mm		
Macro Oak Beige	C3000351	1800mm		
Macro Oak Grey	C3000401	1800mm		
Macro Oak Nature	C3000451	1800mm		
Macro Oak White	C3000501	1800mm		
12mm Mammut				
Everest Oak Beige	C3000700	1800mm		
Mountain Oak Grey	C3000731	1800mm		
Mountain Oak Beige	C3000750	1800mm		
Mountain Oak Nature	C3000800	1800mm		
Macro Oak Brown	C3000830	1800mm		











HARO offer an ideal solution to individually match each of their floor decors for contemporary interior stair design. Choose between flush connection on stair tread and riser or traditional overlap joint on riser.

HARO Tritty 100 Gran Via Stair Nosing 8mm

- 60 x 60 x 2180 mm Click engages both sides.
- Re-enforced aluminium corner.
- 4 5 week lead time.
- Precision solution for a seamless appearance.
- Available to special order alternatively with overlap joint on riser. Must be specified at time of ordering.

Commercial Two Part Profile

Precision German manufacturing ensures a professional finish for all applications. The base section is secured to the substrate with screws while the top section sits between the tread and riser for a truly robust finish. Matt silver.





Euro Step Stair Nosing 320Silver 2700 mm
Suitable for 7 mm - 16 mm laminates F1625043


FINISHING TOUCHES

Flooring Profiles

BY WHITERIVER

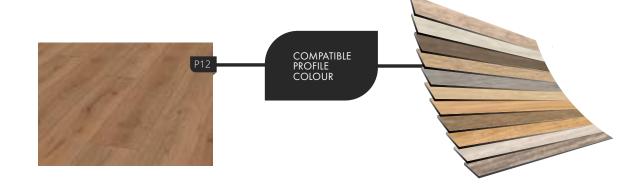








WRG1 FLAT SELF ADHESIVE 900 mm & 1800 mm All Colours






WRG2 REDUCER SELF ADHESIVE 900 mm & 1800 mm All Colours





WRG3 EDGE SELF ADHESIVE 1800 mm





WRG4 SCREW DOWN REDUCER / FLAT 900 mm & 1800 mm Silver & Gold Only

It is important to complete your floor with quality finishing touches. Whiteriver flooring profiles come in a variety of different styles and colours to help create a seamless and streamline look for your installation. AC4 rating ensures a lasting finish.





FINISHING TOUCHES

Commercial Profiles

BY WHITERIVER

Precision German manufacturing ensures a professional finish for all applications. The base section is secured to the substrate with screws while the top section can be adjusted and removed at any time. Suitable for installation in high use commercial areas.



Euro Step Stair Nosing 320 Silver 2700 mm 7 mm - 16 mm F1625043



Transition 561 2 Part Screw Down Anodized Stainless Steel 12 mm - 17 mm F1627009



End 560 2 Part Screw Down Anodized Stainless Steel 12 mm - 17 mm F1627011



Reducer 559
2 Part Screw Down
Anodized Stainless Steel
12 mm - 17 mm
F1627013

Measurement Guide

5.0 m²

7.5 m²

10.0 m²

16'5"

5.om

	Feet&Inches	3'3"	4'11"	6'6"	8'2"	9'10"	11'5"	13'1"	14'9"	16'5"	18'0"
Feet&Inches	Metres	1.0m	1.5M	2.0m	2.5M	3.om	3.5m	4.om	4.5m	5.om	5.5m
3'3"	1.0m	1.0m²	1.5 m²	2.0 m²	2.5 m²	3.om²	3.5 m²	4.0 m²	4.5 m²	5.0 m²	5.5 m²
4'11"	1.5m	1.5 m²	2.3 m²	3.0 m²	3.8m²	4.5 m²	5.3 m²	6.om²	6.8m²	7.5 m²	8.3m²
6'6"	2.0m	2.0 m²	3.om²	4.0 m²	5.0 m²	6.om²	7.0 m²	8.om²	9.0 m²	10.0 m²	11.0 m²
8'2"	2.5m	2.5 m²	3.8 m²	5.0 m²	6.3m²	7.5 m²	8.8 m²	10.0 m²	11.3 m²	12.5 m²	13.8 m²
9'10"	3.om	3.0 m²	4.5 m²	6.o m²	7.5 m²	9.0 m²	10.5 m²	12.0 m²	13.5 m²	15.0 m²	16.5 m²
11'5"	3.5m	3.5 m²	5.3 m²	7.0 m²	8.8 m²	10.5m²	12.3 m²	14.0 m²	15.8 m²	17.5 m²	19.3 m²
13'1"	4.om	4.0 m²	6.0 m²	8.om²	10.0 m²	12.0 m²	14.0 m²	16.0 m²	18.0 m²	20.0 m²	22.0 m²
14'9"	4.5m	4.5 m²	6.8 m²	9.0 m²	11.3 m²	13.5 m²	15.8m²	18.0 m²	20.3 m²	22.5 m²	24.8m²

12.5 m²

15.0 m²

17.5 m²

20.0 m²

22.5 m²

25.0 m²

27.5 m²

Example - Room measuring $3m \times 4.5m = 13.5m^2$





INSTALLATION MADE EASY





Scan here for handy YouTube video installation tips



General Guidelines

- Leave boxes unopened in room for 48 hours prior to installation.
- Inspect all boards in daylight for any visible faults or defects before installation.
- · Check the sub-floor is level and even before installation.
- It is very important to sweep the floor clean. Make sure there is no grit under the underlay.
- Install 0.2 mm/500 gauge polythene on all concrete surfaces to provide a vapour barrier. All polythene joints should be overlapped and taped.
- Consult instructions and website for full details on site conditions and moisture content of subfloor.


The moisture content of cement screeds should be 2.0% CM (3% on red scale Tramex Concrete Encounter). For anhydrite/pump screeds with underfloor heating, the moisture content should be 0.3% CM (1.6% on red scale Tramex Concrete Encounter).


- Use a good quality flooring underlay for your floor.
- Select board direction e.g. towards light or longest room dimension.
- This floor requires no glue and has a simple click system.
- Never install kitchen units / islands on top of floor as this will restrict natural movement and may cause the floor to lift.*
- Install as a floating floor with room for expansion around perimeter.
- Follow installation instructions for first and second row.
- Where the same floor is being installed through adjoining rooms it is important to leave a 10 mm expansion gap under each door and install suitable profile.
- Stagger joints by 300 400 mm thereafter.
- Select finishing profiles, skirting, pipe covers, doorway slips.
- Use felt pads and protective castors underneath furniture legs.
- Please use suitable cleaning products for aftercare.
- Installation instructions may vary. See pack for details.


Note: Sub-floors must be perfectly level to within 1 mm over 1mt before installing laminate herringbone and 3 mm over 1mt for all other laminates. Any variation in floor levels must be corrected prior to installation.

Disano Aqua Classic must be glued down to the base floor achieve water resistant rating.

















^{*} All floors should be broken at the doorway with expansion joint.


Installing your floor




































Step by step Herringbone instructions.

LAMINATE FLOORING AND UNDERFLOOR HEATING? OF COURSE!

Laminate floors are wonderfully compatible with underfloor heating.

As long as you keep just a few things in mind, nothing will prevent you from enjoying cosy warmth in your home.

Water or electric underfloor heating?

Water-based underfloor heating systems are excellently suited for laminate flooring. And these days, most electric systems can also be combined with laminate without problem. It is prudent to play it safe and ask the manufacturer whether their product is in fact compatible with laminate. State-of-the-art electric underfloor heating systems can be used without any concerns. Many older models, however, can only be turned on or off without permitting any intermediate settings. If you are planning to install laminate, the ability to adjust the temperature in steps is important. But talk to the manufacturer! Only they can guarantee the suitability of their system.

Checklist for laminate flooring and underfloor heating

- Follow the instructions of the heating system manufacturer!
- Mineral substrates must be warmed up gradually before installing the flooring, otherwise they might crack or moisture may be permanently trapped inside them.
- Ask a heating installer to test your underfloor and prepare a report on its heating response. This is essential for assessing the screed's suitability for being covered and especially important for floor surfaces that are made of or derived from wood.
- Make sure to heat up the underfloor and allow it to cool off again according to the
 prescribed schedule before installing the laminate. Its surface should be at least 15°C
 when this is done.
- To prevent moisture from rising, lay a polyethylene membrane (0.2mm thick) on a mineral substrate beneath the laminate flooring and any acoustic underlays to serve as a vapour barrier.
- It is best to use acoustic underlays from our range.
- The first time the heating system is used after installing the laminate flooring, as well as at the start of each new heating period, gradually increase the temperature in steps of 5°C per day to the maximum infeed temperature (i.e. the highest temperature of the water or other heat transferring material).
- Do not cover heated areas, as otherwise there is a risk of trapping heat and causing the temperature to rise excessively.
- Make sure that the underfloor heating can be adjusted in steps (i.e. not simply on/off).
 The surface temperature of the laminate flooring should not exceed 26°C.
- If you have electric underfloor heating, ask the manufacturer to confirm its suitability for laminate flooring.

Heat transfer rates depend on thickness

A material's heat transfer coefficient, or u-value, is a measure of how fast heat is transmitted through it. This varies depending on the material's thickness and thermal conductivity. A lower u-value means that more heat is transferred, while a higher one indicates greater resistance to heat flux. The assembly of vapour barrier, acoustic underlay and laminate must not have a value greater than 0.15 (m²*K)/W. A laminate floor's suitability for use with underfloor heating is inversely proportional to its u-value.

HOW TO KEEP YOUR LAMINATE FLOORING LOOKING LIKE NEW

Besides being exceptionally hygienic, laminate floors are quite easy to keep clean and in good condition.

Prevent soiling and wear

Whilst laminate flooring can be cleaned with minimal effort, it is even better to prevent it from being soiled and worn in the first place. Attach small felt glides to the legs of chairs, tables and other pieces of furniture that are frequently moved to avoid scratches and scuff marks. If you have swivelling chairs mounted on casters, make sure that the casters are of soft rubber (the kind sold for hard wood floors). Heavily used areas, like in front of desks, can also be protected with chair mats, which come in a variety of types and colours including transparent. It is also advisable to put a foot mat at your front / back door and lay dirt trapper barrier mats or runners in hallways. If, despite all your precautions, your laminate suffers minor damage such as scratches visit: www.kronotex.com/Laminate-Flooring-Guide/repairing-laminate-flooring

Sweeping, vacuuming and wiping laminate floors

It is easy to remove coarse debris or dirt such as sawdust from installing the floor using a soft broom or a vacuum cleaner fitted with a suitable tool for hard floors. However, as sweeping tends to stir up dust, we recommend vacuuming. To clean off residues and dirt that adhere to the floor, as well as marks left by rubber-soled shoes and furniture, wipe with a damp cloth. It's important that the cloth isn't too wet; it should only be slightly moist so that the floor will quickly dry again afterwards. Too much water is not good for laminate. If anything ever spills on the floor, clean it up right away! Try to wipe lengthwise along the panels. There is no need for any additional treatment.

STEAM CLEANING MACHINES ARE NOT SUITABLE FOR LAMINATE FLOORS.

Suitable cleaning products for laminate flooring

We recommend Clean & Green Intensive Active Cleaner where damp cleaning is required. Add 1/2 a dosage cap to 5 litres of clean water. A damp microfibre mop should then be used to apply the solution. This point is critical to the correct maintenance of your laminate floor. DO NOT clean your floor with excessive amounts of water and always avoid letting water sit on the surface. NEVER use steam mops on laminate floors.

To increase durability and help protect against moisture penetrating from above we recommend Clean & Green Agua Shield.





Ideal ambient conditions for laminate flooring

The best ambient conditions for laminate are a temperature of 20°C to 22°C and relative humidity of 50-60%. A bit more or less than this isn't a problem – these values naturally fluctuate in any case. But if the relative humidity persists at a significantly higher or lower level, we recommend purchasing a dehumidifier or humidifier as the case may be. Besides being good for the laminate, it also creates a healthier, more pleasant indoor climate.

Summary of how to care for laminate flooring:

- Remove loose dirt and debris with a soft broom or vacuum cleaner.
- Use a damp cloth to clean off sticking residues.
- Wipe parallel to the panels' long sides.
- Use a special-purpose laminate cleaner to get rid of stubborn dirt.
- Place felt glides under furniture legs.
- Use soft rubber chair casters.
- Lay dirt trapper mats or runners at entrance doors and in hallways.
- In commercial establishments, use barrier mats, runners etc. to create walk-off zones.



We have a long tradition of working with Architects & Designers on both commercial and residential developments. Along with offering our product range which is displayed on our site, we also offer a bespoke product design service for larger projects, we have expertise dealing in both new design and protected restoration. Our company has worked on many leading projects and have expertise in the following areas.

- Hotels
- Pubs & Restaurants
- Retail
- Residential
- Health care
- College/Universities
- Student accommodation
- Museums

Recent projects of note include Lansdowne Place, Adare Manor Hotel and Golf Resort, Becton Dickinson Research Centre, Mount Juliet Estate, Hanover Quay, Tayto Park, Cliff House Hotel, Kerry Group H.Q., Carechoice Nursing Home, UCC Student Campus.

Our company is both FSC & PEFC certified and we also follow and comply with EU policy on the importation and sale of wood products. If you require any further information for product specification, or simply want to discuss our product offering we are more than happy to help you. We also have a full product showroom in Dunleer, Co. Louth, which is available by appointment. Please do not hesitate to contact us to discuss any requirements you may have. Tel: 041 686100 or sales@wrg.ie





