



Rawlplug General Catalogue

100 years
1919-2019

RAWLPLUG®



From London to Mars
in **100** years

- 1919 beginning of the Rawlplug brand
- 1930 1st Mechanical Anchor
- 1948 1st Metal Drywall Anchor
- 1998 1st British company to obtain the ETA certification
- 2012 Rawlplug on the planet MARS (Curiosity Rover)
- 2019 Rawlplug's 100th anniversary

100 years 1919-2019 **RAWLPLUG**[®]

Everywhere in the world

Rawlplug is the global brand of first choice. In the everyday pursuit of Rawlplug's vision, we keep the promise expressed in our mission, as we support our customers with state-of-the-art products they can trust without reservations. Having chosen them, you receive a guarantee that buildings and facilities visited daily by thousands of people not only look great, but are absolutely safe to use. We can proudly claim that, over the last 100 years, Rawlplug has become an unsung hero of numerous investment projects completed all over the world.

100 YEARS OF EXPERTISE IN FIXINGS, FASTENERS AND TOOLS

Rawlplug General Catalogue

Rawlplug Offer 12
Heritage. Product. Services. Training

Power tools 28
Range of cordless power tools with Li-Ion technology.

Power tool accessories 42
Comprehensive and complementary portfolio of accessories for top-quality fixing solutions.

Direct & Manual Fastening systems 96
Portfolio of professional tools designed with time saving and fixing reliability in mind.

Screws 142
Durable connection in wood.

Construction Bolts 160
Reliable and safe joint

Bonded anchors 178
Uncompromising technical parameters and safety guaranteed in all applications.

Mechanical anchors 208
Advanced technology for high load capacity and simplicity of use.

Lightweight fixings 234
Strength, versatility and simplicity of installation in all substrates and with any fixture.

Façade insulation fixings 256
Simplicity and speed of installation in innovative solutions for energy-saving buildings.

Roofing insulation fixings 282
System solutions ensuring efficient installation and long service life.

Foams and sealants 294
High efficiency and unparalleled universality in a wide range of products matching diverse applications.

RAWLPLUG OFFER

POWER TOOLS		
CORDLESS POWER TOOLS	RawHAMMER Rotary Hammer SDS-PLUS 18V	34
	RawWRENCH Impact Wrench 18V	35
	RawWRENCH Impact Driver 18V	36
	RawDRIVER Drill Driver 18V	37
	RawDRIVER Drywall Screwdriver 18V	38
RawGRINDER Angle Grinder 18V	39	
ACCESSORIES	R-PGL Protective gloves for power tools	40
	RawCASE The system's transport cases	41
	R-PGO Safety glasses for power tools	41



POWER TOOL ACCESSORIES

RT-MAXH Hollow drill bits Dustlessdrill SDS max	48
RT-MAXT Turbodrill SDS MAX	48
RT-MAXR Rebar drill SDS MAX	49
RT-MAXC Connector SDS max	50
RT-MAXA-PC Point chisels SDS max	51
RT-MAXA-FT Flat chisel SDS max	51
RT-MAXA-CH Channel chisel SDS max	51
RT-MAXA-BH Channel chisel SDS max	52
RT-MAXA-BUSHH Bush hammer SDS max	52
RT-SDSA Drill bits Aggressor SDS plus	53
RT-SDSB Drill bits Brickdrill SDS plus	56
RT-SDSG Granite drill bits SDS plus	57
RT-SDSR Drill bits Rebar drill SDS plus	58
RT-SDSF Drill bits Framedrill SDS plus	60
RT-HCB Hollow Core Bits SDS plus	61
RT-SDSH Hollow drill bits Dustlessdrill SDS plus	62
RT-SDSD Drill bits SDS plus with collar	62
RT-ADAP Expanders SDS plus Roof System	63
RT-TD Drill bits Roof System	63
RT-TDR Drill bits Roof System	64
RT-TDC Drill bits Roof System with collar	64
RT-SDSA-PC Point chisel SDS plus	65
RT-SDSA-FC Flat chisels SDS plus	65
RT-SDSA-CH Channel chisel SDS plus	65
RT-IMP Masonry drill bits Impactor	66
RT-HSSC HSS Cobalt drill bits	67
RT-HSSP HSS drill bits	68
RT-HSSL HSS long drill bits	70
RT-HSSD Double ended HSS drill bits	70
RT-AWD Auger bits	71
RT-FWD Formwork drill bits	72
RT-PDW Point drill bits	72

DRILL BITS AND CHISELS

Color coding



RAWLPLUG OFFER

POWER TOOL ACCESSORIES (cont.)

DRILL BITS AND CHISELS	RT-FLWD Flat drill bits	■	73
	RT-DKW Decking kit	■	74
BITS AND ADAPTERS	RT-HS-SET Hole Saws sets	■	74
	RT-IBIT Impact screwdriver bits	■	76
	RT-IBIT-ADAP Impact bit holder	■	76
	RT-BIT Screwdriver bits	■	77
	RT-BIT-SET1 Screwdriver bits set	■	78
	RT-BIT-ADAP Bit holders	■	78
	RT-BIT-PH2 Phillips/RT-BIT-TX25 T25 long screwdriver bits	■	80
	RT-TBIT Screwdriver bits	■	80
	RT-IS Impact sockets drive	■	81
DIAMOND DISC AND CUTTING WHEELS	RT-DDA, RT-DOB, RT-DDC, RT-DDE, RT-DDT, RT-DDW, RT-DDS Diamond discs	■	84
	RT-CDI, RT-GDI, RT-CDS, RT-GDS, RT-CDM, RT-CDM, RT-GDM, RT-FDI Cutting wheels	■ ■	86
CHUCKS	RT-KLESSCHUCK/13 Keyless chuck	■	89
	RT-CHUCK/13 Chuck with key	■	89
	RT-CHUCKSET/1 Set of chuck and adapter SDS plus	■	90
JIGSAW AND RECIPROCATING BLADES	RT-JSB Jigsaw blades for wood	■	92
	RT-JSB-M Jigsaw blades for steel	■	93
	RT-JSB Reciprocating saw blades for wood	■	94
	RT-JSB Reciprocating saw blades for steel	■	95
	RT-RSB-AB Reciprocating saw blades for cutting aerated concrete	■	95



DIRECT AND MANUAL FASTENING SYSTEMS

SC40 GAS SOLUTION FOR CONCRETE AND STEEL	R-RAWL-SC40 II Gas powered steel and concrete nailer	■ ■	101
	R-SC40-MH Magnet holder for SC40 gas nailer	■ ■	101
	R-KIT-WW90/SC40 Cleaning kit	■ ■	102
	R-SC40-PCR Pipe and cable plastic clip	■ ■	102
	R-SC40-PCO Pipe and cable plastic clip	■ ■	104
	R-SC40-PC Nylon clips double and single	■ ■	104
	R-SC40-CB Nylon cable bow double and single	■ ■	105
	R-SC40-TC Nylon clip for twin and earth cable	■ ■	105
	R-SC40-HEX Plastic universal cable/conduit tie holder	■ ■	106
	R-SC40-MC Metal clip double and single	■ ■	106
	R-SC40-MW-25 Metal washer	■ ■	107
	R-MTC-10M/R-MTP-10M Mounting tape - perforated	■ ■	107
	R-MTT-10M Textile mounting tape	■ ■	108
	R-RAWL-GP5 Fuel cell	■ ■	108
	R-KNC, R-KSC plastic collated concrete pins with fuel cells	■ ■	109

Color coding
 solid walls ■ plasterboard ■ universal ■ timber ■ metal ■

RAWLPLUG OFFER

DIRECT AND MANUAL FASTENING SYSTEMS

WW90 GAS SOLUTION FOR WOOD	R-WW90II Gas powered framing nailer	■	111
	R-RAWL-GMC38 Gas powered joist hanger nailer	■	112
	R-RAWL-A2064 Gas powered second fix nailer	■	112
	R-RAWL-B1664 Gas powered second fix nailer	■	113
	R-RAWL-GP6 Fuel Cell for use in R-WW90II	■	115
	R-RAWL-GP4/SP-RAWL-GP1 Fuel Cell	■	115
	R-DRG/R-DRK Ring paper collated nails with fuel cells	■	116
	R-DPG/R-DPK Smooth paper collated nails with fuel cells	■	117
	R-HDGT-3838 Paper collated joist hanger nails	■	118
	BRADS/ANGLED Brad nails	■	118
PNEUMATIC ACTUATED TOOLS	R-RAWL-PN-3490 Pneumatic framing nailer	■	121
	R-RAWL-PNP-130 Pneumatic framing nailer	■	121
	R-RAWL-PMC-38 Pneumatic joist hanger nailer	■	122
	R-RAWL-PN Pneumatic coil nailer	■	122
	R-RAWL-PRN-45 Pneumatic roofing nailer	■	123
	SPG-DPG Paper collated nails without fuel cells	■	123
	R-GPG Plastic collated nails	■	124
	R-GDP Wire collated nails	■	125
	R-RAWL-C100-P Oil lubricated compressor	■	125
	R-RAWL-C20-PRO Oil lubricated compressor	■	126
	R-RAWL-C50 Oil lubricated compressor	■	126
	R-RAWL-C50-10 Oil lubricated compressor	■	127
	R-COMP-HOSEREEL Hose reel	■	127
	RT-KGR0011 Hammer Tacker 6-10 mm	■	129
	RT-KGR0013 Hammer Tacker – Roofing pro 6-14 mm	■	129
RT-KGR0014 Hand stapler – Trade, 6-10 mm	■	130	
RT-KGR0024 Hand stapler – Universal Trade 3 in 1, 6-14 mm	■	130	
RT-KGR0029 Hand stapler – Powerful easy shot 3 in 1, 6-14 mm	■	131	
RT-KGR0031 Hand stapler – 3 in 1, 6-14 mm	■	131	
RT-KGR0032 Hand stapler – Household, 6-14 mm	■	132	
RT-KGR0034 Hand stapler – Compact 3 in 1, 6-14 mm	■	132	
RT-KGR0053 Hand stapler – Easy squeeze, 6-10 mm	■	133	
RT-KGR00153 Hand stapler – Handy, 6-10 mm	■	133	
RT-KGR0162 Hand stapler, 6in1 heavy duty	■	133	
RT-KSS Staples	■	134	
GLUING SYSTEM	RT-GG-180 Professional glue gun 180W	■	137
	RT-GG-080 Universal glue gun 80W	■	137
	RT-GG-055 Glue gun 55W	■	138
	RT-GS Glue	■	138



RAWLPLUG OFFER

SCREWS

WOOD	R-PTX construction screw with countersunk head and partial thread	■	147
	R-PTK construction screw with wafer head and partial thread	■	148
	R-PVS construction screw with countersunk head and full thread	■	149
	R-PVZ construction screw with cylinder head and full thread	■	150
	R-PCZ construction screw with cylinder head and double thread	■	151
	R-DSX Decking Screws	■	152
R-DSX-A2 Stainless steel decking screws	■	153	
DRY-WALL	R-FTC Drywall collated screws for wood	■	155
	R-FSC Drywall collated screws for metal	■	155
CURTAIN WALLS	R-OCR self-drilling screws for composite panels, max 6mm	■	157
	R-ONR self-drilling screws for composite panels, max 12mm	■	157
	R-ORR self-drilling Screws for composite panels, max 18mm	■	158
	R-OTR self-drilling screws for composite panels to concrete and timber	■	159



CONSTRUCTION BOLTS

HV High-strength structural bolting assemblies for preloading	■	163
SB Non-preloaded structural bolting assemblies	■	170



BONDED ANCHORS

RESIN	R-KEX II Pure Epoxy Resin	■	187
	R-KER-II / R-CFS+KER-II Hybrid resin	■	188
	R-KER / R-CFS+RV200 Vinylester resin	■	189
	R-KEM II Styrene free polyester resin	■	191
	R-KF2 Polyester resin	■	192
CAPSULE	R-CAS-V Spin-In capsule with threaded rods	■	193
	R-HAC-V Hammer-In capsule	■	193
ACCESOIRES	R-STUDS Metric threaded rods		194
	R-ITS Internally threaded sockets		197
	R-BRUSH Manual and automatic Wire Brushes		198
	R-BLOWPUMP blow pump		199
	R-PLS / SP-CE Mesh Sleeves		199
	R-NOZ Mixer nozzles		200
	Nozzle extension		200
	R-NOZ-P Dosing piston plug		201
	R-NOZ-ADAPTER Air adapter		201
	R-GUN Dispenser guns		202

Color coding
 solid walls ■ plasterboard ■ universal ■ timber ■ metal ■

RAWLPLUG OFFER

MECHANICAL ANCHORS

THROUGH BOLTS	R-LX Concrete Screw Anchor	■	215
	R-HPTIIA4 Stainless steel throughbolt	■	218
	R-HPTIIZF Zinc flake throughbolt	■	219
	R-XPTIIA4 Stainless steel throughbolt	■	221
	R-XPT-HD Hot Dip Galvanized Throughbolt	■	222
R-XPT Throughbolt	■	223	
RAWLBOLTS	R-RBL Rawlbolt - loose bolt	■	225
	R-RBP Rawlbolt - bolt projecting	■	226
	R-RBL-E Rawlbolt - eye bolt	■	226
	R-RBL-H Rawlbolt - hook bolt	■	226
	R-RB Rawlbolt shield	■	227
SAFETY PLUS	R-SPLII Safety Plus II	■	228
	R-SPL Safety Plus	■	229
DROP-IN ANCHORS	R-DCA-A4 Drop in anchor	■	230
	R-DCA / R-DCL Lipped drop in anchor	■	231
	R-DCA-ST-II Drop In Anchor Setting Tools	■	232
ACCESSORIES	R-S-LX TEST Concrete screw re-usability testing gauge		232
	R-TESTER Rawlplug Tension Tester Kit		233



LIGHTWEIGHT FIXINGS

FRAME FIXING	R-FF1 Nylon Frame Fixings long expansion zone	■	239
	R-FFS Nylon Frame Fixings short expansion zone	■	242
	R-FF1-CAP Masking cap for R-FF1 frame fixings	■	244
MULTIPURPOSE PLUGS	UNO® Universal plug and Universal plug with screw	■	245
	4ALL Universal nylon plug	■	246
	4ALL Universal nylon plug with screw	■	247
	R-RNT RAWLNUT Flexi Plug	■	247
R-GS Ceiling wedge anchor	■	248	
HAMMER FIXINGS	R-FX-N-C Nylon hammer-in fixing with cylinder head	■	249
	R-FX-N-K Nylon hammer-in fixing with mushroom head	■	249
	R-FX-N-L Nylon hammer-in fixing with countersunk head	■	250
PLASTERBOARD FIXINGS	R-DRA Nylon self drill fixing for plasterboard	■	251
	R-DRAM Metal self drill fixing for plasterboard	■	251
	R-SM Intersect Hollow wall anchor	■	252
	R-AT Tool for setting SM Intersect	■	252
	R-SPO Spring toggle	■	253
	TAP-IT Hammer-in fixing for plasterboard	■	253
FRAME FIXINGS	R-O Metal frame anchor	■	254
	R-WHO Frame screws	■	254
	R-KMW Metal hammer fixing	■	255
R-ISOPLUG Insulation fixing		255	



RAWLPLUG OFFER

FAÇADE INSULATION FIXINGS

SCREW-IN HAMMER-IN	R-TFIX-8S Screw-in universal façade fixings	■	263
	R-TFIX-8SX Screw-in universal façade fixings	■	264
	TFIX-8ST Screw-in universal façade fixing	■	265
	R-TFIX-8M Hammer-in façade fixing with metal nail	■	266
ME- TAL	MBA/MBA-SS Façade fixing	■	270
	R-KFS-90/20 Counterbore cutter		271
WASHERS	MKC/MKC-SS Washers		271
	KCX Tubed insulation washer		272
	R-KC Insulation Washers		272
	R-DB Ceiling screw-in solution with washer		273
	R-KWL Insulation retaining plate		274
	R-KWX Insulation retaining plate with perforator		275
	R-TFIX-CAP-CUTTER Mechanical cutter for EPS and Mineral Wool		276
	R-KFS Counterbore cutter		276
ACCESSORIES	R-TFIX-TOOL-CS Setting tool		277
	R-TFIX-TOOL		277
	R-TFIX-CAP Insulation caps		279
	ISO-PLUG Insulation fixings		280
	FTF Fir Tree Fixing		281
	R-HR Scaffolding eyebolt		281



ROOFING INSULATION FIXINGS

GOK	R-GOK Telescopic sleeve with round plate	■	287
	R-WBT Screw for concrete	■	288
	R-WCS Screw for concrete	■	288
	R-WX-T Self-drilling screws for steel	■	289
	R-WO-T Screws for steel	■	290
SCREWS	R-WW-T Screws for timber	■	290
	R-POK Steel washers		291
	R-POW-05, R-POW-07 Oval steel washers		291
WASHERS	K08L Expansion plug		292
	ADAPTER-MAG For steel washers		292



Color coding
 solid walls ■ plasterboard ■ universal ■ timber ■ metal ■

RAWLPLUG OFFER

FOAMS, SEALANTS & ADHESIVES


FOAMS	R-RPS Hand Held Expanding Foam	■	299
	R-RPS-PVC Hand Held Foam - Low Expansion	■	299
	R-RPS-500 Hand Held Polyurethane Foam	■	300
	R-RPP-45 GUN PU Foam	■	300
	R-RPP-65 Super Efficient GUN PU Foam	■	301
	R-RPP-PVC Low Expansion Gun PU Foam	■	301
	RPP-B1 Fire Resistant Gun PU Foam	■	302
	R-RPP-FIX	■	302
	RPP-FIX-60S Express polyurethane adhesive	■	303
	R-RPP-MORTAR	■	303
ADHESIVES	R-RPP-ROOF Roofing adhesive	■	304
	R-RPC-0500 Agent for removing uncured polyurethane foams	■	304
	RPP-GUN-NC Professional gun for expanding foams	■	304
	R-DEZI Disinfectant spray	■	306
	R-SL-BUD Construction Silicone	■	310
	R-SL-SAN Sanitary silicone	■	310
	R-SL-NEU Neutral Silicone	■	311
	R-SL-UNI Universal Silicone	■	311
	R-SL-SKL Glass Silicone	■	312
	R-SL-TK High Temperature Silicone	■	312
	R-SL-LUS Mirrors Adhesive Silicone	■	313
	R-SL-DEK Roof Rubber Silicone	■	313
	R-SL-DEK-SPEC Specialized Roof Sealant	■	314
	R-SL-MA Acrylic	■	314
	R-SL-MA-FAST Light Fast Acrylic	■	315
	R-SL-MAG Acrylic for Drywall	■	315
	R-XPC-300 Express Cement	■	316
	R-SL-FIX-HYBR Hybrid Sealant Adhesive	■	316
R-SL-FIX-SBS Mounting Adhesive SBS	■	317	



POS OFFER

POS TYPE OF PACKAGING	Combo pack		320
	Rawbag		326
	B-pack packaging		341
	B-pack & Rawbag solutions kits		344
	Jar packaging		349
	Packaging for loose products		352
POS OFFER AND COLOR CODING	Universal materials	■	358
	Plasterboard	■	361
	Solid walls	■	363
	Timber	■	368
	MIX of substrates	■ ■ ■	372
Promopack	■	373	

SYMBOLS

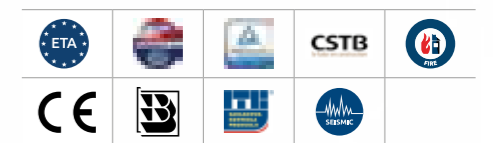

1. All rights to the catalogue and the contents of the catalogue are reserved. Preservation, distribution or reproduction without the consent of Koelner Rawlplug IP sp.z o.o. is prohibited.
 2. All copyrights to the packaging, layout of graphic, elements of packaging, trade names and other content of the packaging of the products depicted in the catalogue are reserved. Preservation, distribution or reproduction without the consent of Koelner Rawlplug IP sp.z o.o. is prohibited.
 3. All products and services as well as packaging of the products depicted in the catalogue are marked and sold in connection with RAWLPLUG® and RAWL® trademarks.
 4. All references in catalogue to construction sites, buildings, investments, constructions, products or services („objects“) of any third party are solely for information purposes and Koelner Rawlplug IP sp.z o.o. nor any other company from Rawlplug Group reserve or claim any rights to these objects or any rights connected therewith, in particular their names and/or trademarks.



Rawlplug® Offer

Rawlplug® has been operating as an expert in fixings, fasteners and tools for over 100 years.

Although the most important, our products designed for professionals are not the only pillar of our comprehensive offering. They are complemented by specialised services and an innovative training programme. They have all been created to provide our customers, namely engineers, architects, construction workers, contractors or salespeople, with access to a full portfolio of capabilities, know-how and best practices aimed to support them in the everyday pursuit of various tasks and business goals. And we can actually vouch for that, because we know our customers and respect their work. We are in touch with them on a daily basis, watching and listening to them carefully. We wish to share with them our knowledge and experience, allowing them to meet even the most ambitious challenges.



Products

The Rawlplug® offering spans as many as **10 specialised categories of products** manufactured in some of the most advanced production plants in Europe. Rawlplug is the only brand that can actually cater for the needs of all segments of the construction industry. Every product is provided between several dozen variants matching specific requirements of different substrates, applications and installation conditions. Each one comes with dedicated accessories, altogether forming a complete system.




Services

Our extensive portfolio of services dedicated for engineers, designers and constructors stems from our comprehensive approach to the designing of fixings. What is interesting about our range of tools tailored to the needs of all these professionals as well as the extensive technical assistance is that, on the one hand, they provide the consumers of the Rawlplug® services with high comfort of working under conditions which affect their efficiency and enable them to save time, and on the other hand, ensure safety which they find so important at work.



Training

The brand's training offer is delivered under the **Rawlplug Academy®** project, being a truly innovative development programme based on the foundation of comprehensive development of knowledge and skills of our customers. The integration of Rawlplug Academy's four pillars, i.e. the e-learning platform, the Training Centre in London, the mobile education and development centre known as the RawlTruck, as well as traditional workshops and the knowledge base, makes it the most comprehensive and useful educational scheme in the sector of fixings and fasteners.

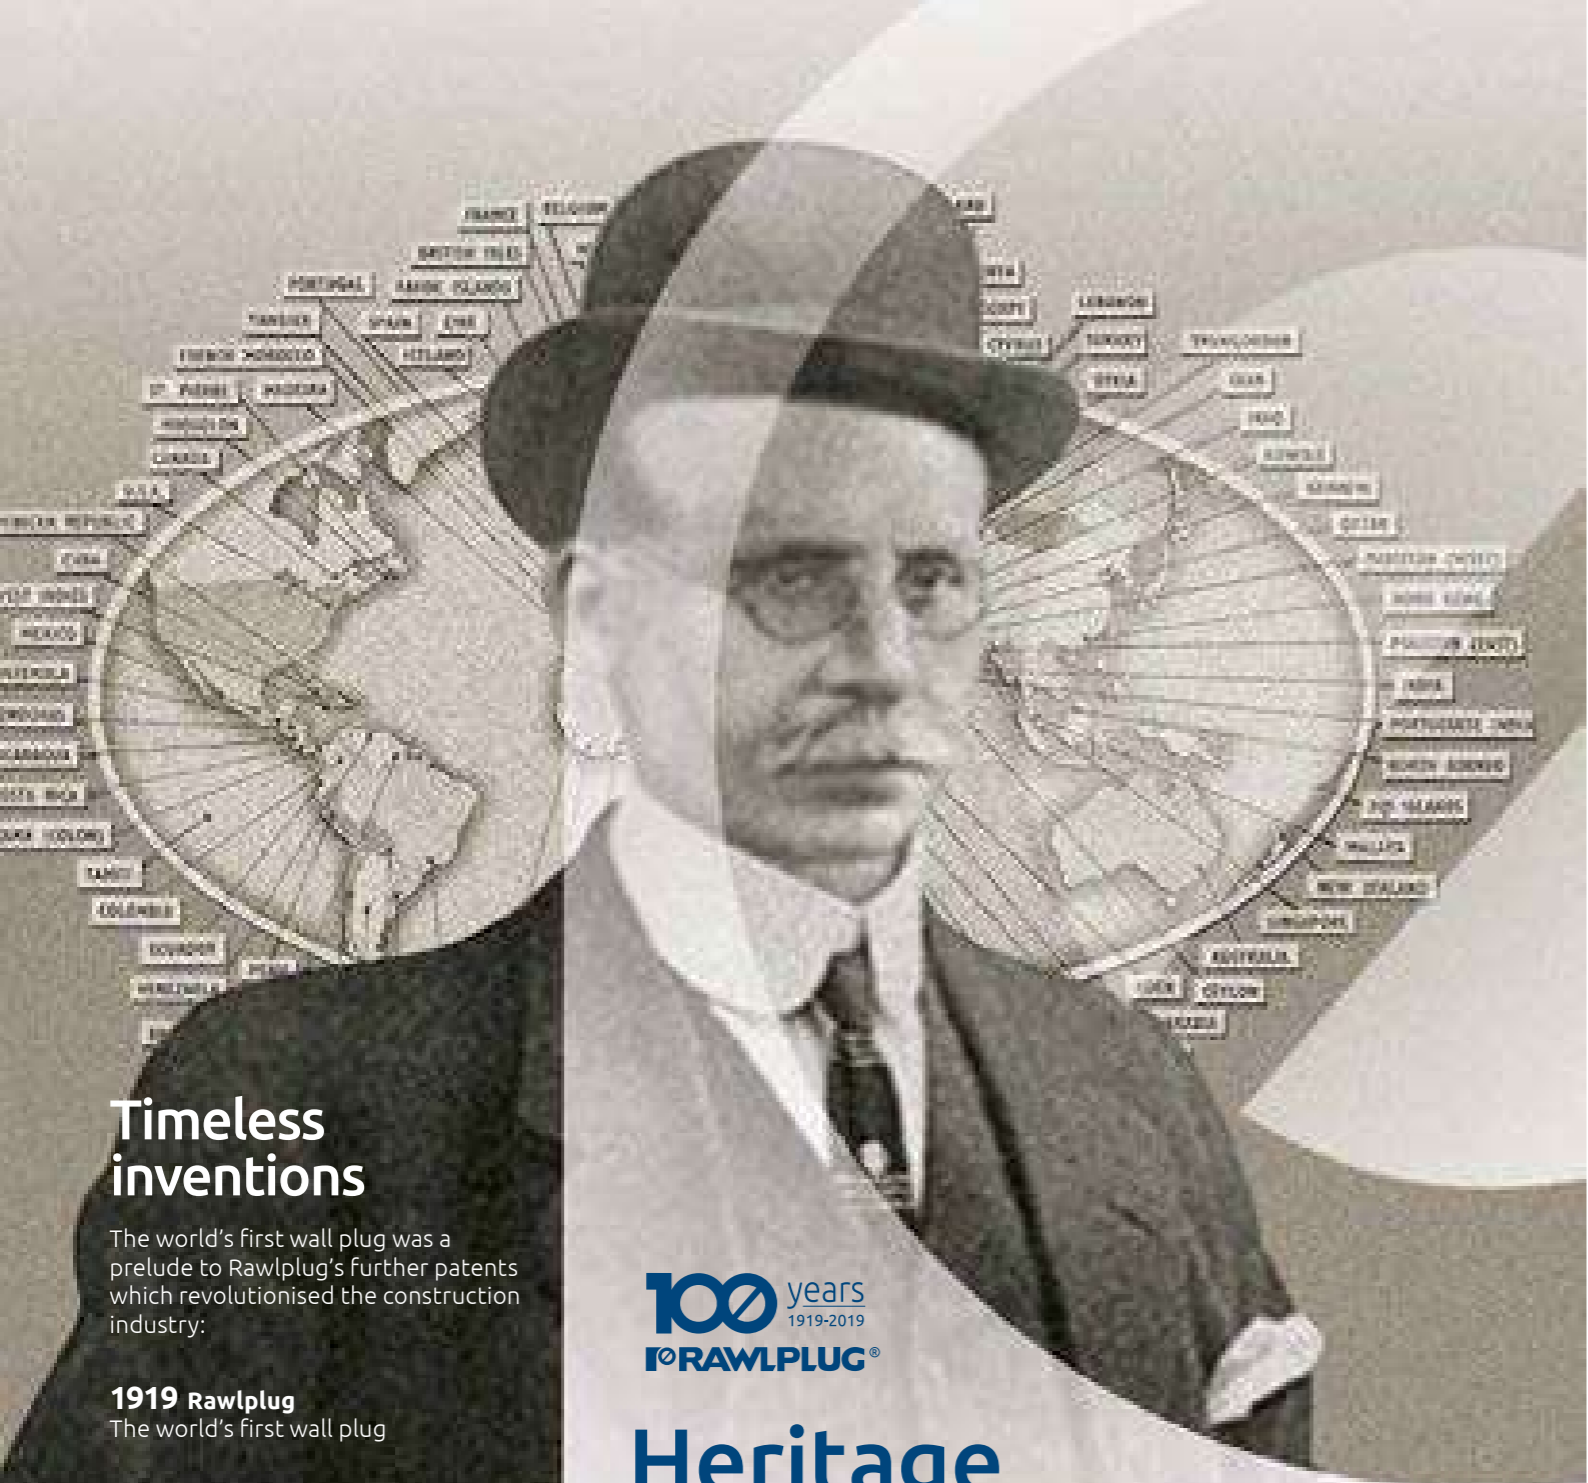

Timeless inventions

The world's first wall plug was a prelude to Rawlplug's further patents which revolutionised the construction industry:

1919 Rawlplug
The world's first wall plug

1926 Rawlhammer
The world's first patented hammer drill

1934 Rawlbolt
The world's first mechanical anchor

1941 Rawlnut
The world's first shock- and corrosion-resistant fixing
Spring Toggle
The world's first fixing solution dedicated to drywall applications

1948 Rawlanchor
Drywall fixing solution which revolutionised the market

100 years
1919-2019
RAWLPLUG®

Heritage

John Joseph Rawlings

– entrepreneur, visionary, inventor.

The world's first wall plug he had patented, triggered a true revolution in the construction industry and went down in history for good. At the same time, this invention marked the beginning of a completely new history – a history of the brand whose contemporary strength draws abundantly from the legacy of the past, the achievements of the present and the vision of the future. – A brand which not only astonished the general public over decades with innovative solutions and products dedicated to professionals, but also with its panache and scale of operations, extraordinary ideas that revolutionised the marketing of its era, and its comprehensive approach to customers' needs and expectations, in which it has never ceased to be a role model. We are deeply convinced that the true Renaissance man of the construction sector, whom John Joseph Rawlings definitely was, would be proud of us. He would surely commend us on building the brand's strength on the grounds which combine the past heritage, the achievements of the present and the vision of the future.

Revolution in marketing

It's truly extraordinary that whatever the effort undertaken by the Rawlplug brand, it stepped far beyond the standards of their day and age. Take the publicity campaign following their breakthrough invention of the world's first wall plug. It was then that the brand spent thousands of pounds for press advertising, only to change the potential users' mindset vis-à-vis the actual fixing capabilities of their times. Acting with impressive panache and on a massive scale, the brand made a commercial sensation, all the more since never before had any construction company been advertised on Daily Mail's front page!

Travelling Rawlplug

What proved unquestionably supportive of the brand's global expansion was the mobile display installation known as Rawlplug Travelling Showroom. It marked yet another revolution in marketing. These vehicles took long trips lasting several months on all continents, from Sweden to Australia, and made a sensation in each market where they appeared. Never before had the potential customers encountered such a direct form of commodity promotion combined with the opportunity to use the products in practice. In a tailored van, customers could become familiar with the full portfolio of fixings as well as product datasheets, use individual items on site, therefore learning about their applications and installation methods, as well as speak to the brand's experts, hoping for some individual consultations.

Service that begins on drawing boards

Rawlplug has always understood and recognised the role and importance of architects, designers and engineers. Already in the 1940s, free-of-charge technical advisory and support service were promoted by the industry's press as a means to solve any kinds of fixing related issues. "A service that begins on a drawing board." Isn't it stunning that such a comprehensive approach to customer service is one of the foundations of our legacy? Heritage which allows us to respond to the needs of the present while curiously awaiting the future.

Conquest of the world

The initial 20 years of Rawlplug's operations were marked with global expansion. To be present in "every civilised country in the world" was John Joseph Rawlings's vision which he consistently pursued over the successive years. At the turn of the 1940s, the brand was present on all continents, completing the conquest of the United States and aiming at Australia. By that time, Rawlplug's products had already been manufactured in 10 countries, including London, New York, Paris or Zurich.





Onsite Technical Support

Technical Helpdesk

Technical Library

Product Selector

EasyFix

BIM

Services

We have genuine experts on board – specialists who cooperate on a daily basis to keep track of the actual needs of construction professionals.

They continuously seek to improve the Rawlplug® service package, focusing on technical and design support for architects, constructors and contractors. They track even the most specific and ambitious expectations of customers, and successfully integrate them with our solutions. Rawlplug® has been investing in the development and improvement of tools intended to make your daily work easier and to enhance its comfort, efficiency and quality. And we haven't stopped there, since all our services are rendered at no extra charge.



Technical Helpdesk

Consultations and technical/design support provided by the Technical Department's engineers, practitioners and market experts.

- Technical and design-related consultations with our Technical Department's engineers.
- Systematic and structured handling of problem-solving tasks, thanks to forms dedicated to specific applications and products.
- Personalised design assistance with the specificity and requirements of individual solutions in mind.

HOW TO SUBMIT ENQUIRIES?

Enquiries are submitted via Rawlplug's website. You simply need to pick the right form, enter your data and information about your project, and submit the enquiry form. Our employees contact the website using the RTH tab of our corporate portal. The new format is user-friendly, and it provides our engineers with enhanced tools, since now they have access to all enquiries at one place.

EasyFix

Design calculations required to plan fixings for diverse construction elements using Rawlplug® branded products..

- Proprietary and free-of-charge application for design calculations, responding to even the most specific requirements of construction investments.
- Divided into subject-specific modules dedicated to individual segments of construction works.
- Based on the latest EAD, ETAG and EUROCODE guidelines, ensuring that calculations conform to the standards, that they are precise and highly useful.
- Highly specialised features combined with simplicity and intuitiveness of use to support every designer and ensure safety of the solutions being designed.

ACCESS TO EASYFIX

The EasyFix application is free to download and use. You can get the software from www.easyfix.rawlplug.com/en



BIM

Automatic implementation of models and technical drawings of the Rawlplug® fixings in the BIM/CAD design environment.

- Proprietary application enabling models and technical drawings of the Rawlplug® fixings to be downloaded and embedded in designs.
- Comprehensive sets of product data making design-related decisions easier.
- Models and drawings available in 2D and 3D, in 6 projections and the 360° view mode.
- Available on-line or ready to download and implement in the BIM/CAD environment.

ACCESS TO SOFTWARE

There are two ways to use the data contained in BIM Rawlplug:

Integration of BIM Rawlplug with Autodesk® Revit®

Integration of the data library with Autodesk® Revit® is possible thanks to the innovative Revit plug-in. You just need to download the plug-in from the rawlplug.com website. It is available in the Services/Design & Software tab.

Using on-line software


BIM Rawlplug is an application that can be downloaded from the Services/Design & Software tab on rawlplug.com. It may be used by anyone who intends to browse through and become familiar with the models, drawings and information the system provides, without being forced to register and subsequently log on.

Onsite Technical Support


Technical advisory provided by local engineering teams to tackle all technical challenges, particularly with regards to on-site strength testing of the Rawlplug® products under real-life operating conditions.

- Technical support offered by our engineers on a local basis, on the given construction investment's location.
- Site testing of the Rawlplug® products under real-life operating conditions.
- Signature standard based on EAD, BS:8539 and the relevant recommendations of the British Construction Fixings Association.
- Repeated testing to confirm reliability of original test results.
- Detailed reports taking all technical parameters and our experts' individual recommendations into consideration.

Technical enquiries?

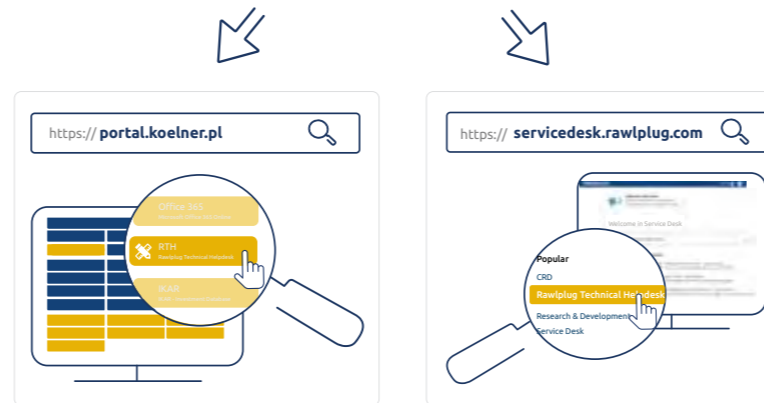

Choose subject:

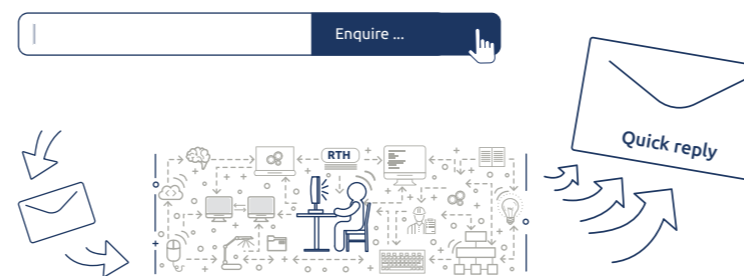

Check its advantages

	RTH	E-MAIL
Quick reply	✓	✗
Entire conversation history at one place	✓	✗
Easy-to-check project history, even after several years	✓	✗

* You can also contact us via <https://onerawlplug.com>



ProductSelector


Appropriate selection of products to match specific applications by taking the project's requirements and particular requirements into account.

- Possibility to choose products from among 10 product categories in a selection-assisted process.
- Numerous convenient product browsing options relevant from the intended use perspective.
- Transparent and highly functional presentation of useful information.
- Option to enquire about product availability or specific properties.

TechnicalLibrary

Complete portfolio of technical documentation required to place the products on the market as well as to select and use them in the right manner.

- Option to pick from among 15 categories of information and documents required to make the right choice of the brand's products and to use them correctly.
- Complete set of product-specific technical and commercial documents.
- Original documents as well as documentation required for legal purposes, enabling distribution, designing and use of fixing solutions.

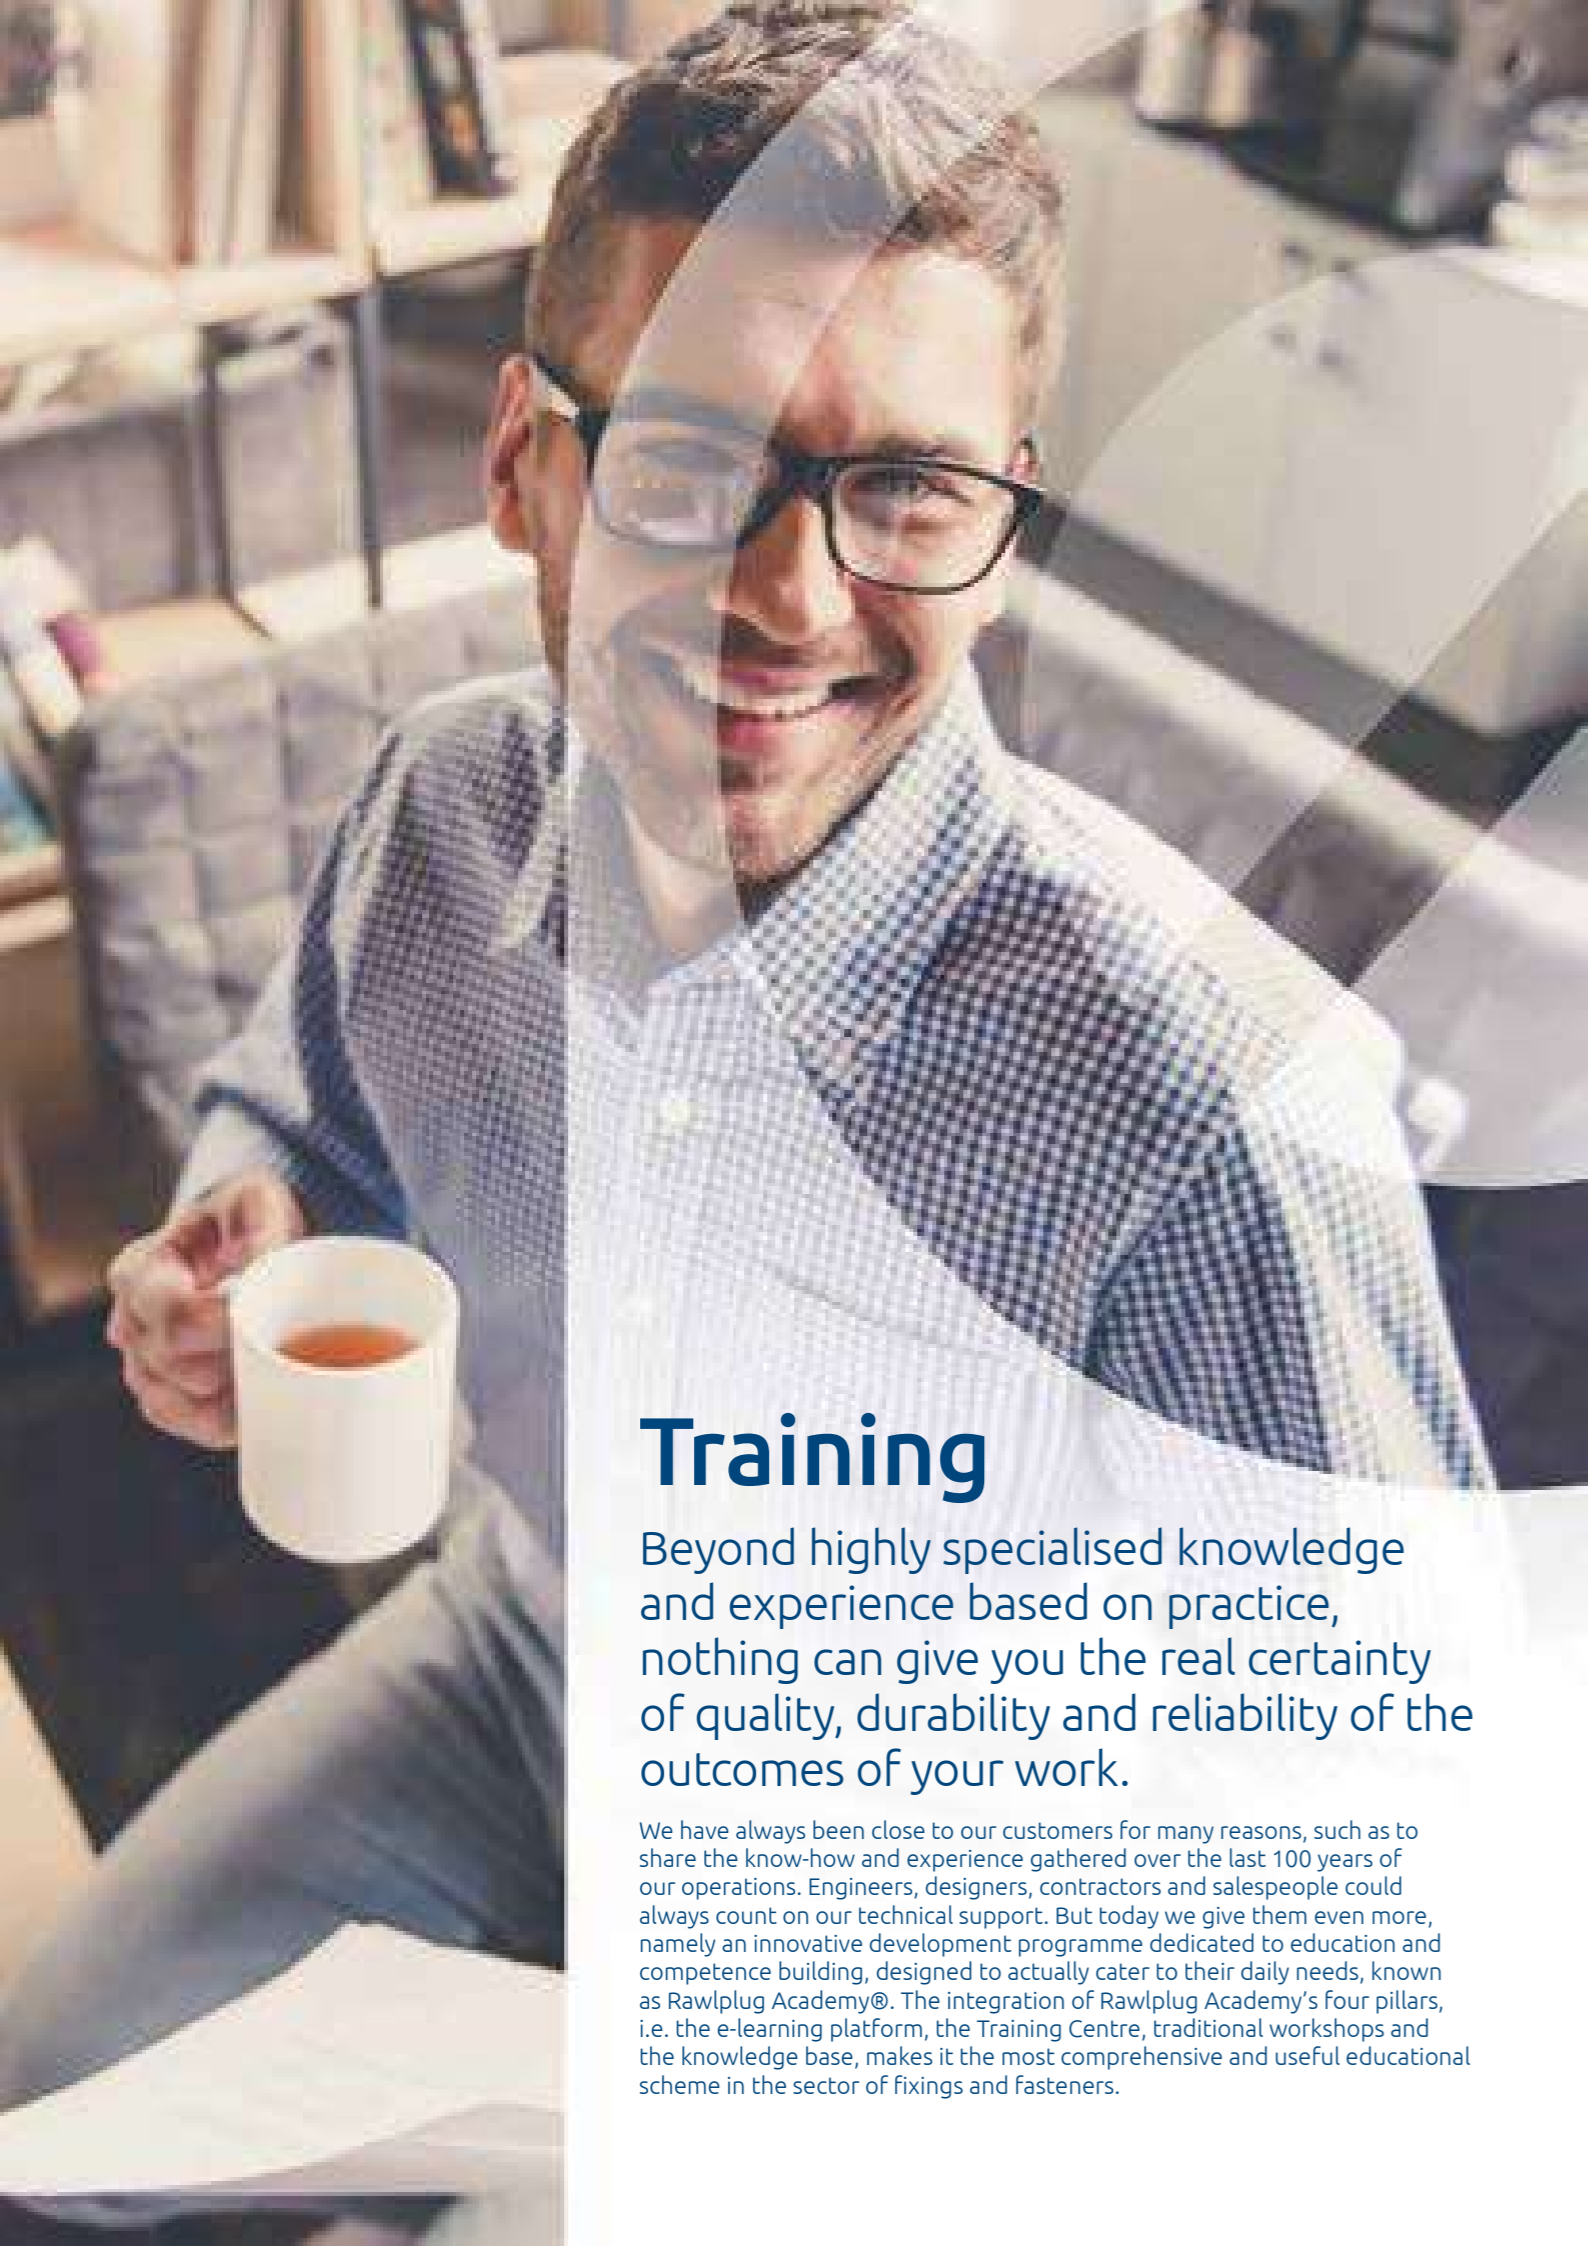

Training


Beyond highly specialised knowledge and experience based on practice, nothing can give you the real certainty of quality, durability and reliability of the outcomes of your work.

We have always been close to our customers for many reasons, such as to share the know-how and experience gathered over the last 100 years of our operations. Engineers, designers, contractors and salespeople could always count on our technical support. But today we give them even more, namely an innovative development programme dedicated to education and competence building, designed to actually cater to their daily needs, known as Rawlplug Academy®. The integration of Rawlplug Academy's four pillars, i.e. the e-learning platform, the Training Centre, traditional workshops and the knowledge base, makes it the most comprehensive and useful educational scheme in the sector of fixings and fasteners.



E-LEARNING platform

- Integrated training scheme covering industry-specific knowledge as well as Rawlplug's products and services that every professional will find indispensable, supporting them in tackling even the most ambitious challenges.
- Building development paths based on individual needs, the knowledge and skills already acquired as well as professional specialisation of the participants.
- Access to on-line training via a highly functional platform enabling you to join the training at any place and time.
- Development programmes dedicated to various groups of professionals: engineers, contractors, designers and representatives of the Trade & DIY sector.

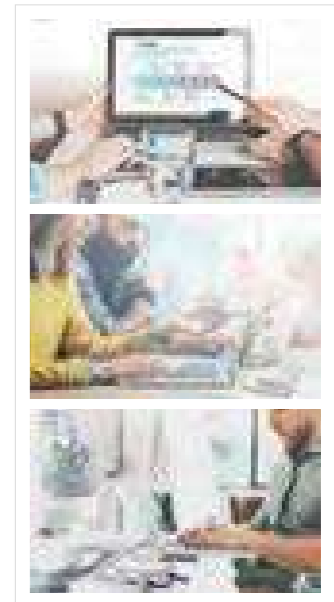

Rawlplug Webinars® #becomexpert

SPECIAL OFFER FOR RAWLPLUG'S CUSTOMERS

- We would like to invite you to become a participant in Rawlplug's new training project, which meets 3 basic criteria of effective learning: practical KNOWLEDGE, interesting CONTENT, attractive FORM. Now all these are available for you when you are in your office or while you work from home or rest in your garden.





Classroom training

- Workshops devised in a way to consolidate and extend the knowledge acquired at e-learning courses.
- Meetings in small groups enabling the participants to talk about their typical and potential design and contracting challenges.
- Exchange of the most valuable experiences with market practitioners and experts responsible for shaping Rawlplug's product and service portfolio.
- Training modules designed and delivered by specialists with extensive experience in collaboration with designers, contractors and salespeople, responsible for developing individual product groups.



Training centre

- Modern training facility where you can experience and get to know Rawlplug's entire offering, comprising products, services and training.
- Possibility to select and use a full range of our products under conditions that closely reflect their real-life on-site application.
- Unique opportunity to get to know latest trend-setting Rawlplug® releases that go beyond even the most highly specific expectations of our customers.
- Learn more on www.rawlplug.com/en/rawlplug-academy

Training Center Rawlplug Academy®
Products Zone



Training Center Rawlplug Academy®
Services Zone




Training Center Rawlplug Academy®
Testing Zone





Knowledge base

- Access to original materials prepared by recognised market experts relying on extensive experience, know-how and best practices.
- Materials that come in handy for every professional from the industry, regardless of their specialisation level.
- Attractiveness and utility value guaranteed by diversified forms of information presentation – both traditional and on-line.
- Tools intended for application in practice, in a broad range of design and construction works, and useful for those who wish to build their expert's position in the market during public appearances, training courses or trade meetings.

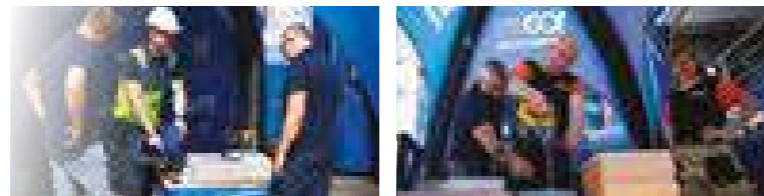



Products

No other brand in the world manufactures and delivers to its customers products that cater to virtually every segment of the construction industry. Our offering consists of as many as 10 specialised product categories.

We control every step in the manufacturing process, starting from designing performed by engineers collaborating with constructors, through prototyping and testing handled by the R&D Department, to production conducted in manufacturing plants which, in terms of technology, are surely among the most highly advanced and best automated factories in the world.

For 100 years now, it has allowed us to deliver products that are universal, on the one hand, and on the other hand, which meet requirements of even the most highly specialised construction works, offer modern design and unique technical parameters, being easy to install and extremely durable in operation.

Tools

Power tools

Range of cordless power tools with li-on technology.

Power tool accessories

Comprehensive and complementary portfolio of accessories for top-quality fixing solutions.

Fasteners

Direct Manual & Fastening systems

Portfolio of professional tools designed with time saving and fixing reliability in mind.

Screws

Durable connection in wood.

Fixings

Bonded anchors

Uncompromising technical parameters and safety guaranteed in all applications.

Mechanical anchors

Advanced technology for high load capacity and simplicity of use.

Lightweight fixings

Strength, versatility and simplicity of installation in all substrates and with any fixture.

Façade insulation fixings

Simplicity and speed of installation in innovative solutions for energy-saving buildings.

Roofing insulation fixings

System solutions ensuring efficient installation and long service life.

Foams and sealants

High efficiency and unparalleled universality in a wide range of products matching diverse applications.





” Power Tools

Overview of cordless power tools	30
RawlHAMMER R-PRH18 Rotary hammer 18V	34
RawlWRENCH R-PIW18 Impact wrench 18V	35
RawlWRENCH R-PID18 Impact driver 18V	36
RawlDRIVER R-PDD18 Drill driver 18V	37
RawlDRIVER R-PDS18 Drywall screwdriver 18V	38
RawlGRINDER R-PAG18 Angle grinder 18V	39

RAWLPLUG®

100 YEARS OF EXPERTISE IN FIXINGS, FASTENERS AND TOOLS

WITH LI-ION TECHNOLOGY

RANGE OF CORDLESS POWER TOOLS

- Strong and efficient lithium-ion Rawlplug 18V batteries.
- Our large battery capacity enables long-term operation without unnecessary downtime.
- Lithium-ion technology allows you to fast charge the battery.
- Rawlplug's 18v battery is used to power all power tools in the range.
- High-quality lithium-ion cells provide long-term and effective battery operation.
- The charge level indicator allows you to properly plan your working time.



RawlHAMMER
 ROTARY HAMMER SDS-PLUS 18V
 R-PRH18



RawlWRENCH
 IMPACT WRENCH 18V
 R-PIW18



RawlWRENCH
 IMPACT DRIVER 18V
 R-PID18



RawlDRIVER
 DRILL DRIVER 18V
 R-PDD18

RawlDRIVER
 DRYWALL SCREWDRIVER 18V
 R-PDS18



RawlGRINDER
 ANGLE GRINDER 18V
 R-PAG18



RawlCHARGER

Fast charger 18V 6,5A
 R-CHR-186501



RawlBATTERY

Li-Ion battery 18V 5,0AH
 R-BAT-185001



RawlBATTERY

Li-Ion battery 18V 2,0AH
 R-BAT-182001



RawlCHARGER

Charger 18V 1,5A
 R-CHR-181501

POWER TOOLS OFFER

PRODUCTS - SERVICES - RAWLPLUG ACADEMY

Products

Knowing our customers' individual needs, we have created an offer which allows for the products to be freely arranged in sets. It is based on different versions of the same product and enables every customer to decide which version suits their needs best.



Version XL2

Invariably complete, the most convenient version consists of **the power tool, two batteries, a charger and a transport RawlCase**



Version S

Dedicated to those who already own batteries and a charger from Rawlplug, it comprises **the bare tool in the RawlCase**



Version XS

A solution designed for those who don't need the transport case. It contains the power tool in **the cardboard bare from Rawlplug**



Since we attach the highest importance to the **comfort and safety of use** of our products, the range of our power tools has been extended with dedicated safety gloves made of top-quality synthetic leather, featuring a special shock absorbing layer, and safety goggles with a removable silicone dust shield.



In order to make the **handling** of our products even more **ergonomic**, all our machines are packed in the RawlCase transport cases. They form a system, and can freely combined with other cases – also those of different sizes. An additional trolley compatible with the RawlCase makes it even easier to handle the products at the construction site.



All **power tool accessories** from Rawlplug form an integrated solution designed to match the power tools.



Services

Since one of the foundations of Rawlplug's portfolio of power tools is highly efficient service, our experienced team of technical support specialists is always at the disposal of our customers. **Rawlplug's service and maintenance** support is developed in every country where Rawlplug has deployed its distribution network, and where the customers are offered both warranty and post-warranty services. Detailed terms and conditions of servicing are available at: www.service.rawlplug.com

Rawlplug Academy

Our signature education and development programme is a guarantee of adequately consolidated knowledge about our products and services, but it also helps in building the expert image, extending one's competences and gaining trust among the most demanding customers.

Our training scheme is comprehensively tailored to the customers' needs, which is why it comprises **conventional training, webinars, e-learning, on-site presentations, and point-of-sale presentations.**



Now you can sign up for any chosen format of our training by registering at rawlplug.com/en/rawlplug-academy

RawHAMMER R-PRH18-XL2 ROTARY HAMMER SDS-PLUS 18V

NEW

➤ **Electronic protection** stop system engages during jamming to protect the user and the power tool

➤ **4 functions** - drilling / hammer drilling / chiseling / positioning the chisel makes the rotary hammer an extremely versatile power tool

➤ **The SDS-Plus tool shank** ensures full compatibility with a wide range of accessories available on the market and enables effective transfer of impact energy

➤ **Rubberised, profiled handle** increases grip and user ergonomics

➤ **Ergonomic mode selector** allows convenient and quick switching between power tool functions

➤ **Powerful brushless motor** ensures high efficiency of the mechanism and increases the life time of the tool

➤ **Compact design and lightweight construction** reduces fatigue during long-term use

➤ **LED illuminates** the workplace to increase user's comfort and safety

➤ **Two Li-Ion batteries** with 5.0 Ah capacity and a 50 minute fast charger are included with the set to guarantee uninterrupted work

➤ **The RawCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



APPLICATIONS

- Drilling holes in concrete up to Ø 20 mm
- Drilling holes in wood up to Ø 22 mm
- Drilling holes in metal up to Ø 13 mm
- Façades and roofs thermal insulations

TECHNICAL PARAMETERS

Index	R-PRH18-XL2	Impact frequency	0 - 4400 BPM
Battery voltage	18 V	Rotational speed	0 - 1200 RPM
Battery capacity	5,0 AH	Maximum drilling capacity :	
Number of batteries included	2	concrete	20 MM
Charging time	50 MIN	wood	22 MM
Tool holder	SDS - PLUS	metal	13 MM
Impact energy	2,0 J		

OFFER

Index	Power tool	Li-Ion batteries R-BAT-185001 [5.0 AH]	Rawcase R-RC-4414	Packing [box]	Fast charger 6.5A R-CHR-186501	Operating Instructions	Protection gloves	EAN
RAWHAMMER R-PRH18								
R-PRH18-XL2	1	2	1	-	1	1	1	5906675473741
R-PRH18-S	1	-	1	-	-	1	-	5906675475288
R-PRH18-XS	1	-	-	1	-	1	-	5906675475226

RawWRENCH R-PIW18-XL2 IMPACT WRENCH 18V

NEW

➤ **The metal gear housing** facilitates cooling and increases power tool life-time

➤ **1/2" square tool holder** for stable mounting of impact sockets

➤ **LED illuminates** the work place to increase user comfort and safety

➤ **Powerful impact gear** generating up to 1000 Nm allows the power tool to be used for the most demanding fixings applications

➤ **Electronic protection** stop system engages during jamming to protect the user and the power tool



➤ **Powerful brushless motor** ensures high efficiency of the mechanism which increases the life time of the power tool

➤ **Rubberised, profiled handle** increases grip and user ergonomics

➤ **The RawCase system** allows easy and convenient storage of the power tool additional all accessories and the possibility of connecting with other cases for easy transport



APPLICATIONS

- Installation of R-LX screws diameter 8mm -14mm
- Timber constructions: Screwing screws up to Ø 24 mm
- Metal constructions: Assembly of metric screws (up to M24)

TECHNICAL PARAMETERS

Index	R-PIW18-XL2	Tool holder	1/2"
Battery voltage	18 V	Rotational speed	0 - 1900 RPM
Battery capacity	5,0 AH	Impact frequency	0-2800 BPM
Number of batteries included	2	Maximum bolt size	M24
Charging time	50 MIN		
Maximum torque	1000 NM		

OFFER

Index	Power tool	Li-Ion batteries R-BAT-185001 [5.0 AH]	Rawcase R-RC-4414	Packing [box]	Fast charger 6.5A R-CHR-186501	Operating Instructions	Protection gloves	EAN
RAWWRENCH R-PIW18								
R-PIW18-XL2	1	2	1	-	1	1	1	5906675473734
R-PIW18-S	1	-	1	-	-	1	-	5906675475264
R-PIW18-XS	1	-	-	1	-	1	-	5906675475202

RawlWRENCH

R-PID18-XL2
IMPACT DRIVER 18V

NEW

- **Multihead tool holder** - 1/4" hexagonal shank for bits and 1/2" square for sockets provides broad usability of the power tool
- **LED illuminates** the workplace to increase user comfort and safety
- Drilling mode **enables efficient use** in timber and wood-based materials
- **Rubberised, profiled handle** increases grip and user ergonomics
- **Compact design and lightweight construction** reduces fatigue during long-term use
- **Electronic protection stop system** engages during jamming to protect the user and the power tool
- **Auto Stop Control ASC**, torque cut off mode prevents damage to the material surface during screwing



- **Powerful brushless motor** ensures high efficiency of the mechanism which increases the life time of the power tool
- **Electronic adjustable torque range** to match power tool parameters for specific applications
- **Hook for suspending the screwdriver** on the belt facilitates work in places where it is not possible to put the tool down
- **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



APPLICATIONS

- Timber constructions: Screwing screws up to Ø 14 mm
- Metal constructions: Assembly of metric screws (up to M14)
- Installation of R-LX concrete screws up to Ø 8 mm
- Frame pins and others up to Ø 14 mm (e.g. FF1, 4ALL)
- Sheet metal drilling up to Ø 10 mm x 2 mm thick
- Wooden constructions: Drilling in wood or chipboard (up to Ø 30 mm)

TECHNICAL PARAMETERS

Index	R-PID18-XL2	Maximum torque	210 NM
Battery voltage	18 V	Tool holder	1/4" HEX / 1/2"
Battery capacity	5,0 AH	Rotational speed	0-1100/2600/3200RPM
Number of batteries included	2	Impact frequency	0-1200/2700/3800BPM
Charging time	50 MIN	Maximum bolt size	M14

OFFER

Index	Power tool	Li-Ion batteries R-BAT-185001 [5.0 AH]	Rawlcase R-RC-4414	Packing [box]	Fast charger 6.5A R-CHR-186501	Operating Instructions	Protection gloves	EAN
RAWLWRENCH R-PID18								
R-PID18-XL2	1	2	1	-	1	1	1	5906675473727
R-PID18-S	1	-	1	-	-	1	-	5906675475257
R-PID18-XS	1	-	-	1	-	1	-	5906675475196

RawlDRIVER

R-PDD18-XL2
DRILL DRIVER 18V

NEW

- **16 + 1 positions of the clutch** allows optimal selection of torque for driving of bolts and screws of different sizes depending on the type of substrate
- **The single-sleeve 13 mm drill chuck** makes it easy to install all accessories
- **Planetary gear parts** are made of high quality steel to increase the tool life-time
- **The LED illuminates** the workplace to increase the user comfort and safety
- **Hook for suspending the screwdriver** on the belt, facilitates work in places where it is not possible to put the tool down
- **Two Li-Ion batteries** with 5.0 Ah capacity and a 50 minute fast charger are included with the set guarantee uninterrupted work



- **Two gears** allow you to adjust the speed and torque to your job
- **Powerful brushless motor** ensures high efficiency of the mechanism which increases the life time of the power tool
- **Compact design and lightweight construction** reduces fatigue during long-term use
- **Ergonomically positioned left / right rotation switch** allows a convenient and quick change between screwing and unscrewing
- **Rubberised, profiled handle** increases grip and user ergonomics
- **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting additional cases for easy transport

APPLICATIONS

- Timber constructions: Screwing screws up to Ø 6 mm
- Metal constructions: Assembly of metric screws (up to M6)
- Frame pins and others up to Ø 14 mm (e.g. FF1, 4ALL)
- Drilling in sheet metal with a thickness of 2 mm to Ø 10mm
- Wooden constructions: Drilling in wood or chipboard (up to Ø 32 mm) or chipboard (up to Ø 32 mm)

TECHNICAL PARAMETERS

Index	R-PDD18-XL2	Number of clutch settings	16 + 1
Battery voltage	18 V	Chuck	1,5 - 13 MM
Battery capacity	5,0 AH	Rotational speed 1st gear	0 - 550 RPM
Number of batteries included	2	Rotational speed 2nd gear	0 - 2000 RPM
Charging time	50 MIN	Maximum drilling diameter in wood	Ø 36 MM
Maximum torque	60 NM	Maximum drilling diameter in metal	Ø 13 MM

OFFER

Index	Power tool	Li-Ion batteries R-BAT-185001 [5.0 AH]	Rawlcase R-RC-4414	Packing [box]	Fast charger 6.5A R-CHR-186501	Operating Instructions	Protection gloves	EAN
RAWLDRIVER R-PDD18								
R-PDD18-XL2	1	2	1	-	1	1	1	5906675473703
R-PDD18-S	1	-	1	-	-	1	-	5906675475240
R-PDD18-XS	1	-	-	1	-	1	-	5906675475189

RawlDRIVER R-PDS18-M2A DRYWALL SCREWDRIVER 18V

NEW

- > **Precise adjustment of the screw depth** allows accurate assembly
- > **Compact design and lightweight construction** reduces fatigue during long-term use
- > **Rubberised, profiled handle** increases grip and user ergonomics
- > **Cover for selective screwdriving** for precise work
- > **Automatic screw feeder** for serial screwdriving and faster work
- > **1/4" hexagonal tool holder** for quick mounting of bits
- > **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport
- > **The switch lock button** for continuous operation improves ergonomics and speeds up work
- > **Version basic** for everyone
- > **Hook for suspending the screwdriver** on the belt facilitates work in places where it is not possible to put the tool down



APPLICATIONS

- Metal profiles: Screwing screws up to Ø 4.2 mm
- Timber profiles: Driving screws up to Ø 4.2 mm
- Drywall panels assembly: Driving screws up to 57 mm long
- Partition walls, plasterboard assembly

TECHNICAL PARAMETERS

Index	R-PDS18-M2A	Tool holder	1/4" HEX
Battery voltage	18 V	Rotational speed	5000 RPM
Battery capacity	2,0 AH	Maximum screws diameter	2,5 - 4,2 MM
Number of batteries included	2	Maximum screws length	20 - 57 MM
Charging time	60 MIN		

OFFER

Index	Powertool	Automatic screw feeder R-DS-AF1	LI-Ion batteries R-BAT-182001 [2.0 Ah]	Rawlcase R-RC-4414	Packing [box]	Fast charger 1.5A R-CHR-181501	Operating instructions	Protection gloves	EAN
RAWLDRIVER R-PDS18									
R-PDS18-M2A	1	1	2	1	-	1	1	1	5906675473710
R-PDS18-S	1	-	-	1	-	-	1	-	5906675475271
R-PDS18-XS	1	-	-	-	1	-	1	-	5906675475219

RawlGRINDER R-PAG18-XL2 ANGLE GRINDER 18V

NEW

- > **Powerful brushless motor** ensures high efficiency of the mechanism and increases the life time of the tool
- > **Rubberised, profiled handle** increases grip and user ergonomics
- > **A safety sliding switch** prevents unintentional starting of the machine
- > **High dust resistance** increases the life-time of the angle grinder
- > **The electronic motor brake system** stops the disc as soon as the grinder is switched off for additional safe operation
- > **Compact design and lightweight construction** reduces fatigue during long-term use
- > **The RawlCase system** allows easy and convenient storage of the power tool with all accessories and the possibility of connecting with additional cases for easy transport



APPLICATIONS

- Timber constructions: Barking/grinding wood
- Grinding and cutting of stainless and carbon steels
- Grinding and cutting of concrete and reinforced lintels

TECHNICAL PARAMETERS

Index	R-PAG18-XL2	Charging time	50 MIN
Battery voltage	18 V	Disc diameter	125 MM
Battery capacity	5,0 AH	Spindle diameter	22,2 MM
Number of batteries included	2	Rotational speed	8 500 RPM

OFFER

Index	Powertool	LI-Ion batteries R-BAT-185001 [5.0 Ah]	Rawlcase R-RC-4414	Packing [box]	Fast charger 6.5A R-CHR-186501	Operating instructions	Protection gloves	EAN
RAWLGRINDER R-PAG18								
R-PAG18-XL2	1	2	1	-	1	1	1	5906675473758
R-PAG18-S	1	-	1	-	-	1	-	5906675475295
R-PAG18-XS	1	-	-	1	-	1	-	5906675475233



R-RC RawlCASE THE SYSTEM'S TRANSPORT CASE

NEW

The system's transport case, which connects to cases of different dimensions, enables convenient transport of tools and power tools.



➤ **One case** for many tools

➤ **High mechanical strength** -suitcase made of **ABS material**

➤ **Easy to transport and store**

➤ The cases can be connected together

➤ Load capacity of the handle **up to 70 kg**

➤ Static pressure resistance **up to 100 kg**



RawHAMMER R-PRH18

RawWRENCH R-PIW18

RawWRENCH R-PID18

RawDRIVER R-PDD18

RawDRIVER R-PDS18

RawGRINDER R-PAG18



R-PGL PROTECTIVE GLOVES FOR POWER TOOLS

Protective gloves with special cushions to reduce vibration when working with power tools

NEW

➤ **Strengthening the glove on a part of the thumb** prevents the material from rubbing when working with power tools



➤ Made of **high quality materials** such as synthetic leather, protect hands while working

➤ **Strong bur prevents** the glove from slipping during use

➤ **Special pads on the inside** of the glove provide better grip and partially suppress the vibration so that the work is not burdensome

R-PGO SAFETY GLASSES FOR POWER TOOLS

Very light eyewear with polycarbonate class 1FT lenses according to EN 166 with a removable insert Dual TPR

NEW

➤ It fills the gap between the eyewear and the wearer's face, thereby significantly **reducing the possibility of an injury to the eyes from projectiles** and/or other dangerous objects.


➤ **The clear lenses** protect against UV radiation according to EN 170



➤ **The lenses feature anti-fog and anti-scratch protection.**

➤ **Resistant to impact** with low energy flying particles

*Available from 2021

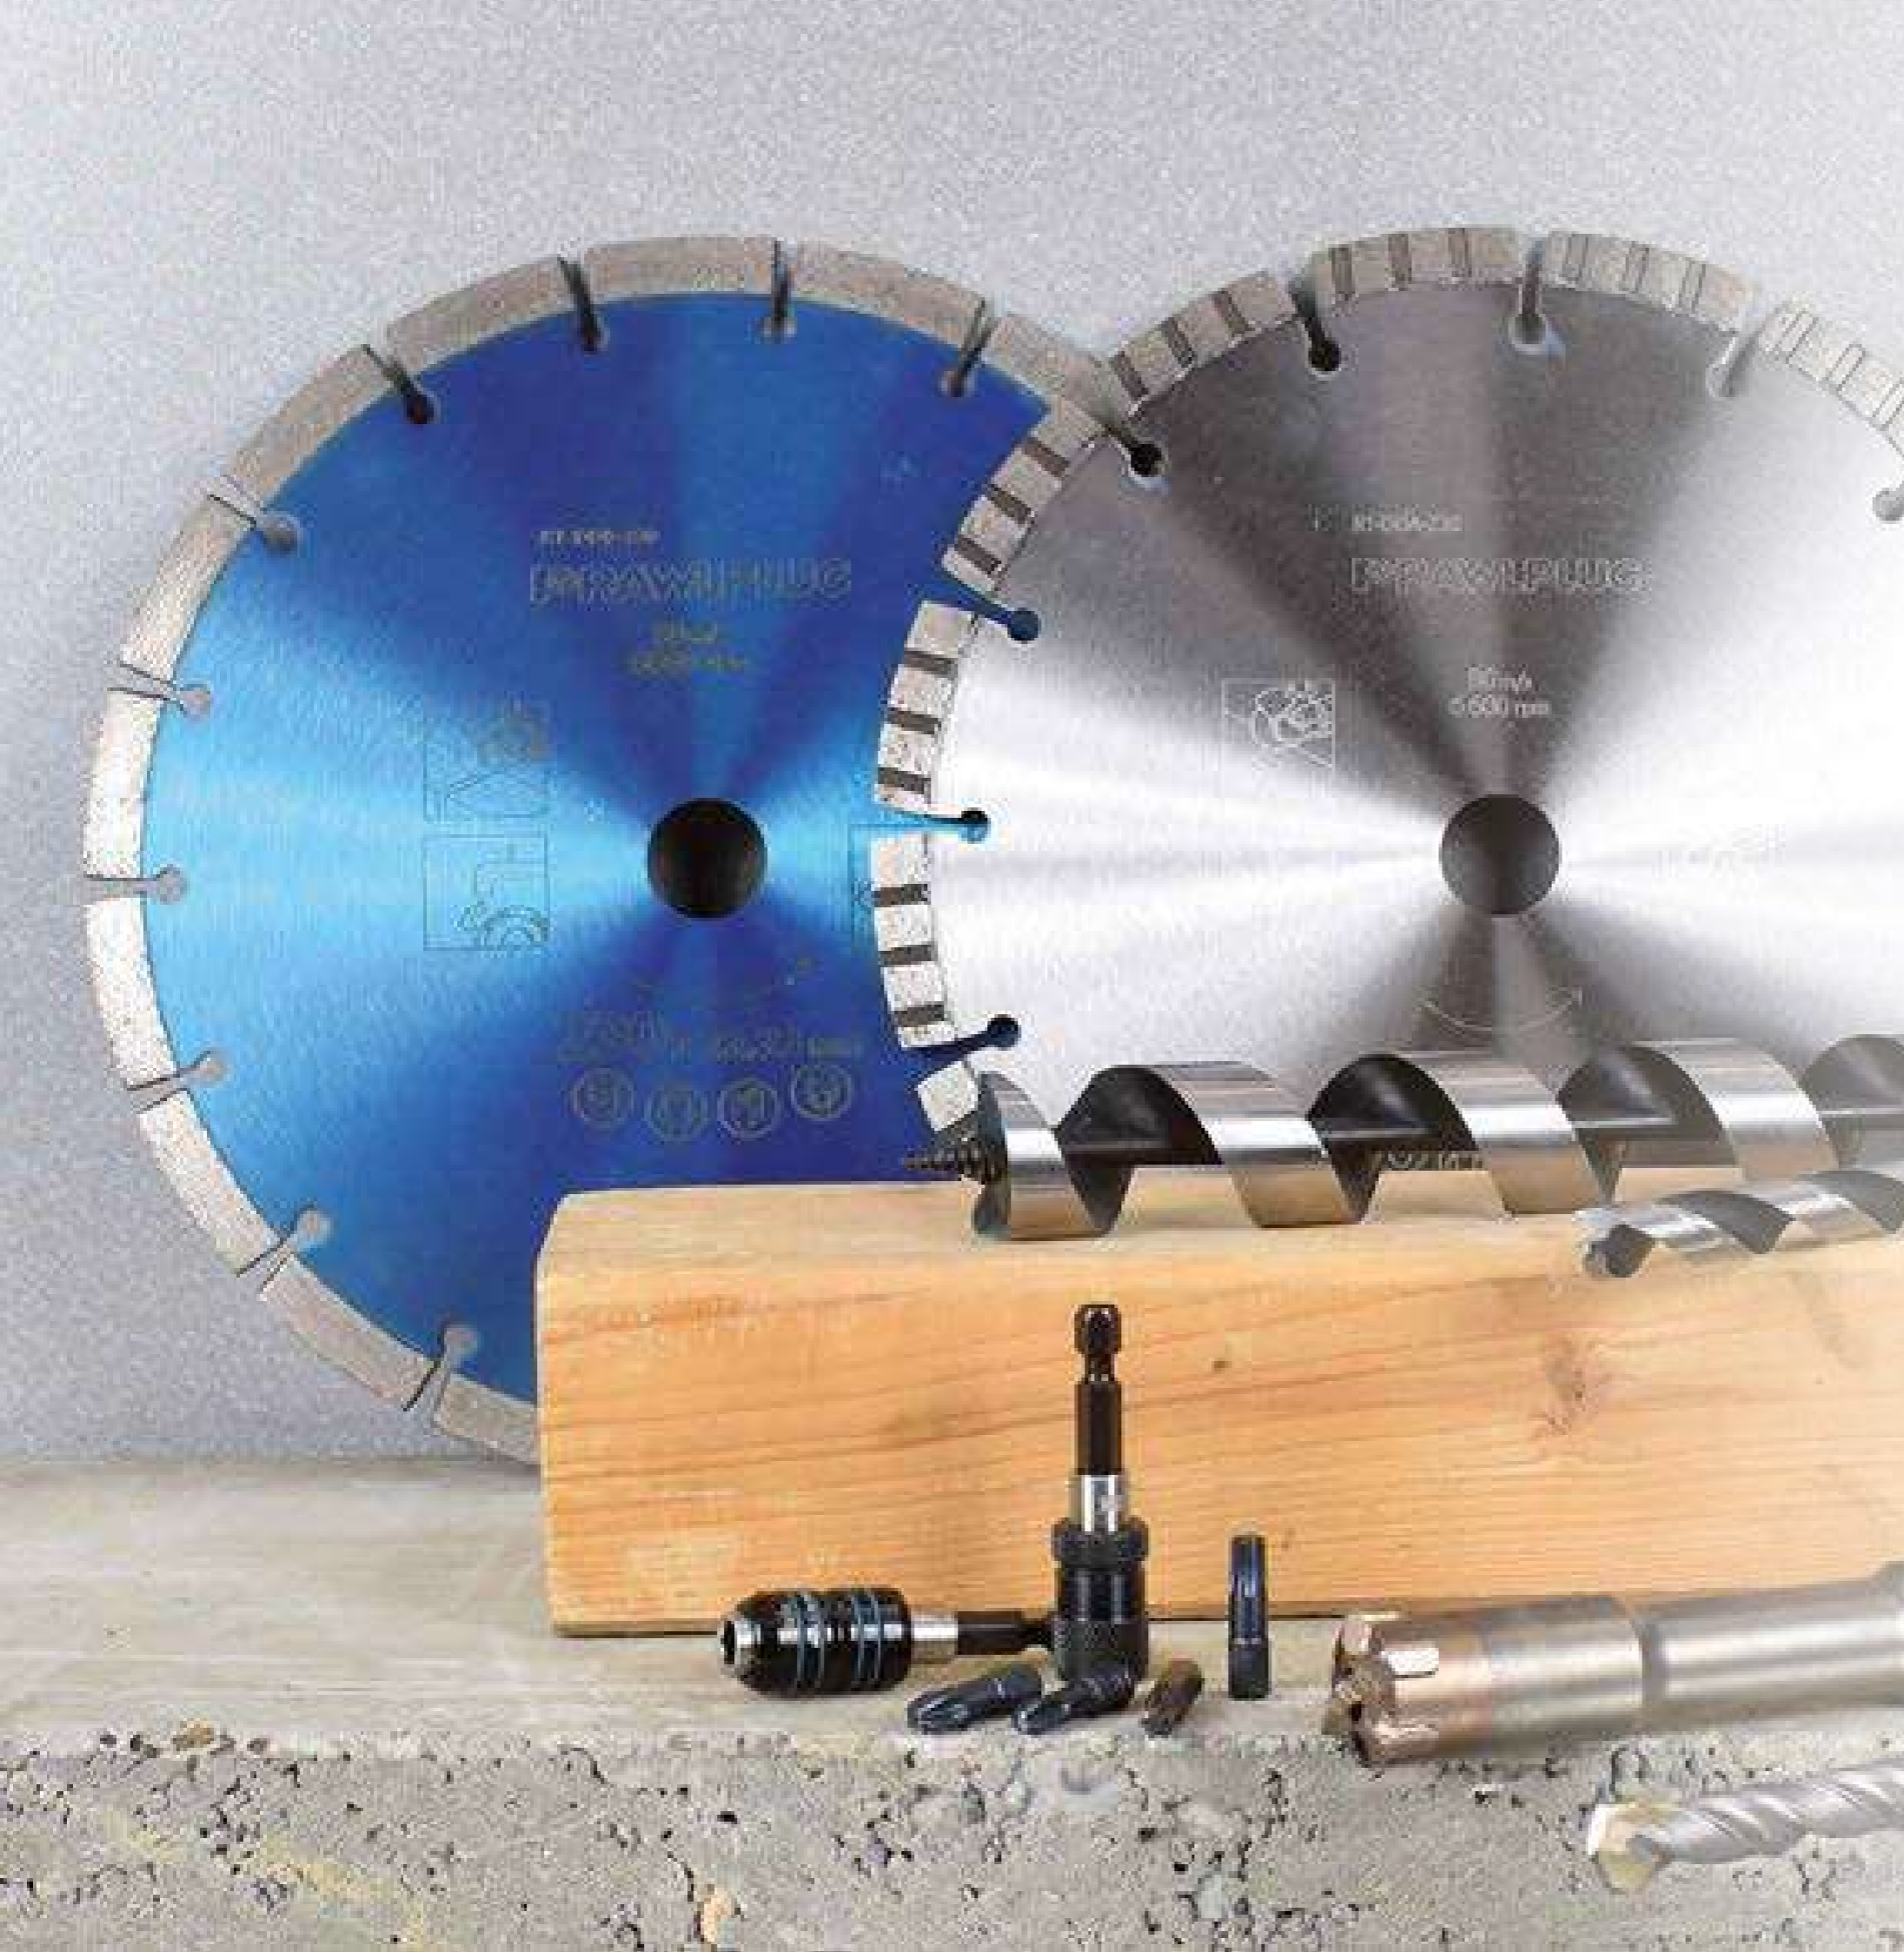

” Power Tool Accessories

Drill bits	46
Drill bits and chisels for concrete	47
Sds max	48
Sds plus	53
Drill bits for steel	67
Drill bits for wood	71
Bits, bit holders and sockets	75
Bits	76
Bit holders	81
Sockets	81
Diamond discs and Saws	83
Diamond discs	84
Cutting wheels	86
Saws	91

POWER TOOL ACCESSORIES

DRILL BITS FOR ALL YOUR APPLICATIONS

FOR ANCHORING AND CREATING LASTING CONNECTIONS




Use the e-learning training or sign up for our hands-on training.

▪ Drill bits - general characteristics

www.rawplug.com

SOLID WALLS



AGGRESSOR

Drill bits for fast drilling in concrete




REBARDRILL

High-quality SDS plus and SDS max drill bits for drilling in reinforced concrete



DUSTLESSDRILL

Hollow drill bits SDS plus and SDS max for dust-free drilling in concrete



TURBODRILL

SDS max drill bits for drilling deep holes in reinforced concrete




BRICKDRILL

Drill bits with reduced SDS plus shank for non-impact drilling in ceramic materials and hollow concrete blocks




METAL



RT-HSSC

Cobalt HSS drill bits for a precise drilling in stainless steel



RT-HSSP

Ground HSS drill bits for a precise drilling in steel and non-ferrous metal



RT-HSSL

Ground HSS drill bits, extended, for a precise drilling of deep holes in steel and non-ferrous metal



RT-HSSD

Double ended HSS ground bits for drilling holes for rivets in steel plates



WOOD



RT-AWD

Auger bits for fast drilling in wood, without the need of applying much force




RT-FLWD

Flat drill bits with a reinforced shank for a fast drilling of holes, high in diameter, in wood and wood-based materials



RT-FWD

Formwork drill bits for drilling deep holes in timber and light construction materials



RT-PDW

Drill bits with two blades and Centre point for drilling holes in wood



ACCESSORIES >

DRILL BITS

FOR CONCRETE, STEEL, WOOD

RT-HSS GROUND DRILL BITS FOR A PRECISE DRILLING IN STEEL AND NON-FERROUS METAL

Drill bits made of **high-quality HSS steel**, which ensures high durability

Ground spiral enables you to drill precisely

Double-sided geometry of the point (SPLIT POINT) ensures ideal Centre and reduces pressure while drilling

AUGER BITS FOR FAST DRILLING IN WOOD, WITHOUT THE NEED OF APPLYING MUCH FORCE

Geometry of the drill bit head with a self-homing threaded cone enables you to guide the drill bit until the hole is drilled

Ground edges of the head allows you to drill quickly without the need of applying much force

Very wide and deep spiral allows you to remove a great amount of chippings, which increases drilling speed

TURBODRILL SDS MAX DRILL FOR DRILLING DEEP HOLES IN REINFORCED CONCRETE, CONCRETE, STONE AND HARD BRICK

6 front cutting edges in the carbide tip to enable **drilling in reinforced concrete**


4 side cutting edges in the carbide tip to ensure perfectly axial holes

6 lateral tip stabilisers to reduce vibration level and ensure optimum operating conditions for high-power hammer drills

DRILL BITS FOR CONCRETE

IN TERMS OF ANCHORING AND CREATING LASTING CONNECTIONS

DUSTLESSDRILL



Hollow drill bits SDS plus and SDS max for dust-free drilling in concrete



AGGRESSOR



Drill bits for fast drilling in concrete



REBARDRILL



High-quality SDS plus and SDS max drill bits for drilling in reinforced concrete



TURBODRILL



SDS max drill bits for drilling deep holes in reinforced concrete



BRICKDRILL



Drill bits with reduced SDS plus shank for non-impact drilling in ceramic materials and hollow concrete blocks



RT-MAXH HOLLOW DRILL BITS DUSTLESSDRILL SDS MAX

Hollow drill bits SDS max for dust-free drilling in reinforced concrete



CERTIFICATE ✓



FEATURES AND BENEFITS ✓

- Two holes in the tip of the drill bit allows you to drill and extract dust simultaneously (due to the possibility of fastening a vacuum cleaner)
- Drilling, along with dust extraction, make the hole smooth and clean
- Quick removal of dust increases drilling speed and enhances drill bit durability (reduces friction)
- Drilled holes do not require cleaning before fastening, which greatly reduces assembly time
- Rubber adapter, which is built-in the bit, enables you to fasten a vacuum cleaner hose and to drill holes without dust

APPLICATIONS ✓

- Drilling holes in reinforced concrete, concrete, stone and hard brick



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		[mm]	[mm]	[mm]	[pcs]	[kg]
Ø14	RT-MAXH-14/600	14	600	400	1	0.82
Ø16	RT-MAXH-16/600	16	600	400	1	0.92
Ø18	RT-MAXH-18/600	18	600	400	1	0.99
Ø20	RT-MAXH-20/600	20	600	400	1	1.13
Ø22	RT-MAXH-22/600	22	600	400	1	1.13
Ø25	RT-MAXH-25/600	25	600	400	1	1.12
Ø28	RT-MAXH-28/600	28	600	400	1	1.29
Ø30	RT-MAXH-30/600	30	600	400	1	1.44
Ø32	RT-MAXH-32/600	32	600	400	1	1.48
Ø35	RT-MAXH-35/600	35	600	400	1	1.59

RT-MAXT TURBODRILL SDS MAX

SDS max drill for drilling deep holes in reinforced concrete, concrete, stone and hard brick



CERTIFICATE ✓




FEATURES AND BENEFITS ✓

- Steel with specification 34CrNiMo6 provides high strength and durability
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international SicherSafe certificate
- Optimized drill geometry allows making axial and cylindrical holes, perfect for mounting
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- The drill core is subjected to special heat treatment, which increases its flexibility, resistance to twisting and prevents breaking
- Monolithic, one-piece carbide tip with 10 cutting edges, including 6 front and 4 side edges, enabling easy and fast drilling in reinforced concrete without damaging.

APPLICATIONS ✓

- Drilling holes in reinforced concrete, concrete, stone and hard brick



RT-MAXT TURBODRILL SDS MAX (cont.)

Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		[mm]	[mm]	[mm]	[pcs]	[kg]
Ø12	RT-MAXT-12/340	12	340	200	1	0.38
	RT-MAXT-12/540	12	540	400	1	0.48
Ø14	RT-MAXT-14/340	14	340	200	1	0.40
	RT-MAXT-14/540	14	540	400	1	0.59
Ø15	RT-MAXT-15/340	15	340	200	1	0.44
	RT-MAXT-15/540	15	540	400	1	0.59
Ø16	RT-MAXT-16/340	16	340	200	1	0.44
	RT-MAXT-16/540	16	540	400	1	0.59
Ø16	RT-MAXT-16/690	16	690	550	1	0.70
	RT-MAXT-18/340	18	340	200	1	0.50
	RT-MAXT-18/690	18	690	550	1	0.89
Ø18	RT-MAXT-18/540	18	540	400	1	0.72
	RT-MAXT-20/340	20	340	200	1	0.55
Ø20	RT-MAXT-20/540	20	540	400	1	0.82
	RT-MAXT-20/690	20	690	550	1	1.04
Ø22	RT-MAXT-22/340	22	340	200	1	0.60
	RT-MAXT-22/540	22	540	400	1	0.93
	RT-MAXT-22/690	22	690	550	1	1.17
Ø24	RT-MAXT-24/340	24	340	200	1	0.67
	RT-MAXT-24/540	24	540	400	1	1.05
	RT-MAXT-24/690	24	690	550	1	1.31
Ø25	RT-MAXT-25/340	25	340	200	1	0.74
	RT-MAXT-25/540	25	540	400	1	1.14
Ø25	RT-MAXT-25/690	25	690	550	1	1.50
	RT-MAXT-26/340	26	340	200	1	0.74
Ø26	RT-MAXT-26/540	26	540	400	1	1.18
	RT-MAXT-26/690	26	690	550	1	1.33
Ø28	RT-MAXT-28/340	28	340	200	1	0.83
	RT-MAXT-28/540	28	540	400	1	1.20
Ø28	RT-MAXT-28/690	28	690	550	1	1.69
	RT-MAXT-30/340	30	340	200	1	0.87
Ø30	RT-MAXT-30/540	30	540	400	1	1.34
	RT-MAXT-30/690	30	690	550	1	1.89
Ø32	RT-MAXT-32/340	32	340	200	1	0.88
	RT-MAXT-32/540	32	540	400	1	1.47
Ø35	RT-MAXT-35/340	35	340	200	1	0.97
	RT-MAXT-35/540	35	540	400	1	1.96
Ø35	RT-MAXT-35/690	35	690	550	1	2.10
	RT-MAXT-36/540	36	540	400	1	1.95
Ø38	RT-MAXT-38/340	38	340	200	1	1.10
	RT-MAXT-38/540	38	540	400	1	1.74
Ø38	RT-MAXT-38/690	38	690	550	1	2.33
	RT-MAXT-40/540	40	540	400	1	2.00
Ø42	RT-MAXT-42/540	42	540	400	1	2.28
Ø45	RT-MAXT-45/540	45	540	400	1	2.28

RT-MAXR REBARDRILL SDS MAX

SDS max drill with 3 symmetrically arranged cutting edges allow, for drilling holes in reinforced concrete, concrete, stone and hard brick



RT-MAXR REBAR DRILL SDS MAX (cont.)

CERTIFICATE




FEATURES AND BENEFITS

- Monolithic carbide tip increases the life of the drill bit
- Centre point for quick commencement of drilling without the drill slipping
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Angle tip 135° allows drilling in reinforced concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international Sicher Safe certificate

APPLICATIONS

- Drilling holes in reinforced concrete, concrete, stone and hard brick



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		[mm]	[mm]	[mm]	[pcs]	kg
Ø12	RT-MAXR-12/340	12	340	200	1	0.38
	RT-MAXR-12/540	12	540	400	1	0.48
Ø14	RT-MAXR-14/340	14	340	200	1	0.51
	RT-MAXR-14/540	14	540	400	1	0.40
Ø15	RT-MAXR-15/340	15	340	200	1	0.44
	RT-MAXR-15/540	15	540	400	1	0.59
Ø16	RT-MAXR-16/340	16	340	200	1	0.44
	RT-MAXR-16/540	16	540	400	1	0.59
Ø18	RT-MAXR-18/340	18	340	200	1	0.50
	RT-MAXR-18/540	18	540	400	1	0.72
Ø20	RT-MAXR-20/340	12	340	200	1	0.55
	RT-MAXR-20/540	20	540	400	1	0.82

RT-MAXC CONNECTOR SDS MAX

System of extensions and connector SDS max allows drilling deep holes



FEATURES AND BENEFITS

- A special system of extensions and connector SDS max allows drilling deep holes in reinforced concrete
- Two slots SDS max allows the application of extensions and drill bits in one adapter
- The connector provides fast and secure connections between drill bit and extension
- The special design of the connector allows the transfer of 100% impact power

APPLICATIONS

- Deep hole drilling by drill bits SDS max above 32 mm



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-MAXC-ADAP	190	1	0.64
RT-MAXC-320	320	1	0.59
RT-MAXC-750	750	1	1.44
RT-MAXC-1100	1100	1	2.14

RT-MAXA-PC POINT CHISELS SDS MAX

Specially shaped point chisel for quick chipping of concrete




FEATURES AND BENEFITS

- 4 spiral cutting edges to prevent wedging of the chisel in the concrete
- Concave surfaces on the chisel's point allow the transfer of 100% of the impact energy

APPLICATIONS

- Chiselling and chipping concrete, brick and other construction materials



Rawplug code	Drill diameter	Length	Quantity	Weight
	mm	mm	pcs	kg
RT-MAXA-PC-18/280	18	280	1	0.49
RT-MAXA-PC-18/400	18	400	1	0.88

RT-MAXA-FT FLAT CHISEL SDS MAX

Flat chisels for heavy-duty work in concrete



FEATURES AND BENEFITS

- The wide chipping tip of the chisel allows for faster work
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation

APPLICATIONS


- Chiselling and chipping concrete, old tiles and terracotta



Rawplug code	Width	Length	Quantity	Weight
	[mm]	[mm]	[pcs]	kg
RT-MAXA-FT-24/280	24	280	1	0.30
RT-MAXA-FT-24/400	24	400	1	0.73
RT-MAXA-FT-50-360	50	360	1	0.71

RT-MAXA-CH CHANNEL CHISEL SDS MAX

Chisel for quick grooving and fissuring

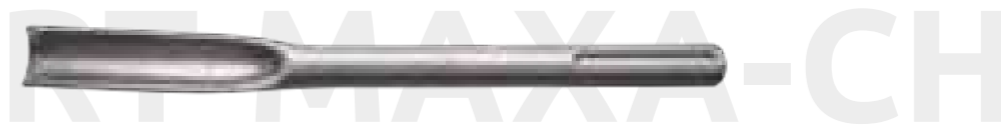


FEATURES AND BENEFITS

- The special shape of the chisel allows making grooves without the need for cutting the surface
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation

APPLICATIONS

- Chisel designed to make grooves and slots in concrete, stone and brick



Rawplug code	Width	Length	Quantity	Inner box weight
	[mm]	mm	pcs	kg
RT-MAXA-CH-26/301	26	300	1	0.30

RT-MAXA-BH CHANNEL CHISEL SDS MAX

Channelling chisel for fast grooving at a constant depth in brick and light construction materials



FEATURES AND BENEFITS

- Special oval-shaped chisel with 3 sharp edges makes it easy to penetrate the material
- Additional side flaps allow chipping at a constant depth and provide additional support during the removal of material
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation

APPLICATIONS

- Channelling chisel for grooving in brick and light construction materials



Rawplug code	Width	Length	Quantity	Inner box weight
	[mm]	mm	pcs	kg
RT-MAXA-BH-35/380	35	380	1	0.30

RT-MAXA-BUSHH BUSH HAMMER SDS MAX

Bush hammer chisel for levelling concrete surfaces




FEATURES AND BENEFITS

- The chisel plane with a width of 45 mm and 16 teeth allows aligning concrete surfaces
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation

APPLICATIONS

- Chisel for levelling concrete surfaces



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-MAXA-BUSHH	300	1	1.09

RT-SDSA DRILL BITS AGGRESSOR SDS PLUS

Drill bits SDS plus for fast drilling in concrete



CERTIFICATE



FEATURES AND BENEFITS

- Centre point for quick commencement of drilling without the drill slipping
- 160° angle tip allows for quick drilling in concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- Aggressive grooves allow fast extraction of material and increase the drilling speed
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international Sicher Safe certificate

APPLICATIONS

- Drilling holes in concrete, brick and stone
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø4	RT-SDSA-4/110	4	110	50	1	0.04
	RT-SDSA-5/110	5	110	50	1	0.04
	RT-SDSA-5/160	5	160	100	1	0.04
Ø5	RT-SDSA-5/160B12	5	160	100	12	0.50
	RT-SDSA-5/210	5	210	150	1	0.04
	RT-SDSA-5/310	5	310	250	1	0.06
	RT-SDSA-5/310B12	5	310	250	12	9.12
	RT-SDSA-5/360	5	360	300	1	0.07
	RT-SDSA-5/460	5	460	400	1	0.08
Ø5.5	RT-SDSA-55/110	5.5	110	50	1	0.04
	RT-SDSA-55/160	5.5	160	100	1	0.04
	RT-SDSA-55/260	5.5	260	200	1	0.06
	RT-SDSA-55/310	5.5	310	250	1	0.06
Ø6	RT-SDSA-55/460	5.5	460	400	1	0.09
	RT-SDSA-6/110	6	110	50	1	0.04
	RT-SDSA-6/160	6	160	100	1	0.05
	RT-SDSA-6/160B12	6	160	100	12	6.84
	RT-SDSA-6/210	6	210	150	1	0.05
	RT-SDSA-6/210B12	6	210	150	12	0.65
	RT-SDSA-6/260	6	260	200	1	0.10
Ø6.5	RT-SDSA-6/310	6	310	250	1	0.06
	RT-SDSA-6/310B12	6	310	250	12	10.61
	RT-SDSA-6/360	6	360	300	1	0.08
	RT-SDSA-6/460	6	460	400	1	0.09
	RT-SDSA-65/110	6.5	110	50	1	0.04
	RT-SDSA-65/160	6.5	160	100	1	0.05
Ø7	RT-SDSA-65/210	6.5	210	150	1	0.06
	RT-SDSA-65/260	6.5	260	200	1	0.06
	RT-SDSA-65/310	6.5	310	250	1	0.07
Ø7	RT-SDSA-7/110	7	110	50	1	0.04
	RT-SDSA-7/160	7	160	100	1	0.05
	RT-SDSA-7/210	7	210	150	1	0.06
	RT-SDSA-7/260	7	260	200	1	0.07
Ø8	RT-SDSA-7/310	7	310	250	1	0.07
	RT-SDSA-8/110	8	110	50	1	0.04
	RT-SDSA-8/160	8	160	100	1	0.06

RT-SDSA DRILL BITS AGGRESSOR SDS PLUS (cont.)

Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight	
		mm	mm	mm	pcs	kg	
Ø8	RT-SDSA-8/160B12	8	160	100	12	8.15	
	RT-SDSA-8/210	8	210	150	1	0.07	
	RT-SDSA-8/210B12	8	210	150	12	0.83	
	RT-SDSA-8/260	8	260	200	1	0.07	
	RT-SDSA-8/260B12	8	260	200	12	0.98	
	RT-SDSA-8/360	8	360	300	1	0.12	
	RT-SDSA-8/310	8	310	250	1	0.08	
	RT-SDSA-8/310B12	8	310	250	12	11.64	
	RT-SDSA-8/410	8	410	350	1	0.14	
	RT-SDSA-8/460	8	460	400	1	0.15	
	RT-SDSA-8/610	8	610	550	1	0.18	
	RT-SDSA-8/1000	8	1000	940	1	0.27	
Ø9	RT-SDSA-9/160	9	160	100	1	0.07	
Ø9.5	RT-SDSA-9.5/260	9.5	260	200	1	0.30	
	RT-SDSA-9.5/310	9.5	310	250	1	0.30	
Ø9.5	RT-SDSA-9.5/410	9.5	410	350	1	0.30	
	RT-SDSA-10/110	10	110	50	1	0.05	
	RT-SDSA-10/160	10	160	100	1	0.07	
Ø10	RT-SDSA-10/160B12	10	160	100	12	12.00	
	RT-SDSA-10/210	10	210	150	1	0.09	
	RT-SDSA-10/210B12	10	210	150	12	1.04	
	RT-SDSA-10/260	10	260	200	1	0.08	
	RT-SDSA-10/260B12	10	260	200	12	1.26	
	RT-SDSA-10/310	10	310	250	1	0.08	
	RT-SDSA-10/310B12	10	310	250	12	12.00	
	RT-SDSA-10/360	10	360	300	1	0.16	
	RT-SDSA-10/410	10	410	350	1	0.16	
	RT-SDSA-10/460	10	460	400	1	0.20	
	RT-SDSA-10/610	10	610	550	1	0.26	
	RT-SDSA-10/1000	10	1000	940	1	0.45	
	Ø11	RT-SDSA-11/260	11	260	200	1	0.12
		RT-SDSA-11/310	11	310	250	1	0.15
		RT-SDSA-11/410	11	410	350	1	0.19
		RT-SDSA-12/160	12	160	100	1	0.09
Ø12	RT-SDSA-12/210	12	210	150	1	0.11	
	RT-SDSA-12/260	12	260	200	1	0.08	
	RT-SDSA-12/310	12	310	250	1	0.17	
	RT-SDSA-12/410	12	410	350	1	0.23	
	RT-SDSA-12/460	12	460	400	1	0.41	
Ø13	RT-SDSA-12/610	12	610	550	1	0.33	
	RT-SDSA-12/1000	12	1000	940	1	0.54	
	RT-SDSA-13/210	13	210	150	1	0.14	
	RT-SDSA-13/260	13	260	200	1	0.17	
Ø14	RT-SDSA-14/160	14	160	100	1	0.11	
	RT-SDSA-14/210	14	210	150	1	0.13	
	RT-SDSA-14/260	14	260	200	1	0.17	
	RT-SDSA-14/310	14	310	250	1	0.20	
Ø15	RT-SDSA-14/460	14	460	400	1	0.25	
	RT-SDSA-14/610	14	610	550	1	0.38	
	RT-SDSA-14/1000	14	1000	940	1	0.62	
	RT-SDSA-15/160	15	160	100	1	0.14	
Ø16	RT-SDSA-15/210	15	210	150	1	0.17	
	RT-SDSA-16/160	16	160	100	1	0.14	
	RT-SDSA-16/210	16	210	150	1	0.18	
Ø16	RT-SDSA-16/260	16	260	200	1	0.21	
	RT-SDSA-16/310	16	310	250	1	0.26	

RT-SDSA DRILL BITS AGGRESSOR SDS PLUS (cont.)

Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø16	RT-SDSA-16/460	16	460	400	1	0.30
	RT-SDSA-16/610	16	610	550	1	0.50
	RT-SDSA-16/1000	16	1000	940	1	0.88
Ø18	RT-SDSA-18/210	18	210	150	1	0.22
	RT-SDSA-18/260	18	260	200	1	0.28
	RT-SDSA-18/310	18	310	250	1	0.32
	RT-SDSA-18/460	18	460	400	1	0.49
	RT-SDSA-18/610	18	610	550	1	0.68
	RT-SDSA-18/1000	18	1000	940	1	1.11
Ø20	RT-SDSA-20/210	20	210	150	1	0.28
	RT-SDSA-20/310	20	310	250	1	0.40
	RT-SDSA-20/460	20	460	400	1	0.53
Ø20	RT-SDSA-20/610	20	610	550	1	0.79
	RT-SDSA-20/1000	20	1000	940	1	1.20
	Ø22	RT-SDSA-22/310	22	310	250	1
Ø22	RT-SDSA-22/460	22	460	400	1	0.70
	Ø24	RT-SDSA-24/310	24	310	250	1
Ø24	RT-SDSA-24/460	24	460	400	1	0.83
	Ø25	RT-SDSA-25/310	25	310	250	1
Ø25	RT-SDSA-25/460	25	460	400	1	0.96
	RT-SDSA-25/610	25	610	550	1	1.32
	RT-SDSA-25/1000	25	1000	940	1	2.31
Ø26	RT-SDSA-26/460	26	460	400	1	0.94
Ø30	RT-SDSA-30/460	30	460	400	1	1.10

RT-SDSA-SET1 DRILL BITS SET AGGRESSOR SDS PLUS 3 PCS

Drill bits SDS plus for fast drilling in concrete



CERTIFICATE



FEATURES AND BENEFITS

- Centre point for quick commencement of drilling without the drill slipping
- 160° angle tip allows for quick drilling in concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- Aggressive grooves allow fast extraction of material and increase the drilling speed
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international Sicher Safe certificate

APPLICATIONS

- Drilling holes in concrete, brick and stone
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Inner box weight
		mm	mm	kg
Ø6; 8; 10	RT-SDSA-SET1	6; 8; 10	160	0.19

RT-SDSA-SET2 DRILL BITS SET AGGRESSOR SDS PLUS 5 PCS

Drill bits SDS plus for fast drilling in concrete



CERTIFICATE ✓



FEATURES AND BENEFITS ✓

- Centre point for quick commencement of drilling without the drill slipping
- 160° angle tip allows for quick drilling in concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- Aggressive grooves allow fast extraction of material and increase the drilling speed
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international Sicher Safe certificate

APPLICATIONS ✓

- Drilling holes in concrete, brick and stone
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Inner box weight
		mm	mm	kg
Ø5; 6; 8; 10; 12	RT-SDSA-SET2	5; 6; 8; 10; 12	160	0.32

RT-SDSB DRILL BITS BRICKDRILL SDS PLUS

Drill bits for non-impact drilling in ceramic materials



CERTIFICATE ✓




FEATURES AND BENEFITS ✓

- Angle tip 120° allows for quick drilling in ceramic materials without damaging the material
- Long drills allow drilling through insulation
- Impact-free drilling by cutting material
- Perfectly straight holes without damaging ceramic bricks
- Short drill winding allows the extraction of dust between the cracks in ceramic blocks
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation

APPLICATIONS ✓

- Drilling holes in ceramic hollow blocks and concrete hollow blocks
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø6	RT-SDSB-6/260	6	260	200	1	0.07
	RT-SDSB-8/260	8	260	200	1	0.10
Ø8	RT-SDSB-8/310	8	310	250	1	0.11
	RT-SDSB-8/460	8	460	400	1	0.20
	RT-SDSB-8/610	8	610	550	1	0.22
Ø10	RT-SDSB-10/260	10	260	200	1	0.29
	RT-SDSB-10/310	10	310	250	1	0.16
	RT-SDSB-10/460	10	460	400	1	0.20

RT-SDSB DRILL BITS BRICKDRILL SDS PLUS (cont.)

Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø12	RT-SDSB-12/260	12	260	200	1	0.17
Ø15	RT-SDSB-15/260	15	260	200	1	0.25
Ø16	RT-SDSB-16/260	16	260	200	1	0.25

RT-SDSG GRANITE DRILL BITS SDS PLUS

NEW

Drill bits SDS plus for drilling holes in granite slabs



CERTIFICATE ✓



FEATURES AND BENEFITS ✓

- The special conical shape of the tip allows drilling in hard granite slabs
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- Aggressive grooves allow fast extraction of material and increase the drilling speed
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international Sicher Safe certificate

APPLICATIONS ✓

- Drilling holes in granite slabs
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Weight
		mm	mm	kg
Ø3	RT-SDSG-3/085	3	85	0.03
Ø4	RT-SDSG-4/110	4	110	0.04
	RT-SDSG-4/160	4	160	0.04
Ø5	RT-SDSG-5/110	5	110	0.04
	RT-SDSG-5/160	5	160	0.04
Ø6	RT-SDSG-6/110	6	110	0.04
	RT-SDSG-6/160	6	160	0.05
Ø8	RT-SDSG-8/110	8	110	0.04
	RT-SDSG-8/160	8	160	0.06
Ø10	RT-SDSG-10/110	10	110	0.05
	RT-SDSG-10/160	10	160	0.07
Ø12	RT-SDSG-12/160	12	160	0.09
Ø14	RT-SDSG-14/160	14	160	0.11
Ø16	RT-SDSG-16/160	16	160	0.14

RT-SDSR DRILL BITS REBARDRILL SDS PLUS

High-quality SDS plus drill bits for drilling in reinforced concrete



CERTIFICATE ✓




FEATURES AND BENEFITS ✓

- Monolithic carbide tip increases the life of the drill bit
- Centre point for quick commencement of drilling without the drill slipping
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Angle tip 135° allows drilling in reinforced concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Steel with specification 34CrNiMo6 provides high strength and durability

APPLICATIONS ✓

- Drilling holes in reinforced concrete, concrete, stone and hard brick
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø5	RT-SDSR-5/110	5	110	50	1	0.04
	RT-SDSR-5/160	5	160	100	1	0.04
	RT-SDSR-5/160B12	5	160	100	12	0.48
	RT-SDSR-5/210	5	210	150	1	0.05
	RT-SDSR-5/360	5	360	300	1	0.07
Ø6	RT-SDSR-6/110	6	110	50	1	0.04
	RT-SDSR-6/160	6	160	100	1	0.05
	RT-SDSR-6/160B12	6	160	100	12	6.84
	RT-SDSR-6/210	6	210	150	1	0.06
	RT-SDSR-6/260	6	260	200	1	0.07
	RT-SDSR-6/310	6	310	250	1	0.06
	RT-SDSR-6/310B12	6	310	250	12	10.61
	RT-SDSR-6/360	6	360	300	1	0.08
Ø7	RT-SDSR-7/160	7	160	100	1	0.05
	RT-SDSR-8/110	8	110	50	1	0.05
	RT-SDSR-8/160	8	160	100	1	0.06
Ø8	RT-SDSR-8/160B12	8	160	100	12	8.15
	RT-SDSR-8/210	8	210	150	1	0.07
	RT-SDSR-8/260	8	260	200	1	0.08
	RT-SDSR-8/310	8	310	250	1	0.10
	RT-SDSR-8/310B12	8	310	250	12	11.64
	RT-SDSR-8/360	8	360	300	1	0.09
	RT-SDSR-8/460	8	460	400	1	0.13
	RT-SDSR-10/110	10	110	50	1	0.05
Ø10	RT-SDSR-10/160	10	160	100	1	0.08
	RT-SDSR-10/160B12	10	160	100	12	12.00
	RT-SDSR-10/210	10	210	150	1	0.09
	RT-SDSR-10/260	10	260	200	1	0.11
	RT-SDSR-10/260B12	10	260	200	12	1.32
	RT-SDSR-10/310	10	310	250	1	0.13
	RT-SDSR-10/310B12	10	310	250	12	12.00
	RT-SDSR-10/360	10	360	300	1	0.14
RT-SDSR-10/460	10	460	400	1	0.30	

RT-SDSR DRILL BITS REBARDRILL SDS PLUS (cont.)

Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø12	RT-SDSR-12/160	12	160	100	1	0.09
	RT-SDSR-12/210	12	210	150	1	0.12
	RT-SDSR-12/260	12	260	200	1	0.14
	RT-SDSR-12/310	12	310	250	1	0.16
	RT-SDSR-12/460	12	460	400	1	0.23
Ø14	RT-SDSR-14/160	14	160	100	1	0.11
	RT-SDSR-14/210	14	210	150	1	0.14
	RT-SDSR-14/260	14	260	200	1	0.16
	RT-SDSR-14/310	14	310	250	1	0.19
	RT-SDSR-14/460	14	460	400	1	0.28
Ø15	RT-SDSR-15/160	15	160	100	1	0.13
	RT-SDSR-15/210	15	210	150	1	0.16
Ø16	RT-SDSR-16/160	16	160	100	1	0.13
	RT-SDSR-16/210	16	210	150	1	0.15
	RT-SDSR-16/260	16	260	200	1	0.18
	RT-SDSR-16/310	16	310	250	1	0.21
	RT-SDSR-16/460	16	460	400	1	0.31
Ø18	RT-SDSR-18/210	18	210	150	1	0.22
	RT-SDSR-18/310	18	310	250	1	0.26
Ø20	RT-SDSR-20/310	20	310	250	1	0.32
	RT-SDSR-20/460	20	460	400	1	0.55

RT-SDSR-SET1 DRILL BITS SET REBARDRILL SDS PLUS 3 PCS

High-quality SDS plus drill bits for drilling in reinforced concrete



CERTIFICATE ✓




FEATURES AND BENEFITS ✓

- Monolithic carbide tip increases the life of the drill bit
- Centre point for quick commencement of drilling without the drill slipping
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Angle tip 135° allows drilling in reinforced concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Steel with specification 34CrNiMo6 provides high strength and durability

APPLICATIONS ✓

- Drilling holes in reinforced concrete, concrete, stone and hard brick
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter	Length	Quantity	Inner box weight
		mm	mm	pcs	kg
Ø6; 8; 10	RT-SDSR-SET1	6; 8; 10	160	1	0.19

RT-SDSR-SET2 DRILL BITS SET REBAR DRILL SDS PLUS 5 PCS

High-quality SDS plus drill bits for drilling in reinforced concrete



CERTIFICATE ✓



FEATURES AND BENEFITS ✓

- Monolithic carbide tip increases the life of the drill bit
- Centre point for quick commencement of drilling without the drill slipping
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Angle tip 135° allows drilling in reinforced concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Steel with specification 34CrNiMo6 provides high strength and durability

APPLICATIONS ✓

- Drilling holes in reinforced concrete, concrete, stone and hard brick
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter		Length	Quantity	Inner box weight
		mm	mm			
Ø5; 6; 8; 10; 12	RT-SDSR-SET2	5; 6; 8; 10; 12		160	1	0.34

RT-SDSF DRILL BITS FRAMEDRILL SDS PLUS

Special SDS plus drill bits dedicated for framework attachments



CERTIFICATE ✓



FEATURES AND BENEFITS ✓

- Monolithic carbide tip increases the life of the drill bit
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Centre point for quick commencement of drilling without the drill slipping
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Reinforced grip allows drilling deep and thin holes without breaking the drill
- The drill bit core is subjected to special heat treatment, which increases its flexibility, resistance to twisting and prevents breaking
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international Sicher Safe certificate

APPLICATIONS ✓

- Drilling holes in reinforced concrete and hard brick for fixing frame
- Suitable for operation with SDS plus hammer drill




Size	Rawplug code	Drill diameter		Length	Working length	Quantity	Inner box weight
		[mm]	[mm]				
Ø6	RT-SDSF-6/260	6		260	200	1	0.07
Ø6.5	RT-SDSF-65/260	6.5		260	200	1	0.08

RT-HCB HOLLOW CORE BITS SDS PLUS

NEW

Hollow core bits for drilling large diameter holes in concrete, brick and stone, ideal for drilling in electrical applications

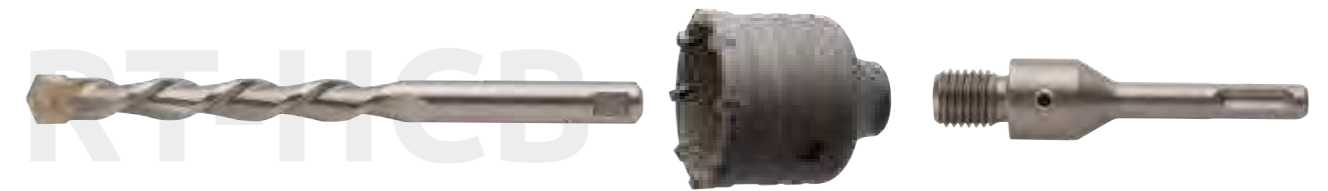


FEATURES AND BENEFITS ✓

- High-temperature soldered carbide plates provide high resistance to chipping and increase service life
- The slanted arrangement of the carbide plates ensures higher drilling efficiency in hard concrete
- Cold forged, internal thread M16, provides to strong connection to the core of the adapter and protects against breaking
- A pilot drill bit with a diameter of 8 mm and a length of 100 mm enables precise drilling start in the selected location
- The lateral counter screw prevents the pilot drill bit from moving in the adapter
- SDS plus holder fits to all rotary hammer drills in this class available on the market

APPLICATIONS ✓

- Drilling holes in concrete, brick and stone
- Suitable for operation with SDS plus hammer drill



Size	Rawplug code	Drill diameter		Length	Inner box weight
		mm	mm		
Ø30	RT-HCB-030-070	30		70	0.16
Ø35	RT-HCB-035-070	35		70	0.21
Ø40	RT-HCB-040-070	40		70	0.23
Ø45	RT-HCB-045-070	45		70	0.26
Ø50	RT-HCB-050-070	50		70	0.31
Ø60	RT-HCB-060-070	60		70	0.39
Ø66	RT-HCB-066-070	66		70	0.43
Ø68	RT-HCB-068-070	68		70	0.44
Ø70	RT-HCB-070-070	70		70	0.47
Ø80	RT-HCB-080-070	80		70	0.54
Ø85	RT-HCB-085-070	85		70	0.60
Ø90	RT-HCB-090-070	90		70	0.65
Ø105	RT-HCB-105-070	105		70	0.82
Ø125	RT-HCB-125-070	125		70	1.12
Ø130	RT-HCB-130-070	130		70	1.14
-	RT-HCB-A100	-		100	0.11
-	RT-HCB-A170	-		170	0.22
-	RT-HCB-A220	-		220	0.29
-	RT-HCB-A320	-		320	0.45
Ø8	RT-HCB-PD8	8		100	0.24

Availability Q2 2019

RT-SDSH HOLLOW DRILL BITS DUSTLESSDRILL SDS PLUS

Hollow drill bits SDS plus for dust-free drilling in concrete



CERTIFICATE ✓




FEATURES AND BENEFITS ✓

- Two holes in the tip of the drill bit allows you to drill and extract dust simultaneously (due to the possibility of fastening a vacuum cleaner)
- Drilling, along with dust extraction, make the hole smooth and clean
- Quick removal of dust increases drilling speed and enhances drill bit durability (reduces friction)
- Drilled holes do not require cleaning before fastening, which greatly reduces assembly time
- Centre point for quick commencement of drilling without the drill slipping
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality

APPLICATIONS ✓

- Drilling holes in reinforced concrete, concrete, stone and hard brick



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø8	RT-SDSH-8/270	8	270	150	1	0.22
Ø10	RT-SDSH-10/270	10	270	150	1	0.25
Ø12	RT-SDSH-12/320	12	320	200	1	0.31
Ø14	RT-SDSH-14/370	14	370	250	1	0.39
Ø15	RT-SDSH-15/370	15	370	250	1	0.50
Ø16	RT-SDSH-16/370	16	370	250	1	0.43
Ø18	RT-SDSH-18/370	18	370	250	1	0.53
Ø20	RT-SDSH-20/370	20	370	250	1	0.62
Ø24	RT-SDSH-24/370	24	370	250	1	0.01

RT-SDSD DRILL BITS SDS PLUS WITH COLLAR

Drill bits SDS plus with collar for anchors with internal thread



CERTIFICATE ✓




FEATURES AND BENEFITS ✓

- Monolithic carbide tip increases the life of the drill bit
- Centre point for quick commencement of drilling without the drill slipping
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Angle tip 135° allows drilling in reinforced concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Steel with specification 34CrNiMo6 provides high strength and durability

APPLICATIONS ✓

- Drilling anchor with inner thread in concrete and reinforced concrete
- Suitable for operation with SDS plus hammer drill



RT-SDSD DRILL BITS SDS PLUS WITH COLLAR (cont.)

Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
	mm	mm	mm	pcs	kg
RT-SDSD-8/110	8	110	27	1	0.12
RT-SDSD-10/110	10	110	32	1	0.12
RT-SDSD-12/130	12	130	42	1	0.16
RT-SDSD-15/160	15	160	52	1	0.31

RT-ADAP EXPANDERS SDS PLUS ROOF SYSTEM

Special SDS plus adapters for tapered Roof System drill bits



FEATURES AND BENEFITS ✓

- The high rigidity of the drill adapter system enables accurate and axial drilling through a thick insulation layer
- Possibility of making small diameter holes by piercing through a thick insulation layer
- The kit includes a wedge to easily pull out the drill bit from the adapter holder

APPLICATIONS ✓

- Drilling holes through insulation for façade and roofing mounting
- Suitable for operation with SDS plus hammer drill



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-ADAP-500	500	1	0.42
RT-ADAP-800	800	1	0.62
RT-ADAP-1000	1000	1	0.98

RT-TD DRILL BITS ROOF SYSTEM

Special tapered drill bits for flat roof fixings




FEATURES AND BENEFITS ✓

- Centre point for quick commencement of drilling without the drill slipping
- 160° angle tip allows for quick drilling in concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- Aggressive grooves allow fast extraction of material and increase the drilling speed
- The conical connection between drill and an SDS plus adapter allows the transfer of 100% of impact

APPLICATIONS ✓

- Drilling holes through insulation for façade and roofing mounting
- Suitable for operation with the RoofSystem adapter



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø5	RT-TD-50-110	5	110	50	1	0.04
	RT-TD-50-160	5	160	100	1	0.05

RT-TDR DRILL BITS ROOF SYSTEM

Special tapered drill bits for flat roof fixings



FEATURES AND BENEFITS

- Monolithic carbide tip increases the life of the drill bit
- 3 symmetrically arranged cutting edges allow for perfectly straight and axial drilling
- Angle tip 135° allows drilling in reinforced concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- 3 material extraction surfaces and special shape of the drill facilitate the removal of dust
- Steel with specification 34CrNiMo6 provides high strength and durability
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation

APPLICATIONS

- Drilling holes through insulation for façade and roofing mounting
- Suitable for operation with the RoofSystem adapter



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø5	RT-TDR-50-110	5	110	50	1	0.03
	RT-TDR-50-160	5	160	100	1	0.04

RT-TDC DRILL BITS ROOF SYSTEM WITH COLLAR

Special tapered drill bits with limiter for flat roof fixings




FEATURES AND BENEFITS

- Centre point for quick commencement of drilling without the drill slipping
- 160° angle tip allows for quick drilling in concrete
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- The conical connection between drill and an SDS plus adapter allows the transfer of 100% of impact
- Ring acting as a limiter allows drilling holes at a constant depth
- The cuts in the limiter facilitate drilling through insulation without winding up the insulation around the drill bit

APPLICATIONS

- Drilling holes through insulation for façade and roofing mounting
- Suitable for operation with the RoofSystem adapter



Size	Rawplug code	Drill diameter	Length	Working length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
Ø5	RT-TDC-50-110/25	5	110	25	1	0.07
	RT-TDC-50-110/35	5	110	35	1	0.07
	RT-TDC-50-160/55	5	160	55	1	0.14

RT-SDSA-PC POINT CHISEL SDS PLUS

Specially shaped point chisel for quick chipping of concrete




FEATURES AND BENEFITS

- 4 spiral cutting edges to prevent wedging of the chisel in the concrete
- Concave surfaces on the chisel's point allow the transfer of 100% of the impact energy
- Steel with specification 34CrNiMo6 provides high strength and durability

APPLICATIONS

- Chiselling and chipping concrete, brick and other construction materials



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-SDSA-PC-12/250	250	1	0.18

RT-SDSA-FC FLAT CHISELS SDS PLUS

SDS plus flat chisels for chipping tiles, terracotta, brick and concrete




FEATURES AND BENEFITS

- Wide chipping surface significantly accelerates work
- Steel with specification 34CrNiMo6 provides high strength and durability
- The appropriate length of the chisel provides comfortable maneuvering

APPLICATIONS

- Chipping tiles, terracotta, brick and concrete



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-SDSA-FC-20/250	250	1	0.40
RT-SDSA-FC-40/250	250	1	0.30

RT-SDSA-CH CHANNEL CHISEL SDS PLUS

SDS plus channeling chisel for grooving in concrete and brick



FEATURES AND BENEFITS

- The special shape of the chisel allows making grooves without the need for cutting the surface
- Steel with specification 34CrNiMo6 provides high strength and durability

APPLICATIONS

- Grooving concrete and masonry



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-SDSA-CH-22/250	250	1	0.30

RT-IMP MASONRY DRILL BITS IMPACTOR

High-quality masonry drill bits consuming 20% less battery power while drilling hammer Cordless drill



CERTIFICATE



FEATURES AND BENEFITS

- Specially sharpened carbide plate allows for quick and cylindrical drilling
- Very deep seating of carbide plate significantly improves connection with the drill core, which affects quality
- High-quality carbide plate increases the quality of drilled holes and reduces by 20% battery power while drilling hammer Cordless drill
- Heat treated, which increases the hardness of the steel to 52 HRC for optimal resistance during operation
- Extremely high quality, cylindricity and axial alignment of drilled holes, confirmed by international SicherSafe certificate

APPLICATIONS

- Drilling in concrete, solid and hollow brick
- Suitable for operation with impact drill and cordless drill



Size	Rawplug code	Drill diameter	Length	Quantity	Inner box weight
		mm	mm	pcs	kg
Ø3	RT-IMP-030-060	3	60	1	0.01
Ø4	RT-IMP-040-075	4	75	1	0.01
Ø5	RT-IMP-050-085	5	85	1	0.01
	RT-IMP-050-150	5	150	1	0.13
Ø5.5	RT-IMP-055-095	5.5	95	1	0.01
	RT-IMP-055-150	5.5	150	1	0.13
Ø6	RT-IMP-060-100	6	100	1	0.02
	RT-IMP-060-150	6	150	1	0.15
Ø6.5	RT-IMP-065-100	6.5	100	1	0.02
	RT-IMP-065-150	6.5	150	1	0.15
Ø7	RT-IMP-070-100	7	100	1	0.02
	RT-IMP-070-150	7	150	1	0.20
Ø8	RT-IMP-080-120	8	120	1	0.04
	RT-IMP-080-150	8	150	1	0.25
	RT-IMP-080-200	8	200	1	0.43
	RT-IMP-080-300	8	300	1	0.18
Ø10	RT-IMP-100-120	10	120	1	0.05
	RT-IMP-100-150	10	150	1	0.33
	RT-IMP-100-200	10	200	1	0.45
	RT-IMP-100-300	10	300	1	0.28
Ø12	RT-IMP-120-200	12	200	1	0.43
	RT-IMP-120-300	12	300	1	0.38
Ø14	RT-IMP-140-300	14	300	1	0.45
	RT-IMP-140-400	14	400	1	0.18
Ø16	RT-IMP-160-300	16	300	1	0.58
	RT-IMP-160-400	16	400	1	0.20
Ø18	RT-IMP-180-400	18	400	1	0.25
Ø20	RT-IMP-200-400	20	400	1	0.30

RT-HSSC HSS COBALT DRILL BITS

Cobalt HSS drill bits for a precise drilling in stainless steel



FEATURES AND BENEFITS

- Drill bits made of high-quality HSS M35 steel, which contains 5% of cobalt, enhancing hardness, heat resistance, which increases their durability and life time
- Cobalt content allows you to drill in stainless steel and hard steel
- Ground spiral enables you to drill precisely
- Double-sided geometry of the point (SPLIT POINT) ensures ideal Centre and reduces pressure while drilling
- Point angle of 135° enables you to drill in hard steel
- Manufactured to DIN 338 standard, which ensures constant parameters and sizes of the drill bits

APPLICATIONS

- Drilling holes in stainless steel and steel with higher hardness



Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø1	RT-HSSC-010	1	34	2	1	1.60
Ø1.5	RT-HSSC-015	1.5	40	2	1	1.72
Ø2	RT-HSSC-020	2	49	2	1	1.26
Ø2.5	RT-HSSC-025	2.5	57	2	1	1.44
Ø3	RT-HSSC-030	3	61	2	1	1.56
Ø3.1	RT-HSSC-031	3.1	63	1	1	1.11
Ø3.2	RT-HSSC-032	3.2	65	1	1	1.11
Ø3.3	RT-HSSC-033	3.3	68	1	1	1.11
Ø3.5	RT-HSSC-035	3.5	70	1	1	1.19
Ø4	RT-HSSC-040	4	75	1	1	1.19
Ø4.1	RT-HSSC-041	4.1	75	1	1	1.26
Ø4.2	RT-HSSC-042	4.2	78	1	1	1.26
Ø4.3	RT-HSSC-043	4.3	78	1	1	1.26
Ø4.5	RT-HSSC-045	4.5	80	1	1	1.33
Ø4.8	RT-HSSC-048	4.8	82	1	1	1.26
Ø4.9	RT-HSSC-049	4.9	84	1	1	1.26
Ø5	RT-HSSC-050	5	86	1	1	1.32
Ø5.1	RT-HSSC-051	5.1	90	1	1	1.32
Ø5.5	RT-HSSC-055	5.5	93	1	1	1.44
Ø6	RT-HSSC-060	6	93	1	1	1.42
Ø6.5	RT-HSSC-065	6.5	101	1	1	1.64
Ø7	RT-HSSC-070	7	109	1	1	1.80
Ø7.5	RT-HSSC-075	7.5	109	1	1	2.00
Ø8	RT-HSSC-080	8	117	1	1	1.30
Ø8.5	RT-HSSC-085	8.5	117	1	1	1.42
Ø9	RT-HSSC-090	9	125	1	1	1.36
Ø9.5	RT-HSSC-095	9.5	125	1	1	1.44
Ø10	RT-HSSC-100	10	133	1	1	1.64
Ø11	RT-HSSC-110	11	142	1	1	1.71
Ø12	RT-HSSC-120	12	151	1	1	1.94
Ø13	RT-HSSC-130	13	151	1	1	2.18

RT-HSSP HSS DRILL BITS

Ground HSS drill bits for a precise drilling in steel and non-ferrous metal



FEATURES AND BENEFITS

- Drill bits made of high-quality HSS steel, which ensures high durability
- Ground spiral enables you to drill precisely
- Double-sided geometry of the point (SPLIT POINT) ensures ideal Centre and reduces pressure while drilling
- Point angle of 135° enables you to drill in hard steel
- Manufactured to DIN 338 standard, which ensures constant parameters and sizes of the drill bits

APPLICATIONS

- Drilling holes in carbon steel, aluminum and non-ferrous materials



Size	Rawplug code	Drill diameter	Length	Quantity in pouch and square tube	Quantity	Inner box weight
		mm	mm	pcs	[pcs]	kg
Ø1	RT-HSSP-010	1	34	3	1	1.72
	RT-HSSP-010-B10	1	34	10	1	1.26
Ø1.2	RT-HSSP-012-B10	1.2	38	10	1	1.44
Ø1.5	RT-HSSP-015	1.5	40	3	1	2.02
	RT-HSSP-015-B10	1.5	40	10	1	1.56
Ø1.9	RT-HSSP-019-B10	1.9	46	10	1	0.96
Ø2	RT-HSSP-020	2	49	3	1	1.56
	RT-HSSP-020-B10	2	49	10	1	1.74
Ø2.2	RT-HSSP-022-B10	2.2	53	10	1	1.20
Ø2.4	RT-HSSP-024-B10	2.4	57	10	1	1.44
Ø2.5	RT-HSSP-025	2.5	57	3	1	1.62
	RT-HSSP-025-B10	2.5	57	10	1	2.04
Ø2.7	RT-HSSP-027-B10	2.7	61	10	1	1.62
Ø2.8	RT-HSSP-028-B10	2.8	61	10	1	1.80
Ø2.9	RT-HSSP-029-B10	2.9	61	10	1	1.92
Ø3	RT-HSSP-030	3	61	3	1	1.80
	RT-HSSP-030-B10	3	61	10	1	2.28
Ø3.1	RT-HSSP-031	3.1	63	2	1	1.36
	RT-HSSP-031-B10	3.1	63	10	1	2.40
Ø3.2	RT-HSSP-032	3.2	65	2	1	1.36
	RT-HSSP-032-B10	3.2	65	10	1	2.40
Ø3.3	RT-HSSP-033	3.3	68	2	1	1.36
	RT-HSSP-033-B10	3.3	68	10	1	2.58
Ø3.4	RT-HSSP-034-B10	3.4	70	10	1	2.10
Ø3.5	RT-HSSP-035	3.5	70	2	1	1.53
	RT-HSSP-035-B10	3.5	70	10	1	3.12
Ø3.6	RT-HSSP-036-B10	3.6	70	10	1	2.16
Ø3.7	RT-HSSP-037-B10	3.7	70	10	1	2.22
Ø3.8	RT-HSSP-038-B10	3.8	75	10	1	2.82
Ø3.9	RT-HSSP-039-B10	3.9	75	10	1	3.24
Ø4	RT-HSSP-040	4	75	2	1	1.54
	RT-HSSP-040-B10	4	75	10	1	4.08
Ø4.1	RT-HSSP-041	4.1	75	2	1	1.68

RT-HSSP HSS DRILL BITS (cont.)

Size	Rawplug code	Drill diameter	Length	Quantity in pouch and square tube	Quantity	Inner box weight
		mm	mm	pcs	[pcs]	kg
Ø4.1	RT-HSSP-041-B10	4.1	75	10	1	4.38
Ø4.2	RT-HSSP-042	4.2	78	2	1	1.26
	RT-HSSP-042-B10	4.2	78	10	1	4.68
Ø4.3	RT-HSSP-043	4.3	78	2	1	1.82
	RT-HSSP-043-B10	4.3	78	10	1	3.44
Ø4.5	RT-HSSP-045	4.5	80	2	1	1.89
	RT-HSSP-045-B10	4.5	80	10	1	5.00
Ø4.8	RT-HSSP-048	4.8	82	2	1	1.38
	RT-HSSP-048-B10	4.8	82	10	1	5.35
Ø4.9	RT-HSSP-049	4.9	84	2	1	1.80
	RT-HSSP-049-B10	4.9	84	10	1	4.48
Ø5	RT-HSSP-050	5	86	2	1	1.92
	RT-HSSP-050-B10	5	86	10	1	5.90
Ø5.1	RT-HSSP-051	5	86	1	1	1.32
	RT-HSSP-051-B10	5.1	90	10	1	5.95
Ø5.2	RT-HSSP-052	5.2	86	1	1	40.74
	RT-HSSP-052-B10	5.2	86	10	1	2.28
Ø5.5	RT-HSSP-055	5.5	93	1	1	1.44
	RT-HSSP-055-B10	5.5	93	10	1	6.92
Ø6	RT-HSSP-060	6	93	1	1	1.05
	RT-HSSP-060-B10	6	93	10	1	8.12
Ø6.1	RT-HSSP-061-B10	6.1	101	10	1	3.60
Ø6.2	RT-HSSP-062-B10	6.2	101	10	1	2.52
Ø6.5	RT-HSSP-065	6.5	101	1	1	1.64
Ø6.5	RT-HSSP-065-B10	6.5	101	10	1	9.94
Ø6.8	RT-HSSP-068-B10	6.8	109	10	1	0.84
Ø7	RT-HSSP-070	7	109	1	1	1.45
	RT-HSSP-070-B10	7	109	10	1	11.31
Ø7.5	RT-HSSP-075	7.5	109	1	1	2.00
	RT-HSSP-075-B5	7.5	109	5	1	7.50
Ø8	RT-HSSP-080	8	117	1	1	0.98
	RT-HSSP-080-B5	8	117	5	1	3.50
Ø8.2	RT-HSSP-082-B5	8.2	117	5	1	2.50
Ø8.5	RT-HSSP-085	8.5	117	1	1	1.08
	RT-HSSP-085-B5	8.5	117	5	1	3.90
Ø9	RT-HSSP-090	9	125	1	1	1.36
	RT-HSSP-090-B5	9	125	5	1	4.70
Ø9.5	RT-HSSP-095	9.5	125	1	1	1.44
	RT-HSSP-095-B5	9.5	125	5	1	5.04
Ø10	RT-HSSP-100	10	133	1	1	1.32
	RT-HSSP-100-B5	10	133	5	1	5.84
Ø10.2	RT-HSSP-102-B5	10.2	133	5	1	8.52
Ø10.5	RT-HSSP-105-B5	10.5	133	5	1	1.34
Ø11	RT-HSSP-110	11	142	1	1	1.71
	RT-HSSP-110-B5	11	142	5	1	2.75
Ø12	RT-HSSP-120	12	151	1	1	1.94
	RT-HSSP-120-B5	12	151	5	1	3.45
Ø12.5	RT-HSSP-125-B5	12.5	151	5	1	1.60
Ø13	RT-HSSP-130	13	151	1	1	2.18
	RT-HSSP-130-B5	13	151	5	1	3.90

RT-HSSL HSS LONG DRILL BITS

Ground HSS drill bits, extended, for a precise drilling of deep holes in steel and non-ferrous metal




FEATURES AND BENEFITS

- Drill bits made of high-quality HSS steel, which ensures high durability
- Ground spiral enables you to drill precisely
- Double-sided geometry of the point (SPLIT POINT) ensures ideal Centre and reduces pressure while drilling
- Point angle of 135° enables you to drill in hard steel
- Manufactured to DIN 340 standard, which ensures constant parameters and sizes of long drill bits

APPLICATIONS

- Drilling deep holes in carbon steel, aluminum and non-ferrous materials



Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø2	RT-HSSL-020	2	85	2	1	1.86
Ø2.5	RT-HSSL-025	2.5	95	2	1	1.92
Ø3	RT-HSSL-030	3	100	2	1	1.74
Ø3.5	RT-HSSL-035	3.5	112	1	1	1.52
Ø4	RT-HSSL-040	4	119	1	1	1.40
Ø4.5	RT-HSSL-045	4.5	126	1	1	1.08
Ø5	RT-HSSL-050	5	132	1	1	1.20
Ø5.5	RT-HSSL-055	5.5	139	1	1	1.54
Ø6	RT-HSSL-060	6	139	1	1	1.76
Ø6.5	RT-HSSL-065	6.5	148	1	1	1.89
Ø7	RT-HSSL-070	7	156	1	1	1.96
Ø7.5	RT-HSSL-075	7.5	156	1	1	2.16
Ø8	RT-HSSL-080	8	165	1	1	2.14
Ø8.5	RT-HSSL-085	8.5	168	1	1	2.38
Ø9	RT-HSSL-090	9	175	1	1	2.40
Ø9.5	RT-HSSL-095	9.5	175	1	1	2.58
Ø10	RT-HSSL-100	10	184	1	1	2.97
Ø11	RT-HSSL-110	11	195	1	1	2.90
Ø12	RT-HSSL-120	12	205	1	1	3.70
Ø13	RT-HSSL-130	13	205	1	1	3.44

RT-HSSD DOUBLE ENDED HSS DRILL BITS

Double ended HSS ground bits for drilling holes for rivets in steel plates



FEATURES AND BENEFITS

- Double-sided sharpening of the tips allow you to work with one drill bit for a longer time
- Point angle of 135° enables you to drill in hard steel
- Double-sided geometry of the point (SPLIT POINT) ensures ideal Centre and reduces pressure while drilling
- Drill bits made of high-quality HSS steel, which ensures high durability
- Ground spiral enables you to drill precisely

APPLICATIONS

- Drilling holes for rivets in aluminum, steel plates and non-ferrous materials



RT-HSSD DOUBLE ENDED HSS DRILL BITS (cont.)

Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø3.2	RT-HSSD-032	3.2	49	2	1	1.32
Ø3.3	RT-HSSD-033	3.3	49	2	1	7.50
Ø4.1	RT-HSSD-041	4.1	55	2	1	15.30
Ø4.2	RT-HSSD-042	4.2	55	2	1	1.62
Ø4.9	RT-HSSD-049	4.9	62	2	1	1.44
Ø5.2	RT-HSSD-052	5.2	62	2	1	1.80

RT-AWD AUGER BITS

Auger bits for fast drilling in wood, without the need of applying much force



FEATURES AND BENEFITS

- Geometry of the drill bit head with a self-homing threaded cone enables you to guide the drill bit until the hole is drilled
- Ground edges of the head allows you to drill quickly without the need of applying much force
- Very wide and deep spiral allows you to remove a great amount of chippings, which increases drilling speed
- Made of high-quality hardened alloy steel, which ensure high durability
- Profile of the coil with a single groove ensures a smoother hole surface
- Hexagonal end of the drill bit prevents rotating inside the drill chuck

APPLICATIONS

- Drilling holes large in diameter in wood, timber and wood-based materials



Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø10	RT-AWD-100-400	10	400	1	1	2.48
Ø12	RT-AWD-120-400	12	400	1	1	2.25
Ø14	RT-AWD-140-400	14	400	1	1	2.45
Ø16	RT-AWD-160-400	16	400	1	1	1.97
Ø18	RT-AWD-180-400	18	400	1	1	2.20
Ø20	RT-AWD-200-400	20	400	1	1	2.40
Ø22	RT-AWD-220-400	22	400	1	1	2.75
Ø24	RT-AWD-240-400	24	400	1	1	2.48
Ø25	RT-AWD-250-400	25	400	1	1	3.66
Ø26	RT-AWD-260-400	26	400	1	1	2.92
Ø28	RT-AWD-280-400	28	400	1	1	3.24
Ø30	RT-AWD-300-400	30	400	1	1	2.69

RT-FWD FORMWORK DRILL BITS

Formwork drill bits for drilling deep holes in timber and light construction materials



FEATURES AND BENEFITS

- Made of high-quality hardened alloy steel, which ensure high durability
- Point angle of 118° allows you to drill in wood and light construction materials
- Difference in the diameters of working and gripping parts ensure safe work without the jamming of the drill bit in deep holes
- Very long shank of the drill bit allows you to drill deep holes

APPLICATIONS

- Drilling deep holes in wood and other wood-based materials



Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø10	RT-FWD-100-600	10	600	1	1	4.99
Ø12	RT-FWD-120-600	12	600	1	1	4.65
Ø16	RT-FWD-140-600	16	600	1	1	4.32
	RT-FWD-160-600	16	600	1	1	4.42
Ø18	RT-FWD-180-600	18	600	1	1	3.77
Ø20	RT-FWD-200-600	20	600	1	1	3.08

RT-PDW POINT DRILL BITS

Drill bits with two blades and centre point for drilling holes in wood



FEATURES AND BENEFITS

- Made of high-quality hardened alloy steel, which ensure high durability
- Point angle of 118° allows you to drill in wood and light construction materials
- Difference in the diameters of working and gripping parts ensure safe work without the jamming of the drill bit in deep holes
- Very long shank of the drill bit allows you to drill deep holes

APPLICATIONS

- Drilling deep holes in wood and other wood-based materials



Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø3	RT-PDW-030-061	3	61	3	1	1.68
Ø4	RT-PDW-040-075	4	75	2	1	1.47
Ø5	RT-PDW-050-086	5	86	2	1	1.74
Ø6	RT-PDW-060-093	6	600	1	1	1.30
Ø8	RT-PDW-080-117	8	117	1	1	1.20
Ø10	RT-PDW-100-133	10	133	1	1	1.48
Ø12	RT-PDW-120-151	12	151	1	1	1.58
Ø13	RT-PDW-130-151	13	151	1	1	1.04

RT-FLWD FLAT DRILL BITS

Flat drill bits with a reinforced shank for a fast drilling of holes, high in diameter, in wood and wood-based materials



FEATURES AND BENEFITS

- Centre point enables you to start drilling without the drill bit slipping
- Geometry of the drill bit, along with rounded cutting surfaces, allow you to drill very fast
- Made of high-quality hardened alloy steel, which ensure high durability
- Reinforced shank of the drill bit ensures high torsional strength
- 1/4" (6.35mm) grip allows use with most impact drivers available on the market

APPLICATIONS

- For drilling large diameter holes in wood and wood-based materials



Size	Rawplug code	Drill diameter	Length	Quantity in pouch	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
Ø10	RT-FLWD-100-152	10	152	1	1	2.88
Ø12	RT-FLWD-120-152	12	152	1	1	3.02
Ø14	RT-FLWD-140-152	14	152	1	1	2.82
Ø16	RT-FLWD-160-152	16	152	1	1	2.84
Ø18	RT-FLWD-180-152	18	152	1	1	2.52
Ø20	RT-FLWD-200-152	20	152	1	1	2.58
Ø22	RT-FLWD-220-152	22	152	1	1	2.26
Ø24	RT-FLWD-240-152	24	152	1	1	2.66
Ø25	RT-FLWD-250-152	25	152	1	1	9.70
Ø26	RT-FLWD-260-152	26	152	1	1	2.28
Ø28	RT-FLWD-280-152	28	152	1	1	2.40
Ø30	RT-FLWD-300-152	30	152	1	1	2.86
Ø32	RT-FLWD-320-152	32	152	1	1	2.96
Ø35	RT-FLWD-350-152	35	152	1	1	3.08
Ø40	RT-FLWD-400-152	40	152	1	1	3.08
*	RT-FLWD-ADAP/300	*	300	1	1	3.68

RT-DKW DECKING KIT

NEW

Set of drill bits and adapter for drilling holes in decking and timber




RT-DKW

FEATURES AND BENEFITS

- Special cutter on the drill bit allows you to make perfect holes for the decking screws
- High quality pilot drill bit ensures a long life
- Ring on the drill bit allows for drilling of constant depth
- The 1/4" pin allows you to work with all drills and battery screwdrivers available on the market
- Thanks to the side bolt, you can change the pilot drill easily and quickly

APPLICATIONS

- Drilling holes in hard and exotical wood
- Designed for working with drills and battery screwdrivers with 13 mm chucks



Size	Rawplug code	Drill diameter	Quantity	Inner box weight
		mm	kg	kg
Ø4	RT-DKW-SET040	4	1	0,23
Ø4,5	RT-DKW-SET045	4,5	1	0,25

RT-HS-SET HOLE SAWS SETS

Sets of hole saws ideally suited to work in wood and metal, carried out by electricians and plumbers



RT-HS-SET

FEATURES AND BENEFITS

- The diameters of hole saws are ideally suited to work carried out by electricians and plumbers
- Ground, vacuum-tempered teeth allow for precise drilling and increased product life
- Special spring allows faster excavation of material from the inner part of the hole saw
- Additional locking pins in the adapter allow for drilling large diameters without damaging the thread
- Bimetal blade, allows for drilling holes in wood, plasterboards, steel and non-ferrous metals

APPLICATIONS

- Drilling large diameter holes in metal, aluminum, plastic, wood and wood-based materials



Rawplug code	Diameter range	Box quantity	Quantity	Inner box weight
	mm	pcs	pcs	kg
RT-HS-SET1E	20; 25; 32; 40; 51; 65	9	1	3.71
RT-HS-SET2P	19; 22; 29; 38; 44; 57	9	1	3.35

BITS, BIT HOLDERS AND SOCKETS

Ring and thread of the adapter allow screwing the screws to the desired depth

BIT HOLDER WITH 2 MAGNETS PRECISELY HOLDS THE SCREWS DURING APPLICATION IN A VARIETY OF SUBSTRATES

Powerful internal magnet properly holds the tip and the screw while screwdriving

Additional magnet on the ring for easy screwdriving in hard to reach places, prevents rapid wear of the tip

Precision milled head tip allows for precise fitting into the screw socket

1/4" (6.35mm) grip allows using most screwdrivers and cordless drills on the market

SCREWDRIVER BITS WITH PRECISION MILLED HEAD IN HIGH TOLLERANCE FOR BETTER FITTING TO THE SCREWS

Special steel S2

Specially heat treated in the hardening process to increase the hardness of the tip to 60 HRC

The special shape of the tip increases its resistance to twisting under the so-called torsion effect

Anti-corrosion coating, blue colour, prevents rust

RT-IBIT SCREWDRIVER BITS

Impact screwdriver bits, for a wide range of applications using impact drivers



FEATURES AND BENEFITS

- The hardness of 58-60 HRC allows overcoming the high torque and work with impact wrenches
- Special incisions allow better grip in the machine's holder without losing the tip
- Precisely milled bit head allows a better fit with the screw socket
- Special black anti-corrosion coating protects against rust
- Laser marking of the type of bit allows identifying the bit even after use
- Made in Germany to the highest DIN standards to ensure high quality and service life

APPLICATIONS

- Tightening T type screws, for a wide range of applications using impact wrenches
- Tightening Phillips screws, for a wide range of applications using impact wrenches
- Tightening Pozidriv screws, for a wide range of applications using impact wrenches
- Tightening Hex screws, for a wide range of applications using impact wrenches



Rawplug code	Bite type	Length	Quantity	Inner box weight
		mm	pcs	kg
RT-IBIT-T				
RT-IBIT-T20/25	TORX 20	25	20	0.30
RT-IBIT-T25/25	TORX 25	25	20	0.30
RT-IBIT-T30/25	TORX 30	25	20	0.30
RT-IBIT-T40/25	TORX 40	25	20	0.30
RT-IBIT-PH				
RT-IBIT-PH1/25	Phillips 1	25	20	0.30
RT-IBIT-PH2/25	Phillips 2	25	20	0.30
RT-IBIT-PH3/25	Phillips 3	25	20	0.30
RT-IBIT-PZ				
RT-IBIT-PZ1/25	Pozidriv 1	25	20	0.30
RT-IBIT-PZ2/25	Pozidriv 2	25	20	0.30
RT-IBIT-PZ3/25	Pozidriv 3	25	20	0.30
RT-IBIT-HEX				
RT-IBIT-HEX4/25	HEX 4	25	20	0.30
RT-IBIT-HEX6/25	HEX 6	25	20	0.30

RT-IBIT-ADAP IMPACT BIT HOLDER

Impact adapter designed for use with impact bits, for screwing screws and other fastening applications



FEATURES AND BENEFITS

- Made of high quality stainless steel to increase resistance to damage
- Powerful internal magnet properly holds the tip and the screw while screwdriving
- 1/4" (6.35mm) grip allows use with most impact drivers available on the market

APPLICATIONS

- Designed for use with impact bits for screwing screws and other fastening applications




Rawplug code	Length	Dimensions	Quantity	Inner box weight
	mm	mm	pcs	kg
RT-IBIT-ADAP/58	58	1/4" 6,35	1	0.30

RT-BIT SCREWDRIVER BITS

Screwdriver bits with precision milled head

NEW

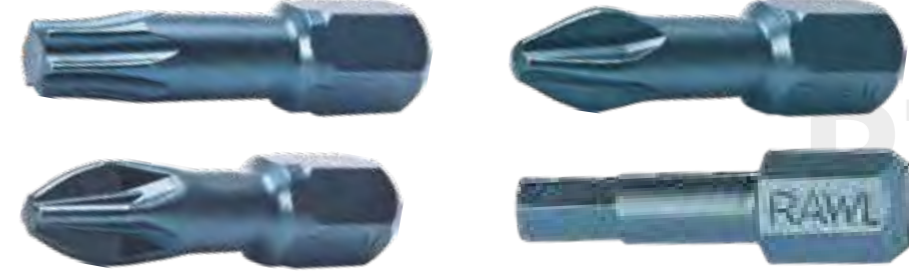

FEATURES AND BENEFITS

- Precision milled head tip allows for precise fitting into the screw socket
- Special steel S2
- Specially heat treated in the hardening process to increase the hardness of the tip to 60 HRC
- The special shape of the tip increases its resistance to twisting under the so-called torsion effect
- Anti-corrosion coating, blue colour, prevents rust

APPLICATIONS

- Screwdriving of T type screws for wood, metal and concrete
- Screwdriving of Phillips screws for wood and drywall
- Screwdriving of Pozidriv screws, a wide range of applications in wood and light mountings



Rawplug code	Size	Length	Quantity in rawlite/blister	Quantity	Inner box weight
		mm	pcs	pcs	kg
RT-BIT-TORX					
RT-BIT-TORX10/25	T10	25	20	1	0.3
RT-BIT-TORX10X3	T10	25	3	1	0.24
RT-BIT-TORX15/25	T15	25	20	1	0.3
RT-BIT-TORX15X3	T15	25	3	1	0.024
RT-BIT-TORX0/25	T20	25	20	1	0.3
RT-BIT-TORX20X3	T20	25	3	1	0.024
RT-BIT-TORX25/25	T25	25	20	1	0.30
RT-BIT-TORX25X3	T25	25	3	1	0.024
RT-BIT-TORX30/25	T30	25	20	1	0.30
RT-BIT-TORX30X3	T30	25	3	1	0.024
RT-BIT-TORX40/25	T40	25	20	1	0.30
RT-BIT-TORX40X3	T40	25	3	1	0.024
RT-BIT-TORX45X3	T45	25	3	1	0.03
RT-BIT-TORX50/25	T50	25	20	1	0.30
RT-BIT-TORX50X3	T50	25	3	1	0.024
RT-BIT-T253040	T25 T30 T40	25	3	1	0.30
RT-BIT-PH					
RT-BIT-PH1/25	PH1	25	20	1	0.30
RT-BIT-PH2/25	PH2	25	20	1	0.30
RT-BIT-PH2/50	PH2	50	10	1	0.30
RT-BIT-PH3/25	PH3	25	20	1	0.30
RT-BIT-PH1X3	PH1	25	3	1	0.024
RT-BIT-PH2X3	PH2	25	3	1	0.024
RT-BIT-PH3X3	PH3	25	3	1	0.024
RT-BIT-PH123	PH1 PH2 PH3	25	3	1	0.024
RT-BIT-PH2/130DS	PH2	130	3	1	0,15
RT-BIT-PZ					
RT-BIT-PZ1/25	PZ1	25	20	1	0.30
RT-BIT-PZ2/25	PZ2	25	20	1	0.30
RT-BIT-PZ2/50	PZ2	50	10	1	0.30
RT-BIT-PZ3/25	PZ3	25	20	1	0.30
RT-BIT-PZ1X3	PZ1	25	3	1	0.024
RT-BIT-PZ2X3	PZ2	25	3	1	0.024
RT-BIT-PZ3X3	PH3	25	3	1	0.024
RT-BIT-PZ123	PZ1 PZ2 PZ3	25	3	1	0.024
RT-BIT-HEX					
RT-BIT-HEX4X3	HEX4	25	3	1	0.024
RT-BIT-HEX4/25	HEX4	25	20	1	0.3
RT-BIT-HEX6/25	HEX6	25	20	1	0.3
RT-BIT-HEX8/25	HEX8	25	20	1	0.3

RT-BIT-HEX HEXAGONAL BITS

Rawplug code	Size	Length	Quantity in rawlite/blister	Quantity	Inner box weight
		mm	pcs	pcs	kg
RT-BIT-HEX4X3	HEX4	25	3	1	0.024
RT-BIT-HEX4/25	HEX4	25	20	1	0.3
RT-BIT-HEX6/25	HEX6	25	20	1	0.3
RT-BIT-HEX8/25	HEX8	25	20	1	0.3

RT-BIT-SET1 BITS SET

High quality bits set



RT-BIT-SET1

FEATURES AND BENEFITS

- Special steel S2 affects the life of the product
- Specially heat treated in the hardening process to increase the hardness of the tip to 60 HRC
- Precision milled head tip allows for precise fitting into the screw socket
- The special shape of the tip increases its resistance to twisting under the so-called torsion effect
- Anti-corrosion coating, blue colour, prevents rust
- High-quality grip for 1/4" bits with a powerful internal magnet
- A dedicated grip 1/4" enables the use of a manual screwdriver

APPLICATIONS

- A set of the most popular types and sizes of bits for screwdriving and fastening applications



Rawplug code	Length	Quantity	Size	Inner box weight
	mm			kg
RT-BIT-SET1	25	1	PH1, PH2, PH3, PZ1, PZ2, PZ3, T20, T30, H4, ADAPTER 60 MM	0.30

RT-BIT-ADAP/2M BIT HOLDER WITH 2 MAGNETS

Bit holder with 2 magnets precisely holds the screws during application in a variety of substrates



RT-BIT-ADAP/2M

FEATURES AND BENEFITS

- Ring and thread of the adapter allow screwing the screws to the desired depth
- Powerful internal magnet properly holds the tip and the screw while screwdriving
- Additional magnet on the ring for easy screwdriving in hard to reach places, prevents rapid wear of the tip
- 1/4" (6.35mm) grip allows using most screwdrivers and cordless drills on the market

APPLICATIONS

- More accurate hold on the screws in application on different substrates



Rawplug code	Size	Length	Inner box weight
		mm	kg
RT-BIT-ADAP/2M	1/4" 6,35	60	0.04

RT-BIT-ADAP/QC BIT HOLDER QUICK CHANGE

Bit holder with quick bit replacement when working with large amounts of various screws



RT-BIT-ADAP/QC

FEATURES AND BENEFITS

- Adapter lock prevents the loss of the tip when screwdriving
- Special ring allows very quick tip replacement
- Powerful internal magnet properly holds the tip and the screw while screwdriving
- 1/4" (6.35mm) grip allows using most screwdrivers and cordless drills on the market

APPLICATIONS

- Quick bit replacement when working with large amounts of various screws



Rawplug code	Size	Length	Quantity	Inner box weight
		mm	pcs	kg
RT-BIT-ADAP/QC	1/4" 6,35	60	1	0.04

RT-BIT-ADAP/SDS BIT HOLDER SDS PLUS

Adapter for bits to enable screw driving with the use of corded and cordless rotary hammer SDS plus



RT-BIT-ADAP/SDS

FEATURES AND BENEFITS

- Stainless steel adapter for increased fault tolerance
- Powerful internal magnet properly holds the tip and the screw while screwdriving
- An SDS plus grip allows working with the majority of hammer drilling machines available on the market

APPLICATIONS

- Screwdriving with the use of corded and cordless rotary hammer SDS plus



Rawplug code	Size	Length	Quantity	Inner box weight
		mm	pcs	kg
RT-BIT-ADAP/SDS	1/4" 6,35	78	1	0.05

RT-BIT-ADAP/60 BIT HOLDER

Holder for 1/4" bits with a powerful internal magnet



RT-BIT-ADAP/60

FEATURES AND BENEFITS

- Stainless steel adapter for increased fault tolerance
- Powerful internal magnet properly holds the tip and the screw while screwdriving
- 1/4" (6.35mm) grip allows using most screwdrivers and cordless drills on the market

APPLICATIONS

- Designed for use with bits for screwing screws and other fastening applications



Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-BIT-ADAP/60	60	1	0.20

RT-BIT-PH2 Phillips/RT-BIT-TX25 T25 LONG SCREWDRIVER BITS

Special long screwdriver bits designed for roof fixings applications



FEATURES AND BENEFITS

- Special steel S2 affects the life of the product
- Head tip subjected to additional heat treatment, increasing hardness to 63 HRC
- Precision milled head tip allows for precise fitting into the screw socket
- Anti-corrosion coating with a satin finish enhances resistance to rust

APPLICATIONS

- Installations of flat roof fixings

Rawplug code	Size	Length	Quantity	Inner box weight
		mm	pcs	kg
RT-BIT-PH2 Phillips				
RT-BIT-PH2/100	PH2	100	1	0.20
RT-BIT-PH2/150	PH2	150	1	0.20
RT-BIT-PH2/200	PH2	200	1	2.40
RT-BIT-PH2/250	PH2	250	1	2.40
RT-BIT-PH2/350	PH2	350	1	0.20
RT-BIT-PH2/450	PH2	450	1	0.20
RT-BIT-TORX25 T25				
RT-BIT-TORX25/100	T25	100	1	2.40
RT-BIT-TORX25/150	T25	150	1	2.40
RT-BIT-TORX25/200	T25	200	1	2.40
RT-BIT-TORX25/250	T25	250	1	0.20
RT-BIT-TORX25/350	T25	350	1	2.40
RT-BIT-TORX25/450	T25	450	1	0.20

RT-TBIT-PH2 SCREWDRIVER BITS PHILLIPS 2 WITH THREAD M6

Screwdriver bits Phillips 2 with thread, designed for roof fixings applications



FEATURES AND BENEFITS

- Special steel S2 affects the life of the product
- Head tip subjected to additional heat treatment, increasing hardness to 63 HRC
- Precision milled head tip allows for precise fitting into the screw socket
- Anti-corrosion coating with a satin finish enhances resistance to rust

APPLICATIONS

- Installations of flat roof fixing

Rawplug code	Size	Length	Working length	Quantity in rawlite/blister	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
RT-TBIT-PH2/M6	PH2	45	35	10	1	0.12

RT-TBIT-TX25 T25 SCREWDRIVER BITS WITH THREAD M6

Screwdriver bits T type 25 with thread, designed for roof fixings applications



FEATURES AND BENEFITS

- Special steel S2 affects the life of the product
- Head tip subjected to additional heat treatment, increasing hardness to 63 HRC
- Precision milled head tip allows for precise fitting into the screw socket
- Anti-corrosion coating with a satin finish enhances resistance to rust

APPLICATIONS

- Installations of flat roof fixing

Rawplug code	Size	Length	Working length	Quantity in rawlite/blister	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
RT-TBIT-T25/M6	T25	45	35	10	1	0.12

RT-TBIT-ADAP ADAPTERS WITH THREAD M6

Adapter for bits with thread M6



FEATURES AND BENEFITS

- Stainless steel adapter for increased fault tolerance
- 1/4" (6.35mm) grip allows using most screwdrivers and cordless drills on the market

APPLICATIONS

- Designed for use with bits for screwing screws and other fastening applications

Rawplug code	Length	Quantity	Inner box weight
	mm	pcs	kg
RT-TBIT-ADAP-250	250	1	0.14
RT-TBIT-ADAP-350	350	1	0.20
RT-TBIT-ADAP-450	450	1	0.26
RT-TBIT-ADAP-650	650	1	0.38
RT-TBIT-ADAP-750	750	1	0.45

RT-IS IMPACT SOCKETS DRIVE 1/4"

Impact sockets designed to overcome the high torsional forces



FEATURES AND BENEFITS

- Special steel S2 with specification 65SiMoCr4 and high hardness extends the life of the product
- An additional black manganese-phosphorus coating protects the product against corrosion
- 1/4" grip hex allows the use of most commercially available impact cappers and cordless screwdrivers
- Ideally milled slot allows good lateral hold of screws and bolts when screwdriving
- Powerful internal magnet holds the bolts and screws while screwdriving

APPLICATIONS

- Screwdriving in concrete, connecting screws, threaded rods and roof fasteners
- Designed to work with hammer drill and cordless screwdriver

Rawplug code	Size	Length	Working length	Quantity in rawlite/blister	Quantity	Inner box weight
		mm	mm	pcs	pcs	kg
RT-TBIT-PH2/M6	PH2	45	35	10	1	0.12

RT-IS IMPACT SOCKETS
DRIVE 1/4" (cont.)

Rawplug code	Size	Length	Quantity	Inner box weight
		mm	pcs	kg
RT-IS-06	6	65	3	0.04
RT-IS-07	7	65	3	0.04
RT-IS-08	8	65	3	0.04
RT-IS-10	10	65	3	0.04
RT-IS-13	13	65	3	0.05

RT-IS LONG IMPACT
SOCKETS 1/2"

Impact sockets designed to overcome the high torsional forces



FEATURES AND BENEFITS

- Special steel S2 with specification 65SiMoCr4 and high hardness extends the life of the product
- Ideally milled slot allows good lateral hold of screws and bolts when screwdriving
- Longer socket enables you to screw in fastenings in hard-to-reach places
- An additional black manganese-phosphorus coating protects the product against corrosion
- 1/2" socket allows you to work with most impact wrenches available on the market

APPLICATIONS

- Screwdriving in concrete, connecting screws, threaded rods and roof fasteners
- Designed to work with impact wrenches 1/2"

RT-IS



Size	Rawplug code	Dimensions	External diameter	Length	Quantity	Inner box weight
		mm	mm	mm	pcs	kg
10	RT-IS-10-1/2L	10	30	78	1	1.68
12	RT-IS-12-1/2L	12	30	78	1	1.94
13	RT-IS-13-1/2L	13	30	78	1	1.99
15	RT-IS-15-1/2L	15	30	78	1	2.82
17	RT-IS-17-1/2L	17	30	78	1	3.10
19	RT-IS-19-1/2L	19	30	78	1	3.11
21	RT-IS-21-1/2L	21	30	78	1	3.50
22	RT-IS-22-1/2L	22	30	78	1	3.83
1/2"	RT-IS-ADAP-1/2	1/2"	1/4"	78	1	0.35

DIAMOND AND ABRASIVE TECHNOLOGY

The hardness of the R-disc is suitable for cutting hard steel including stainless steel

The thickness of the wheel is ideally suited for fast and efficient cutting

High-quality European electrocorundum increases the service life of the wheel

High ring provides extra time for work

The thin cross section of the blade with a reinforced mid-section allows for precise cutting

Compensation grooves cool the discs allowing for dry and wet work

High-quality connection between the ring and the disc increases the service life

High-quality laser connection between the segments and the disc increases the service life and the cutting efficiency

The European diamond ensures high cutting quality

The special shape of the segment enables the cutting of hard materials

Special, patented process of connecting segments with a disc core, reduce vibrations, increasing safety and work efficiency




RT-DDA DIAMOND DISCS TURBO CONCRETE HEAVY DUTY

Segmented turbo type diamond discs for cutting reinforced concrete, paving and hard construction materials



CERTIFICATE



FEATURES AND BENEFITS

- The special shape of the segment enables the cutting of hard materials
- 10 mm high segment provides extra time for work
- Compensation grooves cool the discs allowing for work without cooling water
- High-quality laser connection between the segments and the disc increases the service life and the cutting efficiency
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market

APPLICATIONS


- Cutting of reinforced concrete, paving and hard construction materials
- Suitable for operation with angle grinders




Rawplug code	External [mm]	Internal [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDA-115	115	22.23	10	1	1.62
RT-DDA-125	125	22.23	10	1	1.80
RT-DDA-230	230	22.23	10	1	7.32

RT-DDB DIAMOND DISCS CONCRETE REGULAR DIAMOND

Diamond discs for cutting concrete, brick, airbrick and other building materials



CERTIFICATE



FEATURES AND BENEFITS

- Evenly distributed grains of diamond in the disc segments allows for lasting cutting parameters
- 12 mm high segment provides extra time for work
- High-quality connection between the segments and the disc increases the service life and the cutting efficiency
- Compensation grooves cool the discs allowing for work without cooling water
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market

APPLICATIONS


- Cutting of concrete, brick, airbrick and other building materials
- Suitable for operation with angle grinders




Rawplug code	External [mm]	Internal [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDB-115	115	22.23	12	1	1.57
RT-DDB-125	125	22.23	12	1	1.88
RT-DDB-230	230	22.23	12	1	7.43

RT-DDC DIAMOND DISCS CERAMIC ULTRA THIN

Thin diamond discs for precision cutting of tiles, terracotta and marble and ceramic tiles



CERTIFICATE




FEATURES AND BENEFITS

- The special shape of the diamond ring enables precise and efficient cutting of materials
- High ring provides extra time for work
- The thin cross section of the blade with a reinforced mid-section allows for precise cutting
- Compensation grooves cool the discs allowing for dry and wet work
- High-quality connection between the ring and the disc increases the service life
- The internal bores of 22,23 mm and 25,4 mm allow for use with all angle grinders and stationary cutters available on the market

APPLICATIONS

- Precise cutting of tiles, terracotta, marble and ceramic tiles
- Suitable for operation with angle grinders




RT-DDC DIAMOND DISCS CERAMIC ULTRA THIN (cont.)

Rawplug code	External [mm]	Internal [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDC-115	115	22.23	11	1	1.20
RT-DDC-125	125	22.23	11	1	1.40
RT-DDC-180R	180	25.4	11	1	4.16
RT-DDC-200R	200	25.4	11	1	4.30
RT-DDC-230	230	22.23	11	1	7.54

RT-DDE DISC WITH DIAMOND COATING MULTI

Disc with diamond pour pattern for cutting various materials including aluminum, copper, plastic



CERTIFICATE




FEATURES AND BENEFITS

- Diamond pour pattern allows using the disc for many types of materials
- Side pour pattern prevents wedging of the blade material
- High-quality connection between the diamond pour pattern and the disc increases the service life and the cutting efficiency
- Compensation grooves and compensation bores cooling the discs allow for work without cooling water
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market

APPLICATIONS

- Cutting a variety of materials including aluminum, copper, plastic
- Suitable for operation with angle grinders



Rawplug code	External [mm]	Internal [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDE-125	125	22.23	5	1	1.80

RT-DDT DIAMOND DISCS TURBO CONCRETE HEAVY DUTY EXTREME

NEW

Segmented turbo type diamond discs for cutting reinforced concrete, paving and hard construction materials



CERTIFICATE



FEATURES AND BENEFITS

- The European diamond ensures high cutting quality
- High-quality laser connection between the segments and the disc increases the service life and the cutting efficiency
- The special shape of the segment enables the cutting of hard materials
- 10 mm high segment provides extra time for work
- Special, patented process of connecting segments with a disc core, reduce vibrations, increasing safety and work efficiency
- The internal bore of 22,23 mm and 25,4 mm allows for use with angle grinders and petrol cutting machines available on the market

APPLICATIONS

- Cutting of reinforced concrete, paving and hard construction materials
- Suitable for operation with angle grinders and petrol cutting machines




Rawplug code	External [mm]	Internal [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDT-115	115	22.23	10	1	0,149
RT-DDT-125	125	22.23	10	1	0,174
RT-DDT-230	230	22.23	10	1	0,7
RT-DDT-300	300	25.4	10	1	1,2
RT-DDT-350	350	25.4	10	1	1,65
RT-DDT-400	400	25.4	10	1	2,38


RT-DDW DIAMOND DISC FOR FRESH CONCRETE CUTTING

Diamond disc for fast cutting of wet and fresh concrete

NEW



CERTIFICATE



FEATURES AND BENEFITS

- Characteristic arrangement of diamond segments along with 4 vertical segments enables cutting fresh concrete without damaging the segments and wedging in the material
- High-quality laser connection between the segments and the disc increases the service life and the cutting efficiency
- Special, patented process of connecting segments with a disc core, reduce vibrations, increasing safety and work efficiency
- Special segment shape enables cutting wet concrete
- European diamond grains significantly increase the life of the disc and allow it to uniform abrasion

APPLICATIONS

- Segmented diamond disc, with additional vertical segments for cutting wet concrete
- Adapted to work with stationary cutters manual and wheel petrol cutters

BASE MATERIALS

- Wet and fresh concrete



Rawplug code	External diameter [mm]	Inside diameter [mm]	Number of segments [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDW-300	300	25.4	20	11	1	1.23
RT-DDW-350	350	25.4	24	11	1	1.68

RT-DDS DIAMOND DISC FOR ASPHALT CUTTING

Diamond disc for fast cutting of asphalt and bituminous materials

NEW



CERTIFICATE



FEATURES AND BENEFITS

- Characteristic arrangement of special diamond segments on two levels enables asphalt cutting and other bituminous materials without destruction of disc core
- High-quality laser connection between the segments and the disc increases the service life and the cutting efficiency
- Special, patented process of connecting segments with a disc core, reduce vibrations, increasing safety and work efficiency
- European diamond grains significantly increase the life of the disc and allow it to uniform abrasion
- 25,4 mm and additional drive transfer hole, allow for use with manual and wheel petrol cutters

APPLICATIONS

- Adapted to work with stationary cutters, manual and wheel petrol cutters
- Cutting of asphalt and bituminous materials

BASE MATERIALS

- Asphalt



Rawplug code	External diameter [mm]	Inside diameter [mm]	Number of segments [mm]	Segment height [mm]	Quantity [pcs]	Inner box weight [kg]
RT-DDS-350	350	25.4	21	11	1	1.23
RT-DDS-400	400	25.4	24	11	1	1.68

RT-CDI CUTTING WHEELS FOR STAINLESS STEEL

Angle grinder wheels for fast cutting of steel and stainless steel



CERTIFICATE



FEATURES AND BENEFITS

- High-quality European electrocorundum increases the service life of the wheel
- The hardness of the R-disc is suitable for cutting hard steel including stainless steel
- The thickness of the wheel is ideally suited for fast and efficient cutting
- The resin binder is reinforced with 2 layers of mesh to protect the disc at high speed
- The internal bore of 22.23 mm allows the use of all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS

- Designed for fast cutting of steel and stainless steel



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-CDI-115/1	115	22.23	1	25	0.76
RT-CDI-125/1	125	22.23	1	25	1.01
RT-CDI-230/19	230	22.23	1.9	25	4.86

RT-GDI GRINDING WHEELS FOR STAINLESS STEEL

Angle grinder wheels for grinding stainless steel



CERTIFICATE



FEATURES AND BENEFITS

- High-quality European electrocorundum increases the service life of the wheel
- The hardness of the Q-discs is suitable for grinding hard steel including stainless steel
- The thick wheels are ideally suited to efficient grinding
- The resin binder is reinforced with 2 layers of mesh to protect the disc at high speed
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS

- Designed for grinding stainless steel



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-GDI-115/6	115	22.23	6	10	1.52
RT-GDI-125/6	125	22.23	6	10	1.75

RT-CDS CUTTING WHEELS FOR STONE

Angle grinder wheels for fast cutting of stone



CERTIFICATE




FEATURES AND BENEFITS

- High-quality European carbide increases the service life of the wheels
- The hardness of the R-disc is suitable for cutting hard stone
- The thickness of the wheel is ideally suited for fast and efficient cutting
- The resin binder is reinforced with 2 layers of mesh to protect the disc at high speed
- The internal bore of 22.23 mm allows the use of all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS

- Designed for fast cutting of stone



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-CDS-115/25	115	22.23	2.5	25	1.46
RT-CDS-125/25	125	22.23	2.5	25	1.89
RT-CDS-230/32	230	22.23	3.2	25	6.85

RT-GDS GRINDING WHEELS FOR STONE

Angle grinder wheels for grinding stone



CERTIFICATE



FEATURES AND BENEFITS

- High-quality European carbide increases the service life of the wheels
- The hardness of Q-discs is suitable for grinding stone
- The thick wheels are ideally suited to efficient grinding
- The resin binder is reinforced with 2 layers of mesh to protect the disc at high speed
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS

- Designed for grinding stone and concrete



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-GDS-115/6	115	22.23	6	10	1.43
RT-GDS-125/6	125	22.23	6	10	1.69

RT-CDM CUTTING WHEELS FOR STEEL

Angle grinder wheels for fast cutting of construction steel



FEATURES AND BENEFITS

- High-quality European electrocorundum increases the service life of the wheel
- The hardness of T-disc is suitable for fast cutting of hard construction steel
- The thickness of the wheel is ideally suited for fast and efficient cutting
- The resin binder is reinforced with 2 layers of mesh to protect the disc at high speed
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS


- Designed for fast cutting of construction steel



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-CDM-115/1	115	22.23	1	25	0.76
RT-CDM-125/1	125	22.23	1	25	0.83
RT-CDM-230/19	230	22.23	1.9	25	4.99

RT-CDM CUTTING WHEELS FOR STEEL WITH LARGE CROSS SECTIONS

Corundum wheels for cutting structural steel with large cross-sections



FEATURES AND BENEFITS

- High-quality European electrocorundum increases the service life of the wheel
- The hardness of T-disc is suitable for fast cutting of hard construction steel with large cross sections
- The thickness of the wheel is ideally suited for fast and efficient cutting
- The resin binder is reinforced with 3 layers of mesh to protect the disc at high speed
- The internal bore of 32 mm allows the use of the majority of low-speed stationary cutters
- Manufacture in Poland guarantees high quality

APPLICATIONS


- Designed for cutting structural steel with large cross-sections



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-CDM-300/32	300	32	3.2	10	5.50
RT-CDM-350/35	350	32	3.5	10	8.26
RT-CDM-350/3R	350	25.4	3.5	10	5.50
RT-CDM-400/40	400	32	4	10	11.88

RT-GDM GRINDING WHEELS FOR STEEL

Angle grinder wheels for grinding construction steel



FEATURES AND BENEFITS

- High-quality European electrocorundum increases the service life of the wheel
- The hardness of S-discs is suitable for grinding structural steel
- The thick wheels are ideally suited to efficient grinding
- The resin binder is reinforced with 2 layers of mesh to protect the disc at high speed
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS

- Designed for grinding construction steel



Rawplug code	External [mm]	Internal [mm]	Thickness [mm]	Quantity [pcs]	Inner box weight [kg]
RT-GDM-115/6	115	22.23	6	10	1.67
RT-GDM-125/6	125	22.23	6	10	1.89

RT-FDI ZIRCONIUM FLAP DISCS FOR GRINDING STAINLESS STEEL

Zirconium flap discs for grinding steel and stainless steel



FEATURES AND BENEFITS

- High quality, European, zirconium grain allows grinding stainless steel
- High concentration of evenly spread flaps enhances durability and affects the quality of the material that is being finished
- High-quality adhesive that hold the flaps increases the flap disc durability
- Diverse grit size of the paper allows you to grind the surface precisely
- Designed to work without the need to cool them with water
- The internal bore of 22,23 mm allows for use with all angle grinders available on the market
- Manufacture in Poland guarantees high quality

APPLICATIONS

- Designed for grinding stainless steel



Rawplug code	Size	Diameter	Internal	Quantity	Inner box weight
		[mm]	[mm]	[pcs]	[kg]
RT-FDI-125/40	40	125	22.23	10	0.72
RT-FDI-125/60	60	125	22.23	10	0.72
RT-FDI-125/80	80	125	22.23	10	0.90
RT-FDI-125/100	100	125	22.23	10	0.90
RT-FDI-125/120	120	125	22.23	10	0.90

RT-KLESSCHUCK/13 KEYLESS CHUCK

Keyless chuck for use with impact and non-impact drills up to 900W



FEATURES AND BENEFITS

- Maximum jaw spacing of 13mm allows use with most cylindrical and relief drills
- The 1/2" thread allows use in the most popular drills on the market
- A special „click“ system allows mounting the drill in keyless holders
- Metal structure with an independent ring protects against damage to the handle and the material

APPLICATIONS

- Designed for use with impact and non-impact drills up to 900W



Rawplug code	Diameter	Mounting	Quantity	Inner box weight
	[mm]	[inch]	[pcs]	kg
RT-KLESSCHUCK/13	13	1/2"	1	2.10

RT-CHUCK/13 CHUCK WITH KEY

Chuck with key for use with impact and non-impact drills up to 900W



FEATURES AND BENEFITS

- Maximum jaw spacing of 13mm allows use with most cylindrical and relief drills
- Designed for use with impact and non-impact drills up to 900W
- The 1/2" thread allows use in the most popular drills on the market
- Metal structure provides high strength, also while working with hammer drills
- Comes with a 13 mm key and a counter screw providing good fastening of the drill

APPLICATIONS

- Designed for use with impact and non-impact drills up to 900W



Rawplug code	Dimensions	Mounting	Quantity	Inner box weight
	[mm]	[inch]	[pcs]	kg
RT-CHUCK/13	1,5 - 13	1/2"	1	3.50

RT-CHUCKADAPT ADAPTER SDS PLUS 1/2"

Adapter used for non-impact drilling with an SDS plus hammer drills



FEATURES AND BENEFITS

- The core fits most SDS Plus hammer drills available on the market
- The 1/2" thread allows use in the most popular drill grips on the market
- Comes with a counter screw providing good mounting for adapter with grip

APPLICATIONS

- Designed for non-impact drilling with an SDS plus hammer drills



Rawplug code	Diameter	Quantity	Inner box weight
	[mm]	[pcs]	kg
RT-CHUCKADAPT	13	1	1.00

RT-CHUCK-UNIVKEY KEY FOR CHUCKS

Key for tightening drill chucks



FEATURES AND BENEFITS

- Milled teeth allow tightening the drill chuck with a diameter of 13 mm
- Long core improves comfort of screwdriving
- Good quality steel provides high abrasion resistance and prevents tilting

APPLICATIONS

- For key-tightening drill chucks



Rawplug code	Diameter	Quantity	Inner box weight
	[mm]	[pcs]	kg
RT-CHUCK-UNIVKEY	13	1	1.00

RT-CHUCKSET/1 SET OF CHUCK AND ADAPTER SDS PLUS

Drill chuck and adapter used for non-impact drilling with an SDS Plus hammer drill



FEATURES AND BENEFITS

- Maximum jaw spacing of 13mm allows use with most cylindrical and relief drills
- The core fits most SDS Plus hammer drills available on the market
- Comes with a 13 mm key and a counter screw providing good fastening of the adapter

APPLICATIONS

- Drill chuck and adapter used for non-impact drilling with an SDS plus hammer drills



Rawplug code	Diameter	Quantity	Inner box weight
	[mm]	[pcs]	kg
RT-CHUCKSET/1	13	1	0.40

CUTTING ACCESSORIES

RECIPROCATING SAW BLADES
FOR CUTTING BEAMS, WOODEN
PANELS AND ALL WOOD-BASED
MATERIALS

**JIGSAW BLADES FOR
STRAIGHT AND PRECISE
CUTTING OF WOOD AND
WOOD-BASED MATERIALS**

The universal
mounting system
allows for work with
the most popular
reciprocating saws
available on the
market

A T-type grip allows working
with the majority of jigsaws
available on the market

Inverted teeth allow
clean cutting of kitchen
countertops and furniture
panels, without chipping

Milled and alternately
placed teeth adapted for
clean cutting of wood and
wood-based materials

High-quality carbon
steel HCS with
specification SK5 is ideal
for use in cutting tools,
which increases their
lifespan

High-quality carbon steel
HCS with specification
SK5 is ideal for use in
cutting tools, which
increases their lifespan

Milled and conical teeth
allows for fast cutting
of even thick wood

Special shape of teeth
allows to cut wet wood,
branches and firewood

The blade length
of 240 mm allows cutting
thick materials

RT-JSB-W JIGSAW BLADES FOR WOOD CUTTING

Jigsaw blades for straight and fast cutting of wood and wood-based materials




FEATURES AND BENEFITS

- A T-type grip allows working with the majority of jigsaws available on the market
- High-quality carbon steel HCS with specification SK5 is ideal for use in cutting tools, which increases their lifespan
- Milled and conical teeth designed for fast cutting of wood and wood-based materials

APPLICATIONS

- Straight and fast cutting of wood and wood-based materials



Rawplug code	Length	Working length	Quantity	Tooth spacing	Cutting	Inner box weight
	mm	mm	pcs	mm		kg
RT-JSB-W4C	100	75	5	4	10-50	0.05
RT-JSB-W2M	100	75	5	2.5	3-30	0.05
RT-JSB-W4U	100	75	5	4	4-50	0.04
RT-JSB-W3RC	100	75	5	3	4-50	0.05
RT-JSB-W2VF	77	50	5	2	2-15	0.03

RT-JSB-W2F JIGSAW BLADES FOR WOOD CUTTING

Jigsaw blades for precise and clean cutting of wood and wood-based materials



FEATURES AND BENEFITS

- A T-type grip allows working with the majority of jigsaws available on the market
- High-quality carbon steel HCS with specification SK5 is ideal for use in cutting tools, which increases their lifespan
- Milled and alternately placed teeth adapted for clean cutting of wood and wood-based materials
- The narrow width of the blade allows for cutting along curves
- The perpendicular arrangement of the teeth enables clean cutting of wood without fray

APPLICATIONS

- Precise and clean curved cutting of wood and wood-based materials



Rawplug code	Length	Working length	Quantity	Tooth spacing	Cutting	Inner box weight
	mm	mm	pcs	mm		kg
RT-JSB-W2F	77	50	5	1.4	3-20	0.03

RT-JSB-W2MR JIGSAW BLADES FOR FURNITURE PANELS CUTTING

Jigsaw blades with inverted teeth for straight and clean cutting of kitchen countertops and furniture panels



FEATURES AND BENEFITS

- A T-type grip allows working with the majority of jigsaws available on the market
- Inverted teeth allow clean cutting of kitchen countertops and furniture panels, without chipping
- High-quality carbon steel HCS with specification SK5 is ideal for use in cutting tools, which increases their lifespan
- Milled and alternately placed teeth adapted for clean cutting of wood and wood-based materials

APPLICATIONS

- Straight and clean cutting of kitchen countertops and furniture panels




RT-JSB-W2MR JIGSAW BLADES FOR FURNITURE PANELS CUTTING (cont.)

Rawplug code	Length	Working length	Quantity	Tooth spacing	Cutting	Inner box weight
	mm	mm	[cs]	mm		kg
RT-JSB-W2MR	100	75	5	2.5	3-30	0.04

RT-JSB-MW1AS JIGSAW BLADES SET

A set of jigsaw blades designed for cutting wood, wood-based materials, ferrous and non-ferrous metals

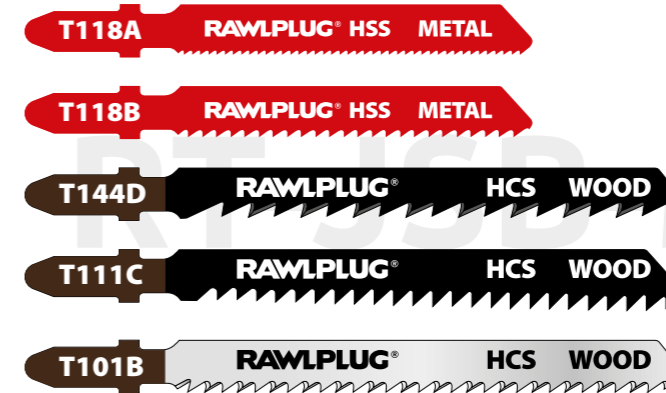

FEATURES AND BENEFITS

- A T-type grip allows working with the majority of jigsaws available on the market
- Specially hardened high speed steel HSS is ideally suited for cutting metal, aluminum and non-ferrous metals
- Milled and corrugated teeth are ideal for straight cutting of metal
- High-quality carbon steel HCS with specification SK5 is ideal for use in cutting tools, which increases their lifespan
- Milled and conical teeth designed for fast cutting of wood and wood-based materials

APPLICATIONS

- A set of blades designed for cutting wood, wood-based materials, ferrous and non-ferrous metals



Rawplug code	Carton quantity	Inner box weight
	pcs	kg
RT-JSB-MW1AS	5	0.04

RT-JSB-M JIGSAW BLADES FOR METAL CUTTING

Jigsaw blades for easy cutting of sheet metal, ferrous and non-ferrous metals



FEATURES AND BENEFITS

- A T-type grip allows working with the majority of jigsaws available on the market
- Specially hardened high speed steel HSS is ideally suited for cutting metal, aluminum and non-ferrous metals
- Milled and corrugated teeth are ideal for straight cutting of metal

APPLICATIONS

- For easy cutting of sheet metal, ferrous and non-ferrous metals



Rawplug code	Length	Working length	Quantity	Tooth spacing	Cutting	Inner box weight
	mm	mm	pcs	mm		kg
RT-JSB-M07VF	77	50	5	0.8	0.7-2.0	0.04
RT-JSB-M12F	77	50	5	1.2	1.5-3.0	0.04
RT-JSB-M2M	77	50	5	2.0	>2.5	0.04

RT-JSB-B112 JIGSAW BLADE FOR CLEAN AND FINISHING WOOD CUTTING

Jigsaw blade for straight, clean and finishing cutting of wood and wood-based materials



FEATURES AND BENEFITS

- A T-type grip allows working with the majority of jigsaws available on the market
- High-quality carbon steel HCS with specification SK5 is ideal for use in cutting tools, which increases their lifespan
- Milled and alternately placed teeth adapted for clean cutting of wood and wood-based materials
- High ridge of blades allows straight and finishing cutting of wood in hard to reach areas

APPLICATIONS


- Straight, clean and finishing cutting of wood and wood-based materials



Rawplug code	Length [mm]	Working length [mm]	Quantity [pcs]	Tooth spacing [mm]	Cutting	Weight kg
RT-JSB-B112	110	80	1	2.3	10-50	0.08

RT-JSB-W RECIPROCATING SAW BLADES

Reciprocating saw blades for cutting beams, planks, wooden panels and all wood-based materials

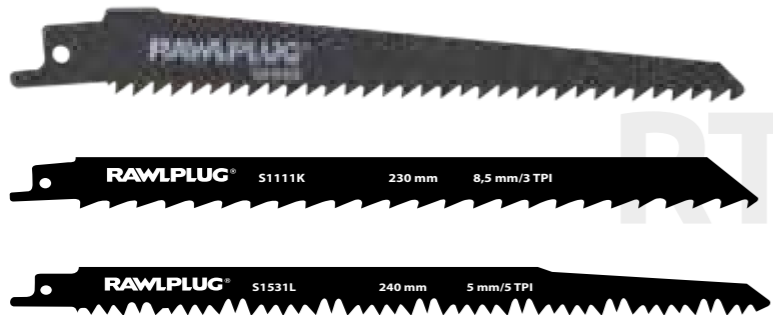

FEATURES AND BENEFITS

- High-quality carbon steel HCS with specification SK5 is ideal for use in cutting tools, which increases their lifespan
- Milled and conical teeth allows for fast cutting of even thick wood
- The universal mounting system allows for work with the most popular reciprocating saws available on the market

APPLICATIONS

- For cutting beams, planks, wooden panels and all wood-based materials
- For cutting beams, planks and all wood-based materials
- For cutting wet wood, branches and firewood



Rawplug code	Length [mm]	Working length [mm]	Quantity [pcs]	Tooth spacing [mm]	Cutting	Weight kg
RT-JSB-W150M	152	132	5	4	6-100	0.11
RT-JSB-W225C	225	210	5	8.5	20-175	0.20
RT-JSB-W240P	240	220	5	5	20-175	0.20

RT-JSB-M150C RECIPROCATING SAW BLADES

Reciprocating saw blades for easy cutting of sheet metal, ferrous and non-ferrous metals



FEATURES AND BENEFITS

- Milled and corrugated teeth are ideal for straight cutting of metal
- The universal mounting system allows for work with the most popular reciprocating saws available on the market
- Bimetal blade allows cutting steel and non-ferrous metals

APPLICATIONS

- For easy cutting of sheet metal, ferrous and non-ferrous metals



Rawplug code	Length [mm]	Working length [mm]	Quantity [pcs]	Tooth spacing [mm]	Cutting	Weight kg
RT-JSB-M150C	150	130	5	2.5	5-10	0.11

RT-JSB-M150M RECIPROCATING SAW BLADES

Reciprocating saw blades for easy cutting of sheet metal, ferrous and non-ferrous metals



FEATURES AND BENEFITS

- Milled and corrugated teeth are ideal for straight cutting of metal
- The universal mounting system allows for work with the most popular reciprocating saws available on the market
- Bimetal blade allows cutting steel and non-ferrous metals

APPLICATIONS

- For easy cutting of sheet metal, ferrous and non-ferrous metals



Rawplug code	Length [mm]	Working length [mm]	Quantity [pcs]	Tooth spacing [mm]	Cutting	Weight kg
RT-JSB-M150M	150	130	5	1.8	3-8	0.11

RT-RSB-AB RECIPROCATING SAW BLADES FOR CUTTING AERATED CONCRETE

Reciprocating saw blades for cutting cellular concrete blocks, aerated concrete and airbricks



FEATURES AND BENEFITS

- HM carbide teeth and tooth spacing of 12.7 mm allows for the efficient cutting of porous concrete and bricks
- High ridge of blade allows straight cutting of materials
- The universal mounting system allows for work with the most popular reciprocating saws available on the market
- The length of the blade allows cutting most popular block sizes

APPLICATIONS

- For cutting cellular concrete blocks, aerated concrete and airbricks



Rawplug code	Length [mm]	Working length [mm]	Quantity [pcs]	Tooth spacing [mm]	Cutting	Weight kg
RT-RSB-AB305	305	255	1	12.7	250	0.10
RT-RSB-AB455	455	405	1	12.7	400	0.12



” Direct and Manual Fastening Systems

Overview of direct fastening solutions	98
SC40 Gas solution for concrete and steel	100
WW90 Gas solution for wood	110
Joist nailer for wood	112
Second fix nailers for wood	112
Pneumatic actuated tools	120
Paper strip nailers	121
Coil nailers	122
Staplers and staples	128
Gluing system	136

RAWLPLUG®

100 YEARS OF EXPERTISE IN FIXINGS, FASTENERS AND TOOLS


DIRECT FASTENING SYSTEMS

SAVE TIME AND MINIMISE COSTS


METAL

GAS ACTUATED TOOLS

R-RAWL-SC40II
STEEL AND CONCRETE NAILER




INSTALLATION GUIDE

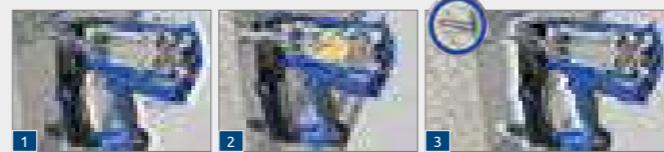

APPLICATIONS



CONSUMABLES

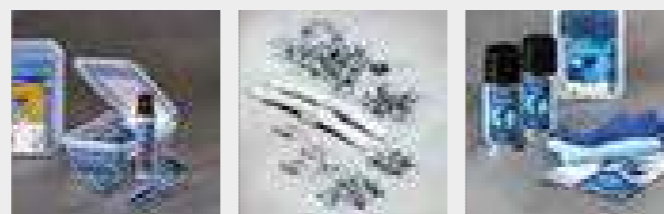

NAILS WITH FUEL CELLS FOR CONCRETE AND STEEL

CLIPS PLASTIC AND METAL

CLEANING KIT


WOOD

GAS ACTUATED TOOLS

R-WW90II
WOOD FRAMING NAILER



INSTALLATION GUIDE

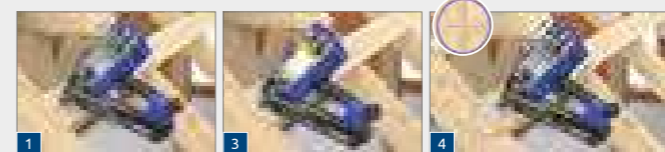

APPLICATIONS



CONSUMABLES



NAILS FOR WOOD

FUEL CELL

CLEANING KIT

WOOD

PNEUMATIC TOOLS

PAPER STRIP NAILERS & COIL NAILERS




PAPER STRIP NAILER

COIL NAILER



APPLICATIONS

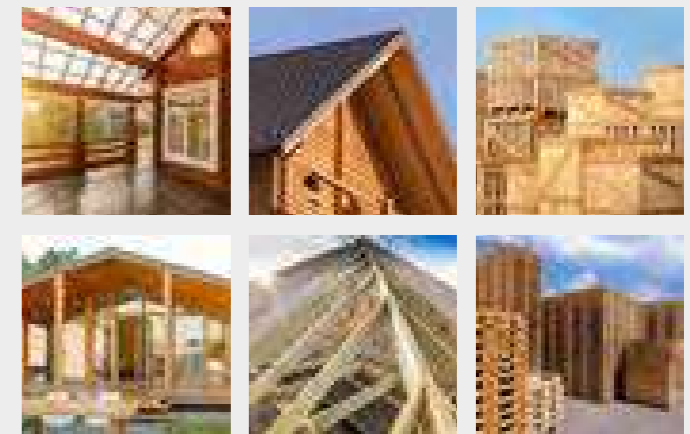

CONSUMABLES



COLLATED NAILS R-GDP WIRE / R-GPG PLASTIC

OIL LUBRICATED COMPRESSORS



Use the e-learning training or sign up for our hands-on training.

▪ SC40II Gas nailer for concrete and steel - advanced characteristic

www.rawlplug.com

SC40II GAS POWERED NAILER

FOR STEEL AND CONCRETE

New cleaning and maintenance mechanism extends nailer lifespan by **40%**

Lithium-ion battery up to **8000 fixings per charge**

Fast charging **2 minutes +200 fixings**

Improved distribution mas, **limits forearm overload** and provides work comfort



One of the **lowest weights** in the market

Stand-by mode after **10 minutes** of inactivity **saves battery power**

Tool-free comfort depth adjustment nail seating in 2 modes ensures **quick use**

Dedicated barrel's **magnet holder** positions and keeps steel washers and clips during installation

ACCESSORIES SELECTION GUIDE

STEP 1 DETERMINE THE SUBSTRATE

min 3 mm
min 80 mm

STEP 3 CONFIRM FIXTURE'S THICKNESS


max 10 mm
max 20 mm

STEP 2 CHOOSE THE FIXTURE


tfix + 9mm < KSC
tfix + 17mm < KNC

COLLATED NAILS

R-KSC [15MM-19MM] R-KNC [19MM-38MM]



CLEANING KIT R-KIT-WW90/SC40

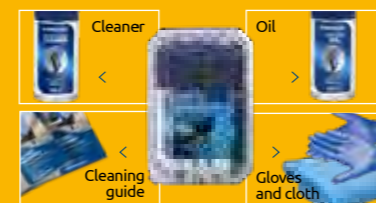

R-RAWL-SC40II GAS POWERED STEEL AND CONCRETE NAILER

NEW

Gas powered nailer for steel and concrete



FEATURES AND BENEFITS

- Pin range from 15mm to 38mm provides wide range of application
- Simplified depth adjustment design provides the end user with easy but accurate depth of drive control.
- Removable magnetic nose tip for attaching metal clips and ceiling hangers. User can safely and comfortably perform in all overhead applications
- Compact and ergonomic design allows the operator to achieve great accessibility and freedom of operation
- Rear loading lightweight plastic magazine with a capacity of 30 pins provides durability and accessibility
- Sequential firing mode for operators safety and fixing precision
- Low weight provides end user with high level of comfort and working experience.
- Quick release mechanism provides easy access to the magazine for removing obstructions and performing routine maintenance
- Lithium-Ion technology along with energy saving features ensures high capacity and performance of the system

EQUIPMENT

- R-RAWL-SC40II Gas powered nailer and case
- 1 battery
- AC power supply cable
- Charger base
- Operating and Safety manual
- Safety glasses and ear plugs

BASE MATERIALS

- Concrete C20/25-C50/60
- Concrete Slab
- Unreinforced concrete
- Concrete
- Structural Steel



APPLICATIONS

- Cable conduits and wires installation
- Applicable for fixing steel and aluminium profiles in drywall structures
- Installation of all types of M&E clips and clamps
- Securing wire mesh as plaster reinforcement using special thrust washer

CORRESPONDING PRODUCTS

- R-KNC plastic collated pins for concrete with fuel cells
- R-KSC plastic collated pins for steel with fuel cells
- R-RAWL-GP5
- R-KIT-WW90/SC40

CERTIFICATE



Rawplug code	Fastener length range [mm]	Fastener type	Dimensions	Fuel cell type	Weight	Magazine capacity [nail]	Battery charge [h]	Shots per charge	Noise level	Box Weight [kg]	Outer Weight [kg]
			[mm]		[kg]				[dB]		
R-RAWL-SC40 II	15 - 38	Round head pin	395x355x120	GP5	3.5	30	0.5	up to 8000	92	9.00	18.00

R-SC40-MH / R-SC40-MHC MAGNET HOLDER FOR SC40 GAS NAILER

NEW

Magnet holder for the barrel of the R-RAWL-SC40II nailer



R-S1-SC40-MH-25/2



R-S1-SC40-MHC-25/2

FEATURES AND BENEFITS

- Allows for magnetic holding of steel elements before and during serial installation, which makes assembly on scaffoldings or with difficult access to the ground simple and comfortable
- Perfectly suited to the barrel of the SC40II nailer
- Simple installation by placing the ring on the barrel

APPLICATIONS

- Serial assembly of steel holders - MH
- Serial assembly of steel mesh using a nail with a steel washer - MHC



R-SC40-MH



R-SC40-MHC

Rawplug code	Diameter	Internal diameter	Carton quantity
	[mm]	[mm]	[pcs]
R-S1-SC40-MH-25/2	23	12	1
R-S1-SC40-MHC-25/2	23	12	1

R-KIT-WW90/SC40

Cleaning kit for gas powered tools



FEATURES AND BENEFITS

- Contains cleaning detergent, lubricating oil, cloth, gloves and cleaning guide for gas tools
- Allows to perform a standard cleaning and maintenance of the tool
- Provide send user with means to keep the tools in perfect working conditions
- The kit is not included with the tool

CORRESPONDING PRODUCTS

- All gas powered framing nailer



R-RAWL-SC40II
CLEANING GUIDE



Rawplug code	Content	Quantity [pcs]
R-KIT-WW90/SC40	Cleaning detergent, Lubricating oil, Cleaning cloth, Gloves, Cleaning guide	1

R-SC40-PCR PIPE AND CABLE PLASTIC CLIP

Single plastic clip for M&E applications

NEW



FEATURES AND BENEFITS


- The clip allows to use it in multiple applications thanks to adjustable diameter
- Equipped with countersink cavity allowing to place it firmly onto the nose piece of the tool and perform one hand over head installation
- Possibility to use the clip for hot water pipes thanks to special groove in the clip base and an installation railing
- Suitable for installing metric, copper, steel, multilayer, PE, PP, PB and stainless pipes
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment

APPLICATIONS

- Fixing pipes and cables in HVAC systems
- Installing cables in pipes and corrugated conduits
- Installation of metal and plastic pipes in all pipework installations

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Steel



CORRESPONDING PRODUCTS


- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel



Rawplug code	Bag quantity [pcs]	Description	Diameter range	Dimensions	Operating temperatures	Box Weight	Outer Weight
			[mm]	[mm]	[°C]	[kg]	[kg]
R-SC40-PCR-18	60	Adjustable pipe and cable clip	18	20x24x35,6	-10 - +90	0.69	24.17
R-SC40-PCR-25	40	Adjustable pipe and cable clip	25	20X29X45,5	-10 - +90	0.49	7.33
R-SC40-PCR-32	25	Adjustable pipe and cable clip	32	20x36x53,6	-10 - +90	0.60	21.11
R-SC40-PCR-42	20	Adjustable pipe and cable clip	42	24x45x66,4	-10 - +90	0.46	6.85

CONSUMABLES FOR GAS ACTUATED TOOLS

NYLON AND METAL CLIPS, WASHERS

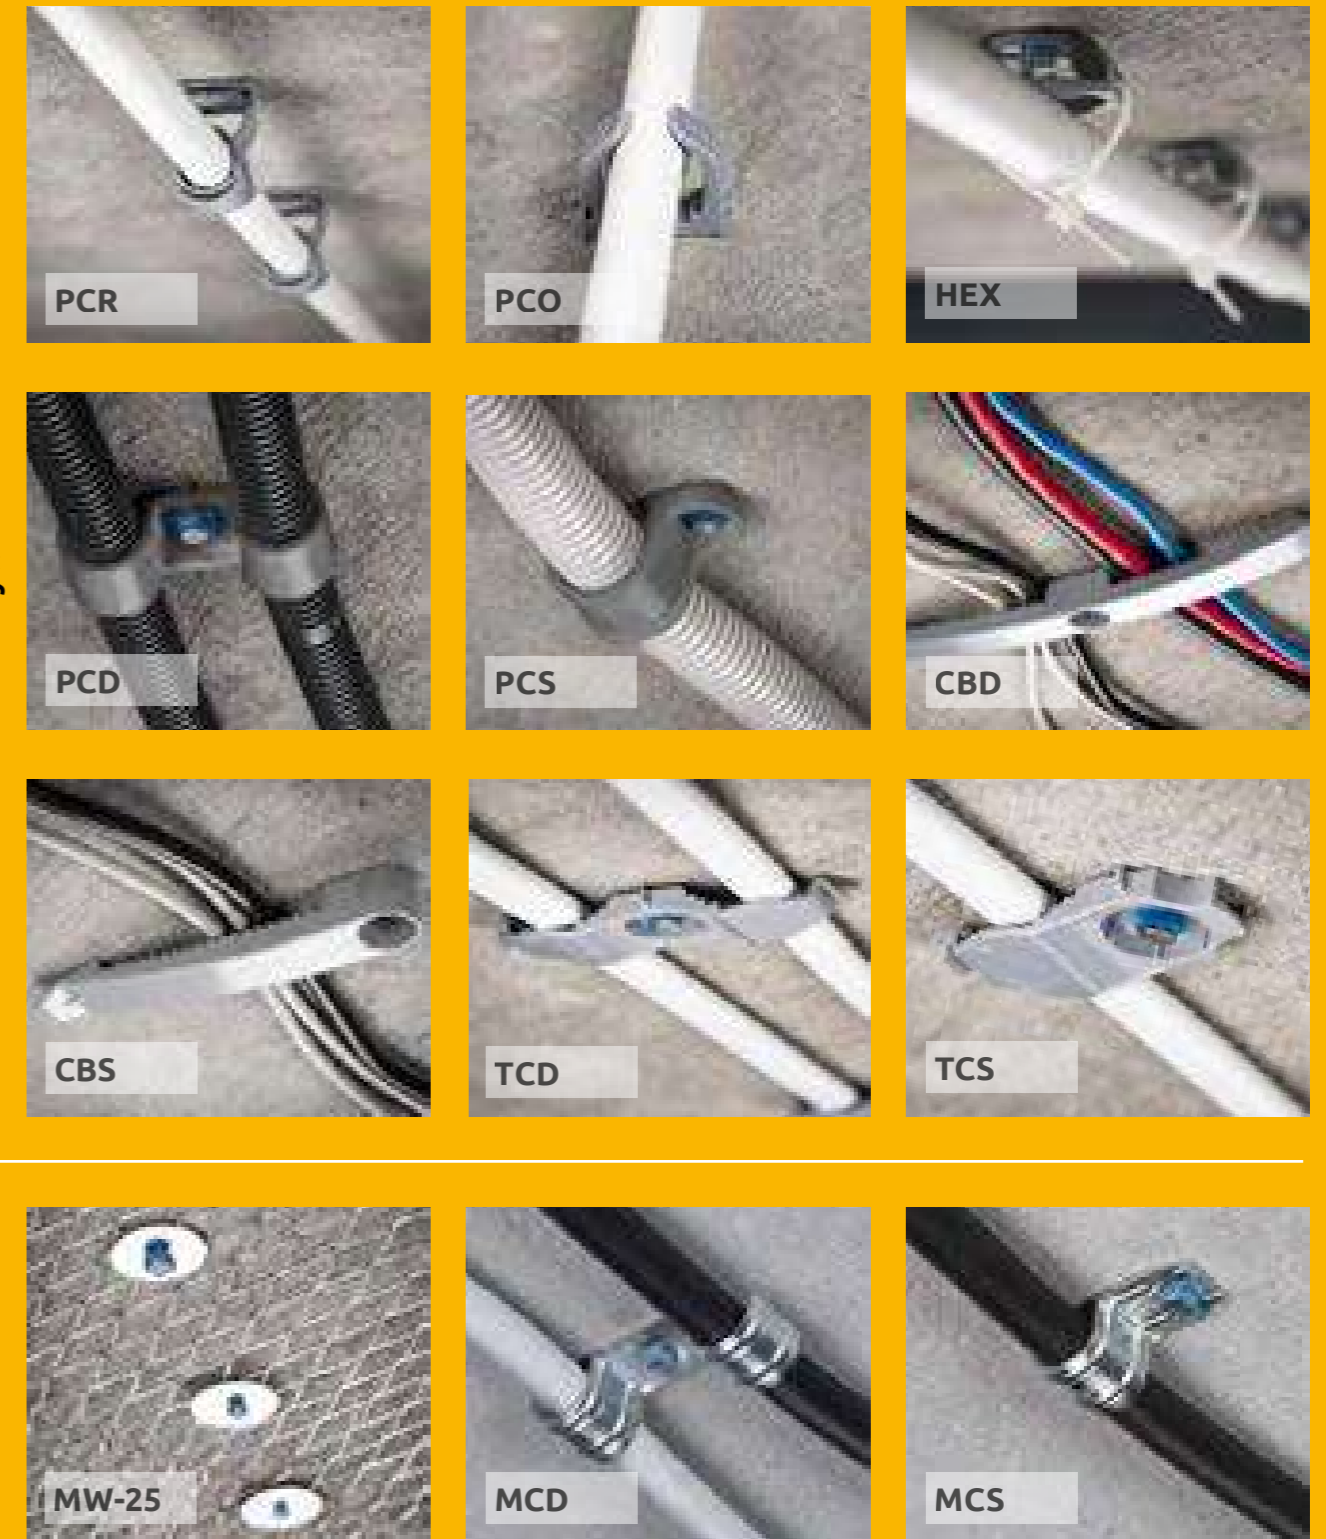

nylon

metal

R-SC40-PCO PIPE AND CABLE PLASTIC CLIP

NEW

Plastic brackets for pipes and conduits for applications in electrical installations, water and sewage systems, and HVAC



FEATURES AND BENEFITS

- Easy to install with the possibility of setting on the nail gun barrel, and one-hand assembly
- Possibility of joining grips in larger sections with special locks on the sides of the handle
- Can be used in heating systems using installation rail
- Special socket design ensures compatibility with most nail guns available on the market
- The range of the offer provides the ability to handle most plumbing applications
- The hole in the base allows mounting the bracket using the traditional method

APPLICATIONS

- Installing cables in pipes and corrugated conduits
- Fixing pipes and cables in HVAC systems
- Pipe installation in plumbing


BASE MATERIALS

- Concrete C20/25-C50/60
- Unreinforced concrete
- Concrete block
- Steel



CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel

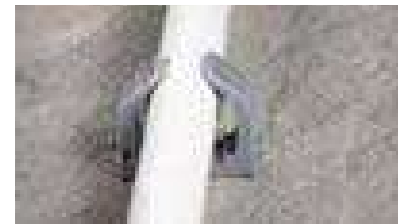


Rawplug code	Bag quantity [pcs]	Description	Diameter range	Dimensions	Operating temperatures [°C]	Box Weight [kg]	Outer Weight [kg]
			[mm]	[mm]			
R-SC40-PCO16	100	Adjustable pipe and cable clip	16	10x23x23,5	-10 - + 90	0.40	5.93
R-SC40-PCO-20	100	Adjustable pipe and cable clip	20	10x25x29,5	-10 - + 90	0.00	0.06
R-SC40-PCO-25	90	Adjustable pipe and cable clip	25	10x30x34	-10 - + 90	0.55	8.31
R-SC40-PCO-32	50	Adjustable pipe and cable clip	32	10x38x42	-10 - + 90	0.41	6.12
R-SC40-PCO-40	35	Adjustable pipe and cable clip	40	10x46x50	-10 - + 90	0.49	7.39

R-SC40-PC NYLON CLIPS DOUBLE AND SINGLE

NEW

Double and simple plastic clip for M&E applications

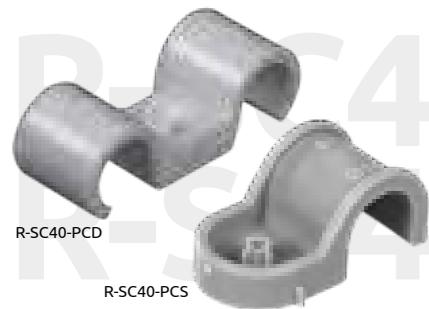

FEATURES AND BENEFITS

- Designed to be used for fixing installation pipes ex. underfloor heating
- Applicable for electrical installations on technical floors, walls and ceilings
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment
- Thanks to its special design, it provides secure fixing of installed parts
- Special slot for tools nose peice provides good positioning and precision of fixing

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Steel





APPLICATIONS

- Pipework installation
- Underfloor heating installation

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel

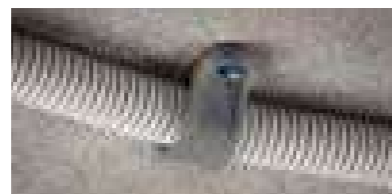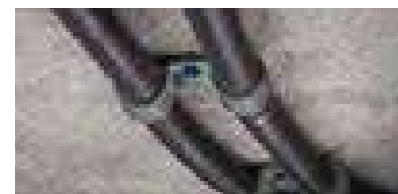

Rawplug code	Internal diameter	Carton quantity [pcs]	Box Weight [kg]	Outer Weight [kg]
	[mm]			
R-SC40-PCD Plastic clip - double				
R-SC40-PCD -16	16	60	0.52	5.20
R-SC40-PCD -20	20	50	0.18	2.80
R-SC40-PCD -25	25	30	0.25	2.45

R-SC40-PC NYLON CLIPS DOUBLE AND SINGLE (cont.)

Rawplug code	Internal diameter	Carton quantity [pcs]	Box Weight [kg]	Outer Weight [kg]
	[mm]			
R-SC40-PCS Plastic clip - single				
R-SC40-PCS-16	16	100	0.23	3.60
R-SC40-PCS-18	18	80	0.47	7.52
R-SC40-PCS-20	20	80	0.50	8.00
R-SC40-PCS-22	22	70	0.55	8.80
R-SC40-PCS-25	25	60	0.58	5.80
R-SC40-PCS-28	28	50	0.08	0.75
R-SC40-PCS-32	32	50	0.17	2.64

R-SC40-CB NYLON CABLE BOW DOUBLE AND SINGLE

NEW

Double and single plastic cable bow for wiring and electrical installations



FEATURES AND BENEFITS

- Thanks to special design it is possible to expand or reduce the number of cables without dismantling the clip
- Precise fixing thanks to pre-moulded markers on the base of the clasp
- Product compatible with most of the gas tools available on the market which allows matching accessories with your equipment
- Applicable for electrical installations on technical floors, walls and ceilings
- Equipped with a special socket for tools nose piece for one-hand operation overhead

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Steel



APPLICATIONS

- Installation of cables in industrial and commercial applications, where frequent rerouting is expected

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel



Rawplug code	Carton quantity [pcs]	Width [mm]	Box Weight [kg]	Outer Weight [kg]
R-SC40-CBD Double plastic clip				
R-SC40-CBD	20	76.5	0.13	1.25
R-SC40-CBS Single plastic clip				
R-SC40-CBS	40	76.5	0.50	5.00

R-SC40-TC NYLON CLIP FOR TWIN AND EARTH CABLE

NEW

Plastic clip for installing twin and earth cable



FEATURES AND BENEFITS

- Equipped with countersink cavity allowing to place it firmly onto the nose piece of the tool and perform one hand over head installation
- Manufactured in accordance to RoHS from halogene free PA6
- Applicable for electrical installations on technical floors, walls and ceilings
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment
- Quick assembly with the use of gas nailer is an cost effective alternative to all other installation methods

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Steel



APPLICATIONS

- Installation of twin and earth flat cables of width up to 25.5mm using a SC40 gas nailer

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel



R-SC40-TC NYLON CLIP FOR TWIN AND EARTH CABLE (cont.)

Rawplug code	Carton quantity	Width	Box Weight	Outer Weight
	[pcs]	[mm]	[kg]	[kg]
R-SC40-TCD Plastic clip - double				
R-SC40-TCD	90	25.5	0.06	0.55
R-SC40-TCS Plastic clip - simple				
R-SC40-TCS	100	17.5	0.03	0.25

R-SC40-HEX PLASTIC UNIVERSAL CABLE/CONDUIT TIE HOLDER

Universal cable/conduit tie holder for electrical cables, flexible and rigid electrical conduits



FEATURES AND BENEFITS

- Designed for fixing cables and pipes using cable ties. Perfect in places with difficult access for drilling
- Can hold multiple cable ties in six surfaces
- Equipped with countersunk cavity allowing to place it firmly onto the nose piece of the tool and perform one hand over head installation
- Product compatible with majority of the gas powered tools available on the market, which allows to match accessories with your equipment

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Structural steel



CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel

APPLICATIONS

- Fixing single cables and bunched cables
- Installing cables in pipes and corrugated conduits
- Installation of metal and plastic pipes in all pipework installations
- Pipe installation in plumbing



Rawplug code	Bag quantity	Diameter range	Box Weight	Outer Weight
	[pcs]	[mm]	[kg]	[kg]
R-SC40-HEX	100	31	0,256	3,072

R-SC40-MC METAL CLIP DOUBLE AND SINGLE

Double and single metal clip for low voltage electric installations



FEATURES AND BENEFITS

- With its special design and issued certificates it is dedicated to fasten low-voltage installations, e.g. CCTV, alarm or fire protection systems
- Proven to provide full functionality of the fire resistant cable up to maximum required time(120 min)
- A minimum of 5 microns of zinc coating for better corrosion protection
- Equipped with plastic insert allowing to place it firmly in the nose piece of the tool and perform one hand over head installation
- Product compatible with most of the gas tools available on the market which allows matching accessories with your equipment

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Structural Steel




APPLICATIONS

- Fastening electric cables
- Fastening flexible and rigid wiring pipes
- Fastening plumbing and heating pipes
- Attachment of injection hoses

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel
- R-SC40-MH magnet holder

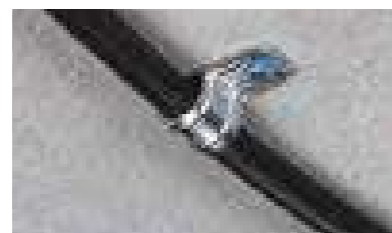

R-SC40-MC METAL CLIP DOUBLE AND SINGLE (cont.)

Rawplug code	Carton quantity	Internal diameter	Class fire reaction	Box Weight	Outer Weight
	[mm]	[mm]	[min]	[kg]	[kg]
R-DFT Metal clip - double					
R-SC40-MCD-6	100	6	90	0.90	7.36
R-SC40-MCD-8	100	8	90	0.92	7.02
R-SC40-MCD-10	100	10	90	0.50	7.95
R-PFT Metal clip - simple					
R-SC40-MCS-6	50	6	90	0.16	0.80
R-SC40-MCS-8	50	8	90	0.16	0.48
R-SC40-MCS-10	50	10	90	0.20	3.20
R-SC40-MCS-12	100	12	90	0.90	14.40

R-SC40-MW-25 METAL WASHER

Steel washer for mounting the concealed steel mesh



FEATURES AND BENEFITS

- Compatible with the magnetic holder of the barrel for the R-RAWL-SC40II nailer
- A zinc coating with a minimum thickness of 5 microns provides optimal protection against corrosion
- Compatible with most gas nailers on the market
- The large pressure surface ensures a wide range of applications and the best parameters

BASE MATERIALS

- Concrete
- Concrete block
- Steel




APPLICATIONS

- Installation of the metal concealed mesh

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- R-KNC nails for concrete and steel
- R-KSC nails for steel

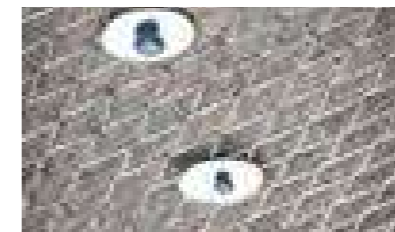

Rawplug code	Material	Carton quantity	Diameter	Thickness	Finish	Box Weight	Outer Weight
		[pcs]	[mm]	[mm]		[kg]	[kg]
R-SC40-MW-25	Steel	200	25	0.8	Silver Galvanised	0.45	7.20

R-MTC-10M / R-MTP-10M MOUNTING TAPE - PERFORATED

Perforated mounting tape for hanging and fastening cables, pipes, ducts or other large items



FEATURES AND BENEFITS

- Easy to cut, bend or twist, widely used for electricians, plumbers, HVAC fitters
- Easy to install thanks to evenly distributed holes
- Supplied on a 10m roll with possibility to customize to the required length
- Versatile fixing made of galvanized steel

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Structural Steel



APPLICATIONS

- Fastening pipes and cables on floors and ventilation ducts to ceilings



R-MTC-10M/R-MTP-10M MOUNTING TAPE - PERFORATED

Rawplug code	Carton quantity	Width	Box Weight	Outer Weight
	[pcs]	[mm]	[kg]	[kg]
R-MTC-10M Perforated mounting tape				
R-MTC-10M	1	12	0,484	4,84
R-MTP-10M Perforated mounting tape, coated in plastic cover				
R-MTP-10M	1	14	0,6	6

R-MTT-10M MOUNTING TAPE - TEXTILE

Textile tape for cable and conduit fastenings on floors



FEATURES AND BENEFITS

- Easy to cut with a wide range of applications for electricians and plumbers
- Quick, cost-efficient fastening
- Supplied on a 10m roll with possibility to customize to the required length

APPLICATIONS

- Fastening electrical conduits on floors
- Fastening pipes on floors in plumbing and heating installation work

BASE MATERIALS

- Concrete
- Concrete block
- Cracked concrete
- Structural Steel



NEW

Rawplug code	Carton quantity	Width	Box Weight	Outer Weight
	[pcs]	[mm]	[kg]	[kg]
R-MTT-10M	1	12	0,23	11,96

R-RAWL-GP5 FUEL CELL FOR USE WITH R-RAWL-SC40II

Fuel cell for use in R-RAWL-SC40II gas powered nailer



FEATURES AND BENEFITS

- Clean Propane & Butane mixture reduces carbon residue
- High quality propellant for increased performance
- Contains a fully synthetic oil for lubricating the tool
- Functions from -5°C to 35°C to elongate the work site capability of the system
- Compatible with leading manufactures tools

APPLICATIONS

- Powering gas powered steel and concrete nailers

Rawplug code	Fuel type	Lubrication	Size	Weight	Operating temperatures	Efficiency	Box Weight	Outer Weight
			[mm]	[g]	[°C]	[shots]	kg [kg]	[kg] kg
R-RAWL-GP5	Propane & Butane	Yes	55	30	-5 - 35	min. 500 shots	0.08	0.75

R-KNC PLASTIC COLLATED CONCRETE PINS WITH FUEL CELLS

Smooth shank galvanised pins for concrete applications and for lightweight steel applications



CERTIFICATE

- ITB-KOT-2019/1111



FEATURES AND BENEFITS

- Ballistic point increases performance into the base material. This special design is responsible for providing best load bearing values for this type of fixing.
- Smooth shank and hardness of 55 - 60 HRC provide great penetration ability and give best result in hard concrete - C20/25-C50/60
- Plastic collation provides protection from deterioration by weather conditions or high humidity
- Compatible with leading manufactures tools present on the marketplace
- Full round head for a secure fixing with the highest performance achieved

APPLICATIONS

- Fixing steel or aluminium profiles into concrete in drywall systems
- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Cable conduits and wires installation

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- plastic clips
- metal clips

BASE MATERIALS

- Concrete
 - Concrete block
 - Cracked concrete
- Also suitable for (after site testing):**
- Steel



Rawplug code	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Shank hardness [Hrc]	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight
	mm	mm						[pcs]	[pcs]	[pcs]	kg
R-KNC-6/17/500	2.7	17	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	0.67
R-KNC-6/19/500	2.7	19	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	0.67
R-KNC-6/22/500	2.7	22	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	0.75
R-KNC-6/25/500	2.7	25	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	0.83
R-KNC-6/27/500	2.7	27	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	0.86
R-KNC-6/32/500	2.7	32	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	0.97
R-KNC-6/38/500	2.7	38	Full Round	Smooth	Electro galvanised	Up to 4 microns	55 - 60	10	500	1	1.12

R-KSC PLASTIC COLLATED PINS FOR STEEL WITH FUEL CELLS

Smooth shank galvanised pins for steel applications



CERTIFICATE

- ITB-KOT-2019/1111



FEATURES AND BENEFITS

- The stepped shank nail tip increases performance in steel. This special design influences how well a nail is able to penetrate the substrate
- Stepped shank, hardness of 57 - 60 HRC and great ductility to bend provides nails to be driven successfully even in hard material
- Plastic collation provides protection from deterioration by weather conditions or high humidity
- Compatible with leading manufactures tools present on the marketplace
- Full round head for a secure fixing with the highest performance achieved

APPLICATIONS

- Fixing steel or aluminium profiles into concrete in drywall systems
- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Cable conduits and wires installation

CORRESPONDING PRODUCTS

- R-RAWL-SC40II Gas powered steel and concrete nailer
- plastic and metal clips

BASE MATERIALS

- Structural steel
- Also suitable for (after site testing):**
- Concrete
 - Concrete block
 - Cracked concrete



Rawplug code	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Shank hardness [Hrc]	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight
	mm	mm						[pcs]	[pcs]	[pcs]	kg
R-KSC-6/15/500	2.7	15	Full Round	step	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.58
R-KSC-6/17/500	2.7	17	Full Round	step	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.63
R-KSC-6/19/500	2.7	19	Full Round	step	Electro galvanised	Up to 4 microns	57 - 60	10	500	1	0.68

R-WW90II GAS POWERED FRAMING NAILER

Increased energy 104 J ensures best performance parameters in all base materials and applications

Lithium-ion battery. Up to 8000 fixings per charge - double the efficiency

Improved design and ergonomics less fatigue and great user experience

Modified tool design, easier cleaning and maintenance, with minimised failure rate

Keyless depth adjustment convenient, reliable and accurate fixing

Convenient rafter hook ensures high user comfort

Fast 2min charging+200 fixings

No mark nose protective cap. Protects wood surface against damage and minimises material loss



STEP 1 SELECT USE CONDITIONS

TYPE OF INSTALLATION APPLICATIONS

EXTERNAL USE
exposed to weather conditions

• arbours
• fences
• decking

INTERNAL USE
hidden from weather conditions

• roof construction (battens and sheathing)
• timber framing

STEP 1 SELECT PULL OUT FORCE



HIGH PULL OUT FORCE

RING SHANK


LOW PULL OUT FORCE

SMOOTH SHANK

GALVANIZED



BRIGHT



R-WW90II GAS POWERED FRAMING NAILER

NEW

High performance gas powered framing nailer for timber framing and roofing applications



FEATURES AND BENEFITS

- Nails range from 50mm to 90mm provides wide range of application
- Lithium technology alongside with energy saving features ensures high capacity and performance of the system
- Compact and ergonomic design allows the operator to achieve great accessibility and freedom of operation
- Low failure rate provides low running cost of the system
- Rear loading magazine with a capacity of 60 nails. Quick and simple to load thanks to one hand operation feeder spring. A safety clip at the rear prevents the nails from falling out and ensures safe reloading
- Retractable rafter hook ensures safe storage of the tool when not in use. Can also be hung from a tool belt for complete maneuverability
- Simplified depth adjustment design provides the end user with easy but accurate depth of drive control.
- Sequential firing mode for operators safety and fixing precision
- Removable no mark nose for protecting the timber surface. Especially important when securing timber cladding or façades
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing

BASE MATERIALS

- Timber
- Chipboard
- Plywood
- Wood



APPLICATIONS

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Manufacturing of timber standardised structure like Timber frame houses or roof elements
- Installation of soffits and other roof finishing elements
- Installation of wooden façades and other external trim
- Installation of timber flooring and terraces

SET INCLUDES

- R-WW90II gas powered nailer
 - 2.5 Ah 7.2 V Li-Ion battery
 - Power adapter
 - Charger (30 min)
 - Operation manual
 - Safety goggles and hearing protectors
- The package contains
- Cleaning set

CERTIFICATE



CORRESPONDING PRODUCTS

- R-RAWL-GP6
- R-DRG-V paper collated nails
- R-DPG-V paper collated nails
- R-DRK-V paper collated nails
- R-DPK-V paper collated nails
- R-KIT-WW90/SC40



Rawlplug code	Fastener length range	Fastener type	Substrate	Dimensions	Fuel cell type	Weight	Magazine capacity	Battery charge	Shots per charge	Noise level	Box Weight	Outer Weight
	[mm]			[mm]								
R-WW90II	50 - 90	Clipped head nail	Timber	394x121,4x407	R-RAWL-GP6	3.8	60	0.5	up to 8000	94	8.5	17



R-RAWL-GMC38 GAS POWERED JOIST HANGER NAILER

Efficient and durable gas powered metal connectors nailer



FEATURES AND BENEFITS

- Nail range from 35 to 60mm provides broad range of applications
- Sequential firing mode for operators safety and fixing precision
- Nose with probe mechanism tip locates in the pre-drilled hole for a precise and quick fixing. Easy to operate even in limited access areas
- Capable of accepting both paper and plastic collated nails for freedom of choice
- Rear loading magazine with a capacity of 60 nails. Quick and simple to load thanks to one hand operation feeder spring. A safety clip at the rear prevents the nails from falling out and ensures safe reloading

CORRESPONDING PRODUCTS

- R-RAWL-GP1
- R-HDGT paper collated nails
- R-KIT-WW90/SC40

CERTIFICATE



BASE MATERIALS

- Timber
- Oriented Strand Board
- Plywood
- Wood



APPLICATIONS

- Installation of all types of metal connectors
- Installation of truss supports and angled joints
- Installation of perforated steel tapes

SET INCLUDES

- R-RAWL-GMC38 Gas powered joist hanger nailer
- 2 batteries
- Charger base
- AC power supply cable
- Operating and Safety manual

Rawlplug code	Fastener type	Fuel cell type	Magazine capacity [nail]	Battery charge [h]	Shots per charge	Noise level [dB]	Weight [kg]	Dimensions [mm]	Fastener length range [mm]	Substrate	Box Weight [kg]	Outer Weight [kg]
R-RAWL-GMC38	34° paper laminated	GP1	30	2	4000	94	3.8	355x108x393	35 - 60	Timber	11.00	22.00

R-RAWL-A2064 GAS POWERED SECOND FIX NAILER

Gas powered angled brad nailer for all second fix applications



FEATURES AND BENEFITS

- 16 gauge Brad range from 32mm to 64mm for broad range of applications
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing
- Quick release mechanism for clearing obstructions and jams without the use of any tools. Allows also to perform simple maintenance
- Removable no mark nose for protecting the timber surface. Especially important in all second fix applications in which undamaged elements will be visible. A spare nose tip cover is stored on the back of the magazine
- LED display for monitoring battery status and preventing battery depletion

CORRESPONDING PRODUCTS

- BRADS20 angled brad nails
- R-RAWL-GP4-2BL
- R-KIT-WW90/SC40

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



APPLICATIONS

- Installation of wooden façades
- Installation of soffits and other roof finishing elements
- Installation of skirting, architraves and other internal trim
- Manufacturing of furniture, wooden packaging and timber trim

SET INCLUDES

- R-RAWL-A2064 gas powered brad nailer
- 2 batteries
- Charger base
- AC power supply cable
- Operating and Safety manual

Rawlplug code	Fastener length range [mm]	Fastener type	Substrate	Dimensions [mm]	Fuel cell type	Weight [kg]	Magazine capacity [nail]	Battery charge [h]	Shots per charge	Noise level [dB]	Box Weight [kg]	Outer Weight [kg]
R-RAWL-A2064	32 - 64	16 gauge angled brad	Timber	320x280x86	GP4	2.15	100	2	4500	92	5.06	10.12

R-RAWL-B1664 GAS POWERED SECOND FIX NAILER

Gas powered straight brad nailer for all second fix applications



FEATURES AND BENEFITS

- 16 gauge Brad range from 19mm to 64mm
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing
- Quick release mechanism for clearing obstructions and jams without the use of any tools. Allows also to perform simple maintenance
- Removable no mark nose for protecting the timber surface. Especially important in all second fix applications in which undamaged elements will be visible. A spare nose tip cover is stored on the back of the magazine
- LED display for monitoring battery status and preventing battery depletion

CORRESPONDING PRODUCTS

- Straight brad nails
- R-RAWL-GP4-2BL
- R-KIT-WW90/SC40

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



APPLICATIONS

- Installation of wooden façades
- Installation of soffits and other roof finishing elements
- Installation of skirting boards and architraves
- Manufacturing of furniture, wooden packaging and timber trim

SET INCLUDES

- R-RAWL-B1664 Straight brad nailer
- 2 batteries
- Charger base
- AC power supply cable
- Operating and Safety manual

Rawlplug code	Fastener length range [mm]	Fastener type	Substrate	Dimensions [mm]	Fuel cell type	Weight [kg]	Magazine capacity [nail]	Battery charge [h]	Shots per charge	Noise level [dB]	Box Weight [kg]	Outer Weight [kg]
R-RAWL-B1664	19 - 64	16 gauge straight brad	Timber	315x274x86	GP4	2.15	100	2	4500	92	5.06	10.12



FUEL CELLS, NAILS & BRADS

Synthetic oil content ensures trouble-free and long-lasting machine operation

Resistance of the gas to a wide temperature range from -5°C to 35°C allows you to extend the working season of installation works



Rawlplug's unique high-energy gas mix provides the highest single-shot energy, allowing you to nail in the 50-90mm range in the hard wood

Propane-butane of the **highest purity class** prevents the formation of dirt in the machine and prolongs trouble-free operation of the nailer

Waxed paper prevents the tape from soaking up and being damaged in difficult weather conditions



Precise nail connection is a guarantee of no jams and failures during operation

Special blue Rawlplug coating ensures easier nail insertion and greater pull-out strength

NEW

R-RAWL-GP6 FUEL CELL FOR USE IN R-WW90II

Fuell cell with green ring around valve for use with WW90II gas powered nailer



FEATURES AND BENEFITS

- Clean Propane & Butane mixture reduces carbon residue
- High quality propellant for increased performance
- Contains a fully synthetic oil for lubricating the tool
- Functions from -5°C to 35°C to elongate the work site capability of the system
- Compatible with leading manufactures tools

APPLICATIONS

- Powering gas powered timber framing nailers

CORRESPONDING PRODUCTS

- Gas powered framing nailer R-WW90II

Rawlplug code	Fuel type	Lubrication	Volume	Weight	Operating temperatures	Efficiency	Box weight	Outer weight
			[ml]	[kg]	[°C]	[shots]	[kg]	[kg]
R-RAWL-GP6	Propane & Butane	Sintetic Oil	165	40	-5 - 35	min. 1100	0.09	0.09

R-RAWL-GP4/SP-RAWL-GP1 FUEL CELL

Fuel cell x2 for use in R-RAWL-A2064 or R-RAWL-B1664 second fix nailers



FEATURES AND BENEFITS

- Clean Propane & Butane mixture reduces carbon residue
- High quality propellant for increased performance
- Contains a fully synthetic oil for lubricating the tool
- Functions from -5°C to 35°C to elongate the work site capability of the system
- Manufactured in accordance with European Regulations
- Compatible with leading manufactures tools

APPLICATIONS

- Powering gas powered second fix timber brad nailers


CORRESPONDING PRODUCTS

- R-RAWL-GP4 is recommended for:**
- R-RAWL-A2064 Gas powered second fix nailer
 - R-RAWL-B1664 Gas powered second fix nailer
- SP-RAWL-GP1 is recommended for:**
- R-RAWL-WW90CH

Rawlplug code	Fuel type	Lubrication	Volume	Weight	Operating temperatures	Efficiency	Box weight	Outer weight
			[ml]	[kg]	[°C]	[shots]	[kg]	[kg]
R-RAWL-GP4-2BL	Propane & Butane	Yes	30	20	-5 - 35	min. 1000 shots	0.30	1.50
SP-RAWL-GP1	Propane & Butane	Yes	165	40	-5 - 35	min. 1100	0.09	0.09

RING SHANK PAPER COLLATED NAILS WITH FUEL CELLS

Ring shank nails for timber framing, roofing and other timber applications

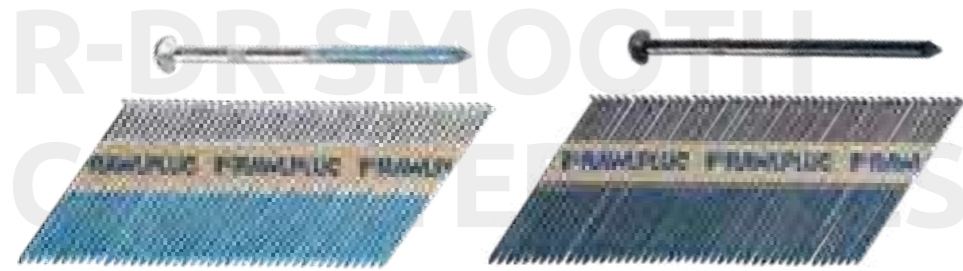

FEATURES AND BENEFITS

- A wide variety of combinations of nail coatings and finishes allows everyone to find the right solution for a particular application
- Full head design increases pull-through capacity
- 34° angle collation ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Minimum of 10 microns zinc coating provides great corrosion protection
- Packed with green ring valve for R-WW90II

APPLICATIONS

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden façades
- Installation of timber flooring and terraces
- Manufacturing of timber standardised structure like timber frame houses or roof elements

CORRESPONDING PRODUCTS

- Gas powered framing nailer R-WW90II

BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



CERTIFICATE




Rawplug code		Fastener diameter [mm]	Length [mm]	Shank type	Finish	Protection microns	Fasteners per strip	Carton quantity [pcs]	Suitable for use with	Fuel cells per carton		Box weight [kg]
Clipped head	Full head									Gas [pcs]	Quantity per carton [pcs]	
R-DRG-V Ring collated nails with fuel and two type of valves in box - galvanised												
R-DRG-2851-V	R-FRG-2851*	2.8	51	Ring	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	9.13
R-DRG-2863-V	R-FRG-2863*	2.8	63	Ring	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	11.14
R-DRG-2870-V	R-FRG-2870*	2.8	70	Ring	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	12.12
R-DRG-2875-V	R-FRG-2875*	2.8	75	Ring	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	12.88
R-DRG-3163-V	R-FRG-3163*	3.1	63	Ring	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	8.99
R-DRG-3175-V	R-FRG-3175*	3.1	75	Ring	Silver Galvanised	Minimum 10µm	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	10.42
R-DRG-3190-V	R-FRG-3190*	3.1	90	Ring	Silver Galvanised	Minimum 10µm	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	12.71
R-DRK-V Ring collated nails with fuel and two type of valves in box - bright												
R-DRK-2851-V	R-FRK-2851*	2.8	51	Ring	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	9.26
R-DRK-2863-V	R-FRK-2863*	2.8	63	Ring	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	11.15
R-DRK-2870-V	R-FRK-2870*	2.8	70	Ring	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	12.09
R-DRK-2875-V	R-FRK-2875*	2.8	70	Ring	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	12.98
R-DRK-3163-V	R-FRK-3163*	3.1	63	Ring	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	13.34
R-DRK-3175-V	R-FRK-3175*	3.1	75	Ring	Bright	-	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	10.33
R-DRK-3190-V	R-FRK-3190*	3.1	90	Ring	Bright	-	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	12.27

* Suitable for use with R-WW90II only.

SMOOTH SHANK PAPER COLLATED NAILS WITH FUEL CELLS

Smooth shank nails for timber framing, roofing and other timber applications

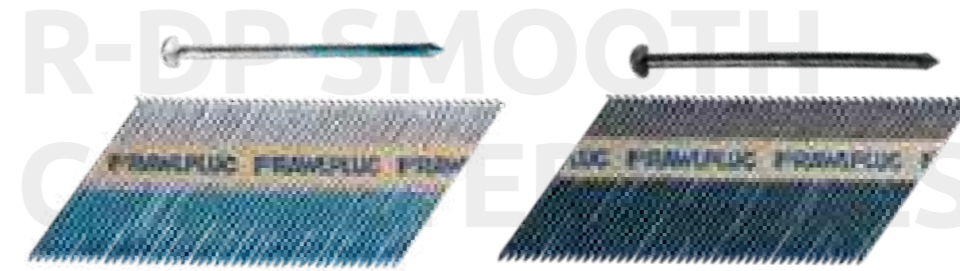

FEATURES AND BENEFITS

- A wide variety of combinations of nail coatings and finishes allows everyone to find the right solution for application
- Full head design increases pull-through capacity
- 34° angle collation ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Packed with green ring valve for R-WW90II

APPLICATIONS

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden façades
- Installation of timber flooring and terraces
- Manufacturing of timber standardised structure like Timber frame houses or roof elements

CORRESPONDING PRODUCTS

- Gas powered framing nailer R-WW90II

BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



CERTIFICATE



Rawplug code		Fastener diameter [mm]	Length [mm]	Shank type	Finish	Protection microns	Fasteners per strip	Carton quantity [pcs]	Suitable for use with	Fuel cells per carton		Box weight [kg]
Clipped head	Full head									Gas [pcs]	Quantity per carton [pcs]	
R-DPG-V Smooth collated nails with fuel and two type of valves in box - galvanised												
R-DPG-2863-V	R-FPG-2863*	2.8	63	Smooth	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	11.58
R-DPG-3163-V	R-FPG-3163*	3.1	63	Smooth	Silver Galvanised	Minimum 10µm	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	13.38
R-DPG-3175-V	R-FPG-3175*	3.1	75	Smooth	Silver Galvanised	Minimum 10µm	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	10.61
R-DPG-3190-V	R-FPG-3190*	3.1	90	Smooth	Silver Galvanised	Minimum 10µm	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	12.35
R-DPK-V Smooth collated nails with fuel and two type of valves in box - bright												
R-DPK-2851-V	R-FPK-2851*	2.8	51	Smooth	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	9.56
R-DPK-2863-V	R-FPK-2863*	2.8	63	Smooth	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	11.47
R-DPK-2870-V	R-FPK-2870*	2.8	70	Smooth	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	12.48
R-DPK-2875-V	R-FPK-2875*	2.8	75	Smooth	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	13.20
R-DPK-3163-V	R-FPK-3163*	3.1	63	Smooth	Bright	-	44	3300	R-WW90II/R-RAWL-90CH	GP6	3	13.25
R-DPK-3175-V	R-FPK-3175*	3.1	75	Smooth	Bright	-	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	10.34
R-DPK-3190-V	R-FPK-3190*	3.1	90	Smooth	Bright	-	44	2200	R-WW90II/R-RAWL-90CH	GP6	2	12.38

* Suitable for use with R-WW90II only.

R-HDGT-3838 PAPER COLLATED JOIST HANGER NAILS

Twist shank galvanised nails for metal connector applications



CERTIFICATE ✓



FEATURES AND BENEFITS ✓

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Diamond point prevents the timber from splitting
- Twisted shank eases driving the nail into timber and provides better performance
- Full round head provides a secure fixing and high pull through value
- Tapered shank at the nail head provides tight fitting of the metal connector

APPLICATIONS ✓

- Fixing all types of metal wood connectors

CORRESPONDING PRODUCTS ✓

- R-RAWL-GMC38 Gas powered joist hanger nailer

BASE MATERIALS ✓


- Timber
- Plywood
- Wood
- Chipboard



Rawlplug code	Fastener diameter	Length	Head type	Head diameter	Shank type	Finish	Collation	Carton quantity	Pallet quantity	Box Weight	Outer Weight
	[mm]	[mm]		[mm]				[pcs]		[kg]	[kg]
R-HDGT-3838	3.8	38	Full Round	8.5	Twist	Hot Dip Galvanised	Paper collated	2200	50	3.44	3.44

STRAIGHT BRAD NAILS

16 gauge straight brad nails for all second fix applications

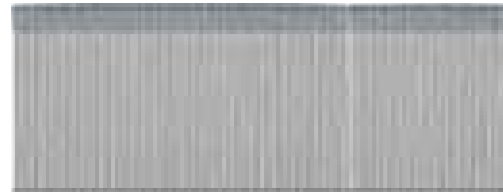

STRAIGHT BRAD NAILS

FEATURES AND BENEFITS ✓

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

APPLICATIONS ✓

- Installation of wooden façades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on façades and other timber structures

CORRESPONDING PRODUCTS ✓

- Gas powered second fix nailer R-RAWL-B1664

BASE MATERIALS ✓


- Timber
- Plywood
- Chipboard
- Wood



Rawlplug code	Gauge	Length	Finish	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight
		[mm]			[pcs]	[pcs]	[pcs]	[kg]	[kg]
BRADS1619	16 Gauge	19	Galvanised	0° glue laminated	50	2000	2	0.78	0.78
BRADS1625	16 Gauge	25	Galvanised	0° glue laminated	50	2000	2	0.94	0.94
BRADS1625SS	16 Gauge	25	Stainless Steel	0° glue laminated	50	2000	2	0.94	0.94
BRADS1632	16 Gauge	32	Galvanised	0° glue laminated	50	2000	2	1.14	1.14
BRADS1638	16 Gauge	38	Galvanised	0° glue laminated	50	2000	2	1.30	1.30
BRADS1638SS	16 Gauge	38	Stainless Steel	0° glue laminated	50	2000	2	1.32	1.32
BRADS1645	16 Gauge	45	Galvanised	0° glue laminated	50	2000	2	1.50	1.50
BRADS1650	16 Gauge	50	Galvanised	0° glue laminated	50	2000	2	1.63	1.63
BRADS1650SS	16 Gauge	50	Stainless Steel	0° glue laminated	50	2000	2	1.68	1.68
BRADS1664	16 Gauge	64	Galvanised	0° glue laminated	50	2000	2	2.04	2.04

ANGLED BRAD NAILS

16 gauge angled brad nails for all second fix applications

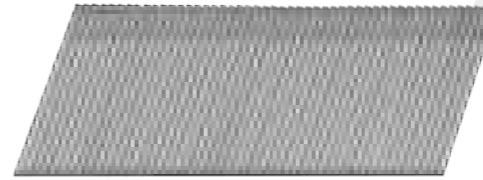

ANGLED BRAD NAILS

FEATURES AND BENEFITS ✓

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

APPLICATIONS ✓

- Installation of wooden façades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on façades and other timber structures

BASE MATERIALS ✓

- Timber
- Plywood
- Chipboard
- Wood



CORRESPONDING PRODUCTS ✓

- Gas powered second fix nailer R-RAWL-A2064
- Gas powered second fix nailer R-RAWL-B1664

Rawlplug code	Gauge	Length	Finish	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box Weight	Outer Weight
		mm			[pcs]	[pcs]	[pcs]	[kg]	[kg]
BRADS2032	16 Gauge	32	Galvanised	20° glue laminated	50	2000	2	0.3	1.18
BRADS2038	16 Gauge	38	Galvanised	20° glue laminated	50	2000	2	0.3	0.60
BRADS2045	16 Gauge	45	Galvanised	20° glue laminated	50	2000	2	0.4	0.80
BRADS2050	16 Gauge	50	Galvanised	20° glue laminated	50	2000	2	0.4	1.72
BRADS2050SS	16 Gauge	50	Stainless Steel	20° glue laminated	50	2000	2	0.5	1.76
BRADS2064	16 Gauge	64	Galvanised	20° glue laminated	50	2000	2	0.5	1.00

PNEUMATIC ACTUATED TOOLS



Pneumatic coil nailer

Magazine capacity of up to 400 nails provides less time needed for reloading

Pneumatic plastic strip nailer

Simplicity of tool design ensures low maintenance and high reliability

PNEUMATIC ACTUATED TOOLS
HIGH POWER AND DURABILITY WITH LIMITED MOBILITY

PNEUMATIC SOLUTIONS
PNEUMATIC COIL NAILER



Best for:
• manufacturing pallets,
• wooden packaging,
• all timber applications



PNEUMATIC STRIP NAILERS



OIL LUBRICATED COMPRESSOR

MAXIMUM PREASSURE **8 BAR**

HOSE REEL

MAXIMUM PREASSURE **10 BAR**



R-RAWL-PN-3490 PNEUMATIC FRAMING NAILER

Pneumatic paper strip nailer for timber framing, roofing and other timber applications



FEATURES AND BENEFITS

- Nail range from 50mm to 90mm for wide range of applications
- Adjustable exhaust port is an important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- Depth of drive adjustment provides fine tuning installation depth in a type of substrate material and application
- Removable no mark nose for protecting the timber surface. Especially important when securing timber cladding or façades
- More powerful than gas powered equivalent of the same specification. Up to 10% more power ensures outstanding performance in all applications and timber types

CORRESPONDING PRODUCTS

- SPG-DPK paper collated nails without fuel cells
- SPG-DRG paper collated nails without fuel cells
- SPG-DRK paper collated nails without fuel cells

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



APPLICATIONS

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of wooden façades
- Installation of timber flooring and terraces

SET INCLUDES

- R-RAWL-PN-3490 Pneumatic framing nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses and ear plugs
- Case

Rawplug code	Power source	Magazine type	Magazine capacity	Magazine angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maximum pressure	Operating pressure	Fastener type	Dimensions	Box Weight	Outer Weight
			[nail]	[degree]		[mm]	[mm]					[mm]		
R-RAWL-PN-3490	Pneumatic	Strip	88	34	3.8	2.8 - 3.4	50 - 90	94	8	5-7	D head nail	420x125x370	7.19	14.37

R-RAWL-PNP-130 PNEUMATIC FRAMING NAILER

Pneumatic plastic strip nailer for timber framing, roofing and other timber applications



FEATURES AND BENEFITS

- Nail range from 90mm to 130 mm widens the range of typical applications
- Removable no mark nose for protecting the timber surface. Especially important when securing timber cladding or façades
- Magazine capacity of 50 nails provides less time needed for reloading
- Adjustable exhaust port is an important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- Depth adjustment allows the operator to easily adjust the depth that the nail is driven into timber to produce a precise and secure fixing
- Simplicity of tool design ensures low maintenance and high reliability

CORRESPONDING PRODUCTS

- R-GPG plastic collated nails
- R-RAWL-C50 or C50-10 Oil lubricated compressor
- R-RAWL-C100-P Oil lubricated compressor

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



APPLICATIONS

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of wooden façades
- Manufacturing of timber standardised structure like Timber frame houses or roof elements

SET INCLUDES

- R-RAWL-PNP-130 Pneumatic framing nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses

Rawplug code	Power source	Magazine type	Magazine capacity	Magazine angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maximum pressure	Operating pressure	Box Weight	Outer Weight
			[nail]	[degree]		[mm]	[mm]					
R-RAWL-PNP-130	Pneumatic	Strip	50	21	5.6	3.3 - 4.2	90 - 130	94	9	5-7	7.92	7.92

R-RAWL-PMC-38 PNEUMATIC JOIST HANGER NAILER

Compact pneumatic positive placement nailer for quick installation of metal connectors



FEATURES AND BENEFITS

- Compatible with all 38 twist shank nails present on the market for freedom of choice
- Nose tip with probe mechanism locates the tool in the pre drilled hole for a precise and quick fixing. Easy to operate even in areas with limited access
- Extremely lightweight and maneuverable which is an advantage when operating in areas with limited access
- Reduced risk of hand injury thanks to low recoil and low weight
- Magazine capacity 30 nails enables to limit the time needed for reloading
- Rotary belt hook provides safety and comfort during daily operation
- 360 degree rotary air connector allows for great accessibility in tight spaces

CORRESPONDING PRODUCTS

- R-DPCG paper collated nails
- R-RAWL-C24 Oil lubricated compressor
- R-RAWL-C50 Oil lubricated compressor

CERTIFICATE



BASE MATERIALS

- Timber
- Wood



APPLICATIONS

- Installation of all types of metal connectors
- Installation of truss supports and angled joints
- Installation of perforated steel tapes

SET INCLUDES

- R-RAWL-PMC-38 Pneumatic positive placement nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses and ear plugs
- Case

Rawplug code	Power source	Magazine type	Magazine capacity	Magazine angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maximum pressure	Operating pressure	Box Weight	Outer Weight
			[nail]	[degree]		[kg]	[mm]					
R-RAWL-PMC-38	Pneumatic	Strip	29	34	2.5	3.3 - 4.1	38	94	8	5-7	4.64	23.19

R-RAWL-PN PNEUMATIC COIL NAILER

Pneumatic coil nailer for manufacturing pallets, wooden packaging and other timber product



FEATURES AND BENEFITS

- Nail range from 25mm to 57mm widens the range of typical applications
- Adjustable exhaust port is an important safety feature when operating in areas where other persons may be affected by the exhausted air and particles
- Ergonomic design and well balance for higher comfort of daily use and reduced risk of injury
- Nail cover from magazine to nose for safety of operation
- Very low recoil value provides great improvement in operators comfort of using the tool
- Magazine capacity up to 400 nails significantly reduces reload time

CORRESPONDING PRODUCTS

- R-GDP wire collated nails
- R-RAWL-C24 Oil lubricated compressor
- R-RAWL-C50 Oil lubricated compressor

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



APPLICATIONS

- Manufacturing pallets, packaging and external trim
- Installation of timber flooring and terraces

SET INCLUDES

- R-RAWL-PN-57 Pneumatic coil nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses

Rawplug code	Power source	Magazine type	Magazine capacity	Magazine angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maximum pressure	Operating pressure	Dimensions	Box Weight	Outer Weight
			[nail]	[degree]		[kg]	[mm]						
R-RAWL-PN-57	Pneumatic	Coil	16	2.5	2.1 - 2.3	25 - 57	94	8	5-7	300 - 400	285x135x285	3.63	18.14
R-RAWL-PN-70	Pneumatic	Coil	225 - 300	16	3.6	2.5 - 2.9	45 - 70	99	8	5-7	318x125x320	4.98	19.93
R-RAWL-PN-83	Pneumatic	Coil	225 - 300	16	3.7	2.5 - 3.3	50 - 83	101	8	5-7	349x129x313	5.38	21.54
R-RAWL-PN-90	Pneumatic	Coil	16	4.32	2.5 - 3.3	50 - 90	95.1	8	5 - 7	300	350x130x360	4.30	17.20

R-RAWL-PRN-45 PNEUMATIC ROOFING NAILER

Pneumatic coil nailer for manufacturing pallets, wooden packaging and other timber product



FEATURES AND BENEFITS

- Nail range from 22mm to 45mm provides wide range of application
- Very low recoil value provides great improvement in operators comfort of using the tool
- Tool free depth adjustment. The operator can easily adjust the depth that the nail is driven into timber to produce a precise fixing
- Ergonomic design and well balance for higher comfort of daily use and reduced risk of injury
- Extremely light weight and maneuverable which is an advantage when operating in areas with limited access
- Guide plate ensures the perpendicularity of the tool against the roof surface

CORRESPONDING PRODUCTS

- R-RAWL-C50 Oil lubricated compressor
- R-RAWL-C50-10 oil lubricated air compressor

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Wood
- Chipboard



APPLICATIONS

- Installation of felt roofing
- Installation of roofing foil and breather membranes

SET INCLUDES

- R-RAWL-PRN-45 Pneumatic roofing nailer
- Spare gasket set
- Operating and Safety manual
- Safety glasses

Rawplug code	Power source	Magazine type	Magazine angle	Weight	Fastener diameter range	Fastener length range	Noise level	Maximum pressure	Operating pressure	Magazine capacity	Dimensions	Box Weight	Outer Weight
			[degree]										
R-RAWL-PRN-45	Pneumatic	Coil	16	2.6	3.05	22 - 45	95.6	8	5-7	120	283x118x269	3.58	17.88

SPG-DPG PAPER COLLATED NAILS WITHOUT FUEL CELLS

Smooth shank galvanised nails for timber framing, roofing and other timber applications



FEATURES AND BENEFITS

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Minimum of 10 microns zinc coating provides great corrosion protection
- A wide variety of combinations of nail coatings and finishes allows everyone to find the right solution for a particular application

CORRESPONDING PRODUCTS

- R-RAWL-PN-3490

CERTIFICATE



BASE MATERIALS

- Timber
- Plywood
- Chipboard
- Wood



APPLICATIONS

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden façades

R-RAWL-C20-PRO OIL LUBRICATED COMPRESSOR

Oil lubricated compressor R-RAWL-C20-PRO for demanding construction applications



FEATURES AND BENEFITS

- Best quality electronic components ensure stable working conditions and low operating cost
- Brushless motor with a power of 2,5 HP provides the best performance and low maintenance. Brushless technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage
- Robust wheels and additional rubber feet for better stability
- Stable output air parameters thanks to tank pressure manometer and precise pressure adjust regulator
- Provides high efficiency thanks to durable 10 Bar max pressure pump and double standard 3/8" quick coupling
- High efficiency pump and durable design can be used to power more than one tool at the same time

APPLICATIONS

- Powering nailers, wrenches and other pneumatic tools
- Suitable for all applications requiring increased amount of compressed air
- Professional and industrial applications like powering torque wrenches or high power nailers

CORRESPONDING PRODUCTS

- R-RAWL-PMC-38 Pneumatic joist hanger nailer
- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PN-57 Pneumatic coil nailer
- R-RAWL-PN-70 Pneumatic coil nailer
- R-RAWL-PN-83 Pneumatic coil nailer
- R-RAWL-PN-90 Pneumatic coil nailer
- R-RAWL-PNP-130 Pneumatic framing nailer

CERTIFICATE



Index	Air output	Cord length	Lubrication	Maximum pressure	Noise level	Operating pressure	Operating temperatures	Power	Tank size	Box Weight	Outer Weight
	[L/min]	[m]		[bar]	[dB]	[bar]	[°C]		[L]	[kg]	[kg]
R-RAWL-C20-PRO	300	3	Yes	10	72	5-8	0 - +35	1,8	20	21.00	22.00

R-RAWL-C50 OIL LUBRICATED COMPRESSOR

50 litre portable air compressor tank for semi professional and DIY applications



FEATURES AND BENEFITS

- Best quality electronic components ensure stable working conditions and low operating cost
- Brushless motor with a power of 2.25 HP. Brushless technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage. The design prevents the most frequent type of damage and reduces service cost
- Robust wheels and additional rubber feet for better stability

APPLICATIONS

- Supplying professional equipment with compressed air
- Craftsman and DIY applications requiring increased amount of compressed air
- Dedicated to DIY applications like inflating bike or car tires

CORRESPONDING PRODUCTS

- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PSC40 Pneumatic steel and concrete nailer
- R-RAWL-PMC-38 Pneumatic joist hanger nailer

SET INCLUDES

- R-RAWL-C50 Oil lubricated compressor
- Operating and Safety manual

CERTIFICATE



Rawlplug code	Tank size	Lubrication	Power	Air output	Noise level	Weight	Box Weight	Outer Weight
	[L]		[HP]	[L/min]	[dB]			
R-RAWL-C50	50	Oil lubricated	2,25	200	95	34	33.22	33.22

R-RAWL-C50-10 OIL LUBRICATED COMPRESSOR

50 litre portable air compressor tank for professional applications



FEATURES AND BENEFITS

- Best quality electronic components ensure stable working conditions and low operating cost
- Brushless motor with a power of 2.5 HP. Brushless technology is the most reliable drive type used in power tools and mobile equipment providing low damage risk and maintenance cost
- Oil lubricated pump with direct drive provides high performance and stable operation of the compressor
- Built in intake filter to avoid damage in transport and storage
- Robust wheels and additional rubber feet for better stability

APPLICATIONS

- Powering nailers, wrenches and other pneumatic tools
- Suitable for all applications requiring increased amount of compressed air
- Professional and industrial applications like powering torque wrenches or high power nailers

CORRESPONDING PRODUCTS

- R-RAWL-PMC-38 Pneumatic joist hanger nailer
- R-RAWL-PN-3490 Pneumatic framing nailer
- R-RAWL-PN-57 Pneumatic coil nailer

CERTIFICATE



Rawlplug code	Air output	Cord length	Lubrication	Maximum pressure	Noise level	Operating pressure	Operating temp.	Power	Tank size	Box Weight	Outer Weight
	[L/min]	[m]		[bar]	[dB]	[bar]	[°C]		[HP]	[L]	[kg]
R-RAWL-C50-10	244	3	Yes	10	95	5 - 7	0 - +35	3	50	50.00	50.00

HOSE REEL



FEATURES AND BENEFITS

- Rigid steel construction ensures that the product will withstand toughest conditions that may occur on a work site.
- Reinforced poli-urethane hose provides stability of parameters especially while working long distance from a compressor.
- Hose reel construction makes it ideal to store and transport and being very efficient on a building site.
- Standard 3/8" quick coupling connector provides compatibility to most of the compressed air tools one can find on the market.

APPLICATIONS

- Air supply connection between a compressor and the tool

CERTIFICATE



Rawlplug code	Description	Dimensions [mm]	Hose material	Hose length [m]	Hose diameters [mm]	Quick release coupling	Weight [kg]
R-COMP-HOSEREEL	Hose reel for pneumatic tools	340 x 300 x 375	Reinforced poliurethane	30	8/12	3/8"	9

STAPLERS & STAPLES

Two-component non-slip handle **increases productivity and comfort**

Two position driving force adjustment allows to precisely **set the depth of the staple in various materials**

Folding handle for **easy transport**

Bottom cartridge belt with clip lock allows for the **quick reloading of staples**

Hardened wire used to manufacture staples ensures trouble-free installation in hard surfaces

Galvanized zinc coating protects the staple from corrosion

A view on the staple count allows you to **quickly check the number of staples in the clip**

Compact aluminium body for **increased impact resistance**

Flat spring **extends life and reduces recoil**

6 in 1 heavy duty for all types of staples and pins (RL53, RL13, RL140, RL36, RL8, RL9)

STAPLING GUIDE

STEP 1 SELECT STAPLES
STEP 2 CHOOSE YOUR STAPLER

STEP 1 SELECT STAPLES

<p>1 THIN FINEWIRES</p> <p>RL53 6-14 mm RL13 6-14 mm</p> <p>To decoration and less demanding activities</p>	<p>2 FLAT WIRES</p> <p>RL140 6-14 mm</p> <p>To more demanding jobs</p>	<p>3 CABLES</p> <p>RL36 10-14 mm</p> <p>For low voltage cables</p>
---	--	--

SELECTION OF LENGTH

<p>MATERIAL THICKNESS X 3</p>	<p>FASTENING OF SMALLCOR THIN MATERIALS (FOIL, FABRIC TEXTILE ETC.)</p> <p>Recommended staple of 4 mm longer than the base material thickness</p>	<p>FASTENING OF WOOD OR OTHER SOLID MATERIALS</p> <p>Recommended staple: twice longer than fasten material thickness</p>
--------------------------------------	--	---

STEP 2 CHOOSE YOUR STAPLER

HAND STAPLERS

- perfect for projects where there is **no need using a large amount of staples**
- used by professionals, house decoration passionate and homework users



HAMMER TACKER

- recommended for **quick jobs on larger areas** where stapling precision is not the most crucial requirement
- recommended for fixing building materials such as roofing felt, shingles and plastic insulation



RT-KGR0011 HAMMER TACKER, 6-10 MM

Roofing hammer tacker; Professional line; Type 140; 6-10 mm



FEATURES AND BENEFITS

- Steel body for increased impact resistance
- A view on the staple count allows you to quickly check the number of staples in the clip
- „Try me“ packaging allows free access to all the features
- Ergonomic handle increases operator comfort

BASE MATERIALS

- Chipboard
- Oriented Strand Board
- Timber
- Wood
- Plasterboard
- Exotic Wood



CORRESPONDING PRODUCTS

- RT-KSS140 Staples RL 140
- RT-KSS1400 Staples RL 140 - box
- RT-KSS140 Stainless steel staples RL 140

PACKAGING



APPLICATIONS

- Designed for attaching tar paper roofing and fixing foil and roof insulation



Rawlplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0011	6-14	1	10	20	1.10	11.00	22.00	Double blister

RT-KGR0013 HAMMER TACKER – ROOFING PRO 6-14 MM

Heavy duty hammer tacker for flat wire staples; Professional line; Type 140; 6-14 mm



FEATURES AND BENEFITS

- Ergonomic handle increases operator comfort
- Steel body for increased impact resistance
- A view on the staple count allows you to quickly check the number of staples in the clip
- „Try me“ packaging allows free access to all the features

BASE MATERIALS

- Oriented Strand Board
- Timber
- Wood
- Plasterboard
- Exotic Wood



CORRESPONDING PRODUCTS

- RT-KSS140 Staples RL 140
- RT-KSS1400 Staples RL 140 – box
- RT-KSS140 Stainless steel staples RL 140

PACKAGING



APPLICATIONS

- Designed for attaching tar paper roofing and fixing foil and roof insulation



Rawlplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0013	6-14	1	10	10	0.90	9.00	9.00	Double blister

RT-KGR0014 HAND STAPLER - TRADE, 6-10 MM

Lightweight stapler for flat wire staples; Professional line; Type 140; 6-10 mm



FEATURES AND BENEFITS

- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- „Try me“ packaging allows free access to all the features

CORRESPONDING PRODUCTS

- RT-KSS1400 Staples RL 140 -box
- RT-KSS140 Staples RL 140
- RT-KSS140 Stainless steel staples RL 140

PACKAGING



BASE MATERIALS

- Chipboard
- Exotic Wood
- Plasterboard
- Oriented Strand Board
- Timber
- Wood



APPLICATIONS

- For heavy-duty carpentry, construction and finishing work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0014	6-14	1	10	40	0.48	4.81	19.24	Double blister

RT-KGR0024 HAND STAPLER - UNIVERSAL TRADE 3 IN 1, 6-14 MM

Heavy duty stapler for flat wire staples; Professional line; Type 140; 6-14 mm



FEATURES AND BENEFITS

- Wide range of uses: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Smoothly adjustable punching force allows for adjusting the driving force to the type of material
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil

CORRESPONDING PRODUCTS

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS140 Staples RL 140
- RT-KSS1400 Staples RL 140 – box
- RT-KSS140 Stainless steel staples RL 140

PACKAGING



BASE MATERIALS

- Chipboard
- Plasterboard
- Oriented Strand Board
- Timber
- Wood
- Plywood



APPLICATIONS

- For heavy-duty carpentry, construction and finishing work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0024	6-14	1	10	20	0.78	7.80	15.54	Double blister

RT-KGR0029 HAND STAPLER - POWERFUL EASY SHOT 3 IN 1, 6-14 MM

Durable stapler for fine wire staples with unique pre-tension trigger mechanism and aluminium body; Universal line; Type 53; 6-14 mm



FEATURES AND BENEFITS

- Trigger switch allows for shooting with a trigger
- Wide range of use: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transport
- Two-component non-slip handle increases productivity and comfort
- Two-step adjustable punching force allows for adjusting the driving force to the type of material
- Aluminum body, lightweight, impact-resistant housing
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip

CORRESPONDING PRODUCTS

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

PACKAGING



BASE MATERIALS

- Oriented Strand Board
- Plywood
- Fabric
- Timber
- Plastic
- Chipboard



APPLICATIONS

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0029	6-14	1	10	20	0.84	8.40	16.88	Double blister

RT-KGR0031 HAND STAPLER - 3 IN 1, 6-14 MM

Heavy duty stapler for fine wire staples, suitable for pins and brads; Universal line; Type 53; 6-14 mm



FEATURES AND BENEFITS

- Wide range of uses: 6-14 mm staples, 14 mm nails, 14 mm pins
- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Smoothly adjustable punching force allows for adjusting the driving force to the type of material
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil

CORRESPONDING PRODUCTS

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

PACKAGING



BASE MATERIALS

- Laminate
- Plastic
- Plywood
- Timber
- Wood
- Fabric



APPLICATIONS

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0031	6-14	1	10	20	0.91	9.06	18.11	Double blister

RT-KGR0032 HAND STAPLER - HOUSEHOLD, 6-14 MM

Heavy duty stapler for fine wire staples; Universal line; Type 53; 6-14 mm



FEATURES AND BENEFITS

- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Smoothly adjustable punching force allows for adjusting the driving force to the type of material
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- „Try me“ packaging allows free access to all the features

CORRESPONDING PRODUCTS

- RT-KSS53 Staples RL 53

PACKAGING



BASE MATERIALS

- Chipboard
- Fabric
- Oriented Strand Board
- Plastic
- Plywood
- Wood



APPLICATIONS

- Designed for difficult tasks
- Used for upholstery and decorative work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0032	6-14	1	10	20	0.64	6.37	12.73	Double blister

RT-KGR0034 HAND STAPLER - COMPACT 3 IN 1, 6-14 MM

Heavy duty stapler for fine wire staples, suitable for pins and brads; Universal line; Type 53; 6-14 mm



FEATURES AND BENEFITS

- Compact steel body for increased impact resistance
- Two-step adjustable punching force allows for adjusting the driving force to the type of material
- Folding handle for easy transport
- Two-component non-slip handle increases productivity and comfort
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- „Try me“ packaging allows free access to all the features

CORRESPONDING PRODUCTS

- RT-KSS00814 RL8 Nails 14 mm
- RT-KSS00914 RL9 Pins 14 mm
- RT-KSS53 Staples RL 53

PACKAGING



BASE MATERIALS

- Laminate
- Plastic
- Plywood
- Timber
- Wood
- Fabric



APPLICATIONS

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0034	6-14	1	10	40	0.40	4.00	16.00	Double blister

RT-KGR0053 HAND STAPLER - EASY SQUEEZE, 6-10 MM



FEATURES AND BENEFITS

- Folding handle for easy transportation
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- „Try me“ packaging allows free access to all the features

CORRESPONDING PRODUCTS

- RT-KSS53 Staples RL 53

BASE MATERIALS

- Fabric
- Oriented Strand Board
- Plywood and cardboard



APPLICATIONS

- Used for upholstery and decorative work
- For office use



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0053	6-14	1	10	40	0.23	2.33	9.30	Double blister

RT-KGR00153 HAND STAPLER - HANDY, 6-10 MM

Heavy duty universal stapler for fine wire staples; Universal line; Type 53; 6-10 mm



FEATURES AND BENEFITS

- Folding handle for easy transportation
- Two-component non-slip handle increases productivity and comfort
- Steel body for increased impact resistance
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- „Try me“ packaging allows free access to all the features

CORRESPONDING PRODUCTS

- RT-KSS53 Staples RL 53

BASE MATERIALS

- Chipboard, wood and timber
- Fabric
- Oriented Strand Board
- Plastic



APPLICATIONS

- Designed for difficult tasks
- Used for upholstery and decorative work



Rawplug code	Range [mm]	Quantity [units]			Weight [kg]			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit	Inner	Outer	
RT-KGR0153	6-14	1	10	40	0.52	5.21	20.86	Double blister

RT-KGR0162 HAND STAPLER, 6 IN 1 HEAVY DUTY

Durable and comfortable stapler for various applications



FEATURES AND BENEFITS

- Compact aluminium body for increased impact resistance
- Two position driving force adjustment allows to precisely set the depth of the staple in various materials
- Folding handle for easy transport
- Two-component non-slip handle increases productivity and comfort
- Bottom cartridge belt with clip lock allows for the quick reloading of staples
- A view on the staple count allows you to quickly check the number of staples in the clip
- Flat spring prolongs life and reduces recoil
- „Try me“ packaging allows free access to all the features

BASE MATERIALS

- Paper
- Chipboard
- Timber and wood



APPLICATIONS

- Designed for difficult tasks that require comprehensive tools, offering both stapling and nailing
- Used for upholstery and decorative work
- Temporary fixings
- Construction and industrial applications



Rawplug code	Range [mm]	Quantity			Weight			Packaging type
		Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-KGR00162	6-14	1	10	10	0.20	2.00	2.00	Double blister

DURABLE GLUE GUNS

PROFESSIONAL GLUE GUNS



Designed for 11-12 mm adhesives

Mechanical feeding of adhesive with adjustable trigger stroke allows for precise adjustment of the glue feed

Balance hook keeps the gun nozzle down when the gun is hanging loose

The dual heating system ensures a very short warm-up time and high performance

4-finger trigger ensures precise glue application

Replaceable nozzles for different operating modes

The wide stand ensures a very stable position when the gun is not in use

The switch provides more security and comfort of use

RT-GG-180 PROFESSIONAL GLUE GUN 180W

A durable glue gun with fast warm-up and high efficiency



FEATURES AND BENEFITS


- Designed for 11-12 mm adhesives
- Mechanical feeding of adhesive with adjustable trigger stroke allows for precise adjustment of the glue feed
- Balance hook keeps the gun nozzle down when the gun is hanging loose
- 4-finger trigger ensures precise glue application
- The switch provides more security and comfort of use
- The dual heating system ensures a very short warm-up time and high performance
- Replaceable nozzles for different operating modes
- The wide stand ensures a very stable position when the gun is not in use

CORRESPONDING PRODUCTS

- RT-GS-C Glue sticks for bonding cardboard
- RT-GS-E Extra strong glue sticks
- RT-GS-G Glue sticks with glitter
- RT-GS-K Color glue sticks
- RT-GS-P Glue sticks for bonding plastic

BASE MATERIALS

- Plastic
- Wood
- Plywood
- Metal Sheet & Profiles
- Natural Stone
- Ceramics



APPLICATIONS

- Production line
- Packing
- Installing pipe insulation
- Installation works
- Installation
- Repairs

WARRANTY



Rawplug code	Quantity [units]			Weight			Packaging type
	Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GG-180	1	1	6	1.22	1.22	7.33	Box
RT-GG-180-UK	1	1	6	1.22	1.22	7.33	Box

RT-GG-080 UNIVERSAL GLUE GUN 80W

A durable glue gun with fast warm-up and high efficiency



FEATURES AND BENEFITS

- Designed for 11-12 mm adhesives
- Mechanical feeding of adhesive allows for the precise dosage
- Balance hook keeps the gun nozzle down when the gun is hanging loose
- 4-finger trigger ensures precise glue application
- Wide folding stand provides greater stability for the gun while standing
- Special nozzle prevents leakage of adhesive
- Silicone lining along the nozzle prevents burns

CORRESPONDING PRODUCTS


- RT-GS-W Glue sticks for bonding wood
- RT-GS-U Universal glue sticks
- RT-GS-S Glue sticks for sanitary use
- RT-GS-P Glue sticks for bonding plastic
- RT-GS-M Set of universal and extra strong glue sticks

WARRANTY



BASE MATERIALS

- Plastic
- Plasterboard
- Plywood
- Metal Sheet & Profiles
- Ceramics
- Glass



APPLICATIONS

- Repairs
- Installation works
- Woodworking
- Installation
- Installing pipe insulation
- Sealing

Rawplug code	Quantity [units]			Weight			Packaging type
	Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GG-080	1	6	12	0.58	3.48	7.00	Double blister
RT-GG-080-UK	1	6	12	0.58	3.48	7.00	Double blister

RT-GG-055 GLUE GUN 55W

Small gun for everyday use and finishing works



FEATURES AND BENEFITS

- Designed for 11-12 mm adhesives
- Mechanical feeding of adhesive allows precise dosage
- Lightweight and ergonomic design makes it easy to use
- Folding stand allows for safe gun placement during work
- Special nozzle prevents leakage of adhesive
- Silicone lining along the nozzle prevents burns

CORRESPONDING PRODUCTS


- RT-GS-C Glue sticks for bonding cardboard
- RT-GS-E Extra strong glue sticks
- RT-GS-G Glue sticks with glitter
- RT-GS-K Color glue sticks
- RT-GS-M Set of universal and extra strong glue sticks

WARRANTY



BASE MATERIALS

- Plastic
- Wood
- Plywood
- Metal Sheet & Profiles
- Natural Stone
- Ceramics



APPLICATIONS

- Installation
- Sealing
- Repairs
- Upholstery
- Decor
- Floral arrangements

Rawplug code	Quantity [units]			Weight			Packaging type
	Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GG-055	1	12	24	0.41	10.00	20.00	Box
RT-GG-055-UK	1	12	24	0.41	10.00	20.00	Box

RT-GS-U UNIVERSAL GLUE STICKS

Universal glue sticks for bonding the majority of commercially available materials



RT-GS-U1 RT-GS-U2 RT-GS-U2B

FEATURES AND BENEFITS


- The diameter of 12mm allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 30-35 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- The length of 100 mm allows gluing in hard to reach places
- Transparent adhesive allows applying in many areas
- Does not emit odor while working
- Resistance to temperature of -5°C enables operation at low temperatures
- Operating temperature of 170-210°C

CORRESPONDING PRODUCTS

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

BASE MATERIALS

- Cardboard
- Plastic
- Wood



APPLICATIONS

- Universal glue sticks for bonding the majority of commercially available materials

Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-U1	12	100	12	5	40	0.13	0.65	5.20	Double blister
RT-GS-U2	12	200	44	1	5	0.99	0.99	4.95	Double blister
RT-GS-U2B	12	200	10	1	15	0.23	0.23	3.41	Bag

RT-GS-C GLUE STICKS FOR BONDING CARDBOARD

Glue sticks for bonding cardboard and paper surfaces



RT-GS-C2 RT-GS-C2B

FEATURES AND BENEFITS


- The 12mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Very short curing time, 8-12 seconds, allowing for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Milky color of adhesive allows applying in many areas
- Does not emit odor while working
- Resistance to temperature of 0°C, enabling operations at low temperatures
- Melting temperature of 170-210°C

CORRESPONDING PRODUCTS

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

BASE MATERIALS

- Cardboard
- Paper



APPLICATIONS

- This glue stick is perfect for bonding cardboard and paper surfaces

Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-C2	12	200	44	1	5	1.02	1.02	5.11	Double blister
RT-GS-C2B	12	200	10	1	15	0.22	0.22	3.30	Bag

RT-GS-P GLUE STICKS FOR BONDING PLASTIC

Dedicated glue sticks for bonding any plastic materials



RT-GS-P2 RT-GS-P2B

FEATURES AND BENEFITS

- The 12mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Very short curing time, 8-12 seconds, allowing for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Milky color of adhesive allows applying in many areas
- Does not emit odor while working
- Resistance to temperature of 0°C, enabling operations at low temperatures
- Melting temperature of 170-210°C

CORRESPONDING PRODUCTS

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

BASE MATERIALS

- Plastic
- Paper



APPLICATIONS

- This glue stick is perfect for bonding cardboard and paper surfaces

Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-P2	12	200	44	1	5	1.01	1.01	5.04	Double blister
RT-GS-P2B	12	200	10	1	15	0.22	0.22	3.30	Bag

RT-GS-W GLUE STICKS FOR BONDING WOOD

Glue sticks for bonding surfaces of wood, wood-based materials and leather



RT-GS-W2

RT-GS-W2B

FEATURES AND BENEFITS

- The 12 mm diameter allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 30-35 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Honey color of adhesive allows applying in many areas and layers
- Does not emit odor while working
- Resistant to temperature of -5°C, enabling operation at low temperatures
- Melting temperature of 170-210°C

CORRESPONDING PRODUCTS

- RT-GG-055 Glue gun 55W
- RT-GG-080 Universal glue gun 80W
- RT-GG-180 Professional glue gun 180W

BASE MATERIALS

- Wood
- Plywood
- Chipboard
- Oriented Strand Board



APPLICATIONS

- For bonding wood surfaces, wood-based materials and leather

Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-W2	12	200	44	1	5	0.98	0.98	4.90	Double blister
RT-GS-W2B	12	200	10	1	15	0.22	0.22	3.30	Bag

RT-GS-S GLUE STICKS FOR SANITARY USE

Glue sticks for bonding sanitary materials and products, e.g. appliances, tiles and plastic materials and cables



RT-GS-S2

RT-GS-S2B

FEATURES AND BENEFITS

- The white color of adhesive is ideally suited for use in a sanitary environment
- The diameter of 12mm allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 25-30 seconds, allows for quick work
- Does not emit odor while working
- The length of 200 mm allows for a longer operating time on one glue stick
- Resistance to temperature of 0°C enables operation at low temperatures
- Operating temperature of 170-210°C

APPLICATIONS

- For bonding sanitary materials and products, e.g. appliances, tiles and plastic materials and cables

Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-S2	12	200	44	1	5	0.98	0.98	4.92	Double blister
RT-GS-S2B	12	200	10	1	15	0.22	0.22	3.30	Bag

RT-GS-E EXTRA STRONG GLUE STICKS

Super strong glue sticks designed for gluing together heavy construction materials and metals



RT-GS-E1

RT-GS-E2


RT-GS-E2B

FEATURES AND BENEFITS

- The diameter of 12mm allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 35-40 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Honey color of adhesive allows applying in many areas
- Does not emit odor while working
- Resistance to temperature of -15°C enables operation at very low temperatures
- Operating temperature of 170-210°C

APPLICATIONS

- Super strong glue stick allows gluing together heavy construction materials and metals



Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-E1	12	100	12	5	40	0.13	0.65	5.20	Double blister
RT-GS-E2	12	200	44	1	5	0.96	0.96	4.80	Double blister
RT-GS-E2B	12	200	10	1	15	0.23	0.23	3.46	Bag

RT-GS-M SET OF UNIVERSAL AND EXTRA STRONG GLUE STICKS

A set of universal and super strong glue sticks for bonding different materials



FEATURES AND BENEFITS

- The diameter of 12mm allows the adhesive to be used in most adhesive guns available on the market
- Short curing time, 35-40 seconds, allows for quick work
- The length of 200 mm allows for a longer operating time on one glue stick
- Honey and transparent color of adhesive allows applying in many areas
- Does not emit odor while working
- Resistance to temperature of -15°C enables operation at very low temperatures
- Operating temperature of 170-210°C

APPLICATIONS

- A set of universal and super strong glue stick for bonding different materials



Rawplug code	Glue size	Length	Quantity [units]			Weight			Packaging type
			Units in set [pcs]	Inner [pcs]	Outer [pcs]	Unit [kg]	Inner [kg]	Outer [kg]	
RT-GS-M2	12	200	44	1	5	0.97	0.97	4.84	Double blister



” Screws

Screws for wood	144
Overview of screws for wood	146
Construction screws	148
Decking screws	152
Collated drywall screws	154
Screws for curtain walls	156

RAWLPLUG®

100 YEARS OF EXPERTISE IN FIXINGS, FASTENERS AND TOOLS

PROCUT CONSTRUCTION SCREWS MADE BY RAWLPLUG®

WOOD SCREWS




Oversize wafer head increases **clamping force and pull-through**



Countersunk head with **contoured pockets on the underside** support every type of application in wood



RAWLCYLINDER RPVZ / RPCZ the **cylindrical head with threading located directly below** for mounting

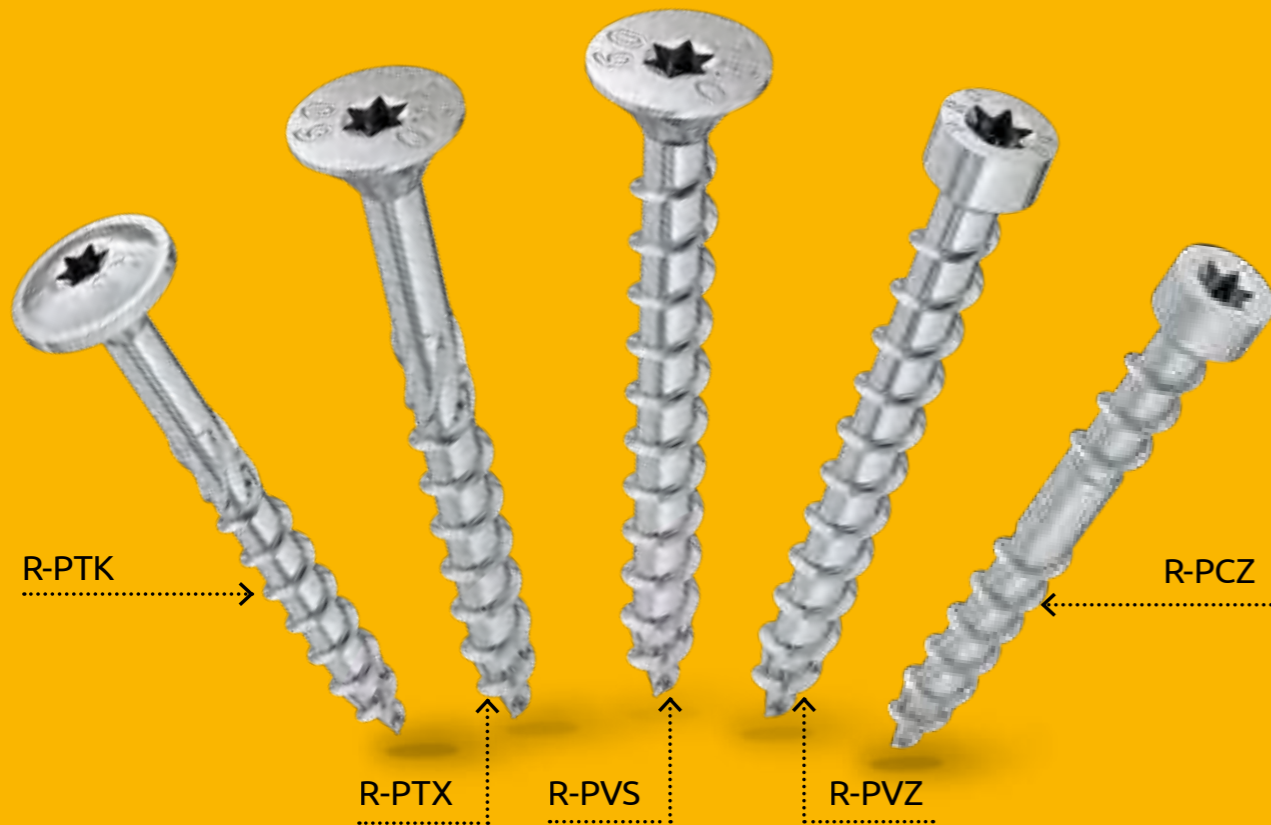

Partial thread with RAWLMILL - grinding point **reduce time** and amount of power required to drive the screw into the substrate



Full thread with increased sharpness **improves anchoring in all wood types** working as a reinforcement




Double thread with different pitch values **increases clamping force** to secure the fixture and substrate together



Transverse RIBSPLIT blades Rolled tip RAWLTIP ensures that screwdriving starts immediately

CONNECTIONS

IN TIMBER CONSTRUCTION

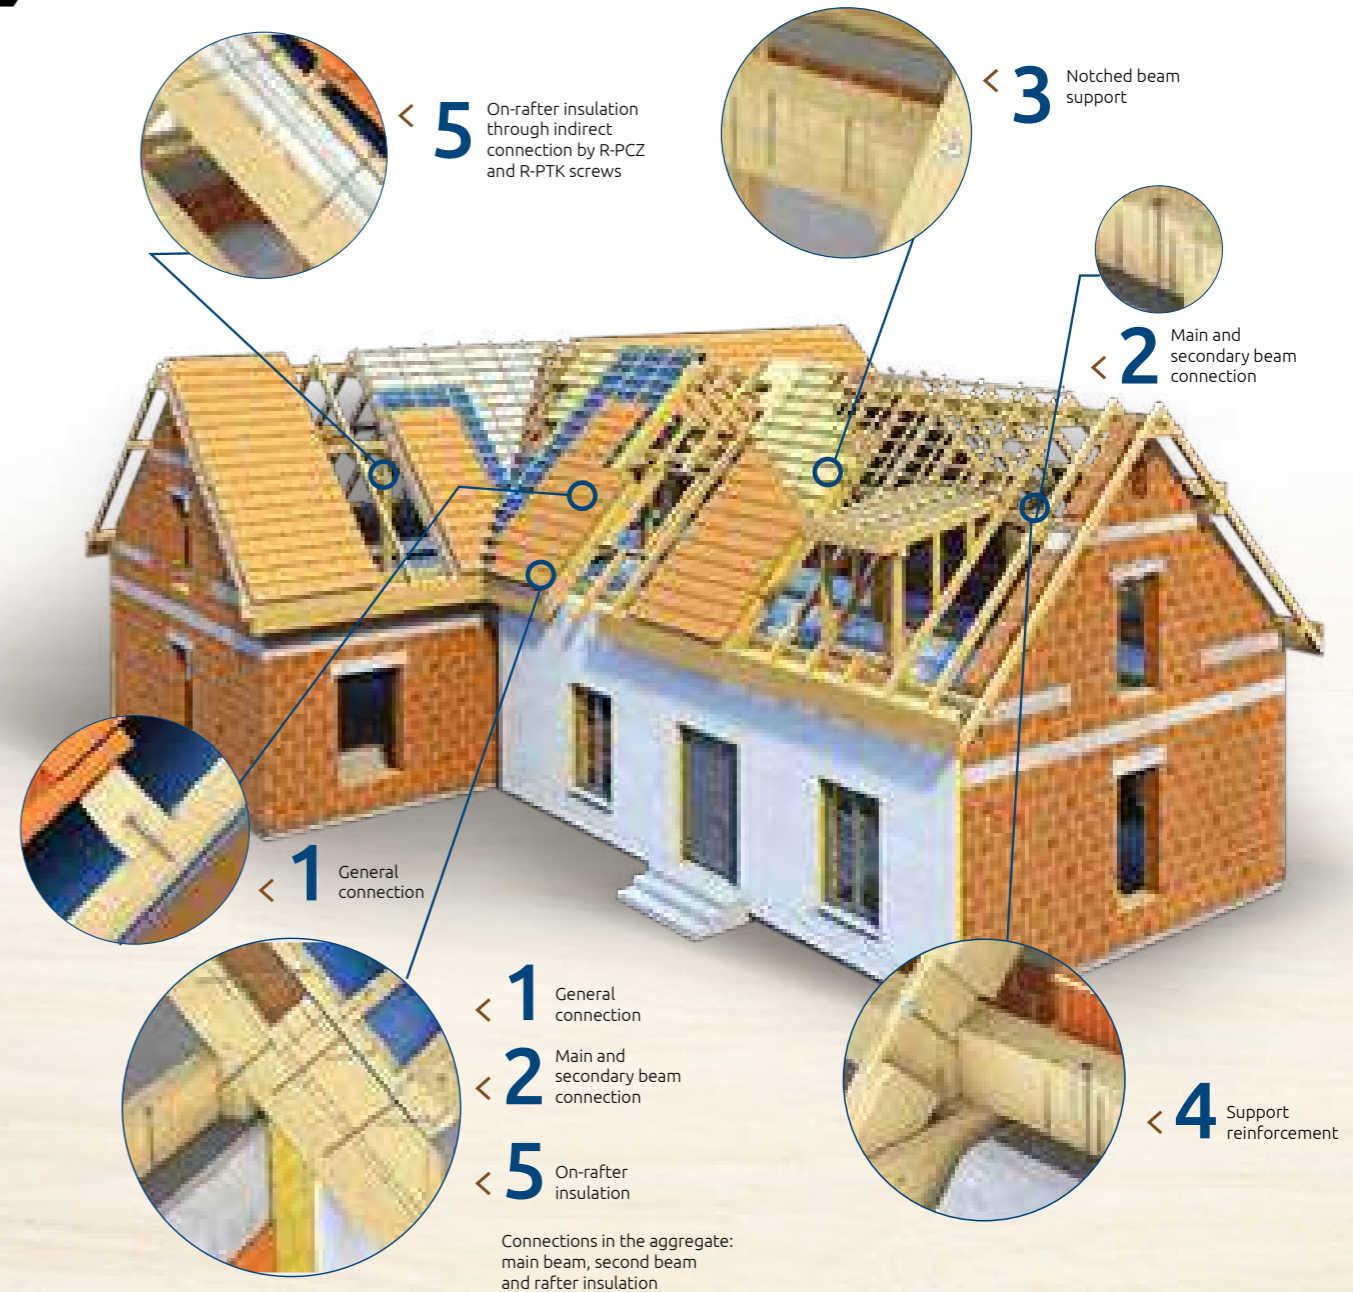

EasyFix


TIMBER CALCULATION SECTION IN EASY-FIX CALCULATION SOFTWARE ALLOWS FOR CALCULATION OF KEY CONNECTIONS IN WOODEN STRUCTURES

1 GENERAL CONNECTION	2 MAIN AND SECONDARY BEAM CONNECTION	3 NOTCHED BEAM SUPPORT	4 SUPPORT REINFORCEMENT	5 ON RAFTER INSULATION

R-PVZ CONSTRUCTION SCREW WITH CYLINDER HEAD AND FULL THREAD

Construction screw with cylinder head and full thread

NEW

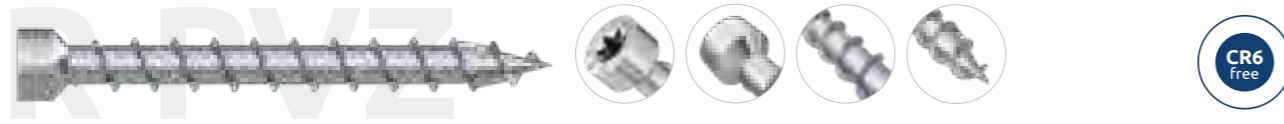

FEATURES AND BENEFITS

- Redesigned TX drive allows for tight connection with the bit
- Precisely rolled tip allows to start drilling immediately
- Crosswise drilling feathers push the wood fibers instead of cutting them, creating a hole of a correct diameter. It prevents from cracking and clogging the thread in the hole
- White zinc plating is not harmful for the environment


APPLICATIONS

- Structural reinforcements
- For concealed joints

BASE MATERIALS

Approved for use in:

- Structural timber
- Wood board
- Solid wood panels



Size	Rawplug code	Screw		Screw drive	Quantity		
		Diameter	Length		Box	Outer	
		d	L				pcs
mm	mm						
6.0	R-PVZ-60080	6	80	T30	200	200	
	R-PVZ-60100	6	100	T30	100	2400	
	R-PVZ-60120	6	120	T30	100	2400	
	R-PVZ-60140	6	140	T30	100	1200	
	R-PVZ-60160	6	160	T30	100	1200	
	R-PVZ-60180	6	180	T30	100	100	
	R-PVZ-60200	6	200	T30	100	100	
	R-PVZ-60220	6	220	T30	100	100	
	R-PVZ-60240	6	240	T30	100	100	
	R-PVZ-60260	6	260	T30	100	100	
	R-PVZ-60280	6	280	T30	100	100	
	R-PVZ-60300	6	300	T30	100	100	
	8.0	R-PVZ-80100	8	100	T40	50	1200
		R-PVZ-80120	8	120	T40	50	1200
R-PVZ-80140		8	140	T40	50	1200	
R-PVZ-80160		8	160	T40	50	600	
R-PVZ-80180		8	180	T40	50	50	
R-PVZ-80200		8	200	T40	50	50	
R-PVZ-80220		8	220	T40	50	50	
R-PVZ-80240		8	240	T40	50	50	
R-PVZ-80260		8	260	T40	50	50	
R-PVZ-80280		8	280	T40	50	50	
R-PVZ-80300		8	300	T40	50	50	
10.0		R-PVZ-10120	10	120	T50	50	50
		R-PVZ-10140	10	140	T50	50	50
		R-PVZ-10160	10	160	T50	50	50
	R-PVZ-10180	10	180	T50	50	50	
	R-PVZ-10200	10	200	T50	50	50	
	R-PVZ-10220	10	220	T50	50	50	
	R-PVZ-10240	10	240	T50	50	50	
	R-PVZ-10260	10	260	T50	50	50	
	R-PVZ-10280	10	280	T50	50	50	
	R-PVZ-10300	10	300	T50	50	50	
	R-PVZ-10350	10	350	T50	50	50	
	R-PVZ-10400	10	400	T50	50	50	
	R-PVZ-10450	10	450	T50	50	50	
	R-PVZ-10500	10	500	T50	50	50	
	R-PVZ-10550	10	550	T50	50	50	
	R-PVZ-10600	10	600	T50	50	-	

R-PCZ CONSTRUCTION SCREW WITH CYLINDER HEAD AND DOUBLE THREAD

Construction screw with cylinder head and double thread

NEW



FEATURES AND BENEFITS

- Redesigned TX drive allows for tight connection with the bit
- Precisely rolled tip allows to start drilling immediately
- Crosswise drilling feathers push the wood fibers instead of cutting them, creating a hole of a correct diameter. It prevents from cracking and clogging the thread in the hole
- White zinc plating is not harmful for the environment
- TX drive with a unified size across the diameters to limit the quantity of bits required


APPLICATIONS

- Fastening of the roof insulation package, preventing thermal bridges
- Carpentry and furniture works

BASE MATERIALS

Approved for use in:

- Structural timber
- Wood board



Size	Rawplug code	Screw				Screw drive	Quantity	
		Diameter	Length				Box	Outer
		d	L	L1	L2			
mm	mm	mm	mm	mm				
6.5	R-PCZ-65065	6.5	65	27	27	T30	100	2400
	R-PCZ-65100	6.5	100	45	45	T30	100	2400
	R-PCZ-65130	6.5	130	60	60	T30	100	1200
	R-PCZ-65150	6.5	150	70	70	T30	100	1200
	R-PCZ-65190	6.5	190	90	90	T30	100	100
	R-PCZ-65215	6.5	215	100	100	T30	100	100
	R-PCZ-85100	8.5	100	45	45	T40	100	100
	R-PCZ-85150	8.5	150	70	70	T40	100	100
	R-PCZ-85190	8.5	190	90	90	T40	100	100
	R-PCZ-85215	8.5	215	100	100	T40	50	50
8.5	R-PCZ-85250	8.5	250	115	115	T40	50	50
	R-PCZ-85270	8.5	270	125	125	T40	50	50
	R-PCZ-85300	8.5	300	140	140	T40	50	50
	R-PCZ-85350	8.5	350	160	160	T40	50	50
	R-PCZ-85400	8.5	400	185	185	T40	50	50

R-DSX GINGER RUSPERT DECKING SCREW

Decking screws for outdoor applications of wood and chipboard



FEATURES AND BENEFITS

- Produced of hardened carbon steel with coating layer to avoid stain in outdoor applications
- No pre-drilling required
- Drilling point to the very top of the screw for fast start
- The partial thread on the shaft of the screw allows multiple elements to be clamped together securely without separation
- Trim countersunk head with cutting ribs for easy countersinking and a precise flush finish
- TX drive guarantees secure transmission of screw-in torque and no pop-out of the bit
- Notched thread and wax coating for reduced friction
- Crack avoidance
- Energy saving screwdriver due to the minimized torque required to fixing the screw.

APPLICATIONS

- Decking
- Wooden elements exposed to water or mist
- Outdoor chipboard constructions
- Laminated wood and exotic wood construction
- Wooden fences

BASE MATERIALS


Approved for use in:

- Decking boards
- Exotic Wood
- Wood
- Chipboard
- Plywood
- Laminate
- PVC Profile



APPROVALS AND REPORTS


- PN-EN 14592 + A1:2012



Size	Rawplug code	Screw				Screw drive	Quantity	
		Diameter	Length	Thread length	Head diameter		Box	Outer
		mm	mm	mm	mm		pcs	pcs
4.0	R-DSX-4030	4.0	30	25	-	T15	200	6 400
	R-DSX-4040	4.0	40	24	4,6	T15	200	3 200
	R-DSX-4050	4.0	50	30	4,6	T15	200	3 200
	R-DSX-4060	4.0	60	36	4,6	T15	200	2 400
4.5	R-DSX-4540	4.5	40	24	4,6	T20	200	3 200
	R-DSX-4550	4.5	50	30	4,6	T20	200	3 200
	R-DSX-4560	4.5	60	36	4,6	T20	200	2 400
	R-DSX-4570	4.5	70	36	4,6	T20	100	1 600
5.0	R-DSX-4580	4.5	80	36	4,6	T20	100	1 200
	R-DSX-5050	5.0	50	30	8,0	T25	100	1 600
	R-DSX-5060	5.0	60	36	8,0	T25	100	1 600
	R-DSX-5070	5.0	70	42	8,0	T25	100	1 600
	R-DSX-5080	5.0	80	48	8,0	T25	100	1 200
	R-DSX-5100	5.0	100	60	8,0	T25	100	1 200
	R-DSX-5120	5.0	120	72	8,0	T25	100	1 200

R-DSX-A2 STAINLESS STEEL DECKING SCREWS

Decking screws for outdoor applications of wood and chipboard



FEATURES AND BENEFITS

- Stainless steel version to sustain mechanical properties for many years
- No pre-drilling required
- Drilling point to the very top of the screw for fast start
- The partial thread on the shaft of the screw allows multiple elements to be clamped together securely without separation
- Trim countersunk head with cutting ribs for easy countersinking and a precise flush finish
- TX drive guarantees secure transmission of screw-in torque and no pop-out of the bit
- Notched thread and wax coating for reduced friction
- Crack avoidance
- Energy saving screwdriver due to the minimized torque required to fixing the screw

APPLICATIONS

- Decking
- Wooden elements exposed to water or mist
- Outdoor chipboard constructions
- Laminated wood and exotic wood construction
- Wooden fences
- Plywood

BASE MATERIALS


Approved for use in:

- Decking boards
- Exotic Wood
- Wood
- Chipboard
- Plywood
- Laminate
- PVC Profile



APPROVALS AND REPORTS

- PN-EN 14592 + A1:2012



Size	Rawplug code	Screw				Screw drive	Quantity	
		Diameter	Length	Thread length	Head diameter		Box	Outer
		mm	mm	mm	mm		pcs	pcs
4.0	R-DSX-4030-A2	4.0	30	25	-	T15	200	6 400
	R-DSX-4040-A2	4.0	40	24	4,6	T15	200	3 200
	R-DSX-4050-A2	4.0	50	30	4,6	T15	200	3 200
	R-DSX-4060-A2	4.0	60	36	4,6	T15	200	2 400
4.5	R-DSX-4540-A2	4.5	40	24	4,6	T20	200	3 200
	R-DSX-4550-A2	4.5	50	30	4,6	T20	200	3 200
	R-DSX-4560-A2	4.5	60	36	4,6	T20	200	2 400
	R-DSX-4570-A2	4.5	70	36	4,6	T20	100	1 600
5.0	R-DSX-4580-A2	4,5	80	36	4,6	T20	100	1 200
	R-DSX-5050-A2	5.0	50	30	8,0	T25	100	1 600
	R-DSX-5060-A2	5.0	60	36	8,0	T25	100	1 600
	R-DSX-5070-A2	5.0	70	42	8,0	T25	100	1 600
	R-DSX-5080-A2	5.0	80	48	8,0	T25	100	1 200
	R-DSX-5100-A2	5.0	100	60	8,0	T25	100	1 200
	R-DSX-5120-A2	5.0	120	72	8,0	T25	100	1 200



PHOSPHATE-COATED FOR WOOD AND METAL

COLLATED DRYWALL SCREWS

Easy to drive due to **excellent drilling capability**



Top-quality material and dimensional accuracy of the **collating strip** for improved firmness and stability of screw feeding into the screwdriver, ensuring minimised screw jamming or skipping risk.




Screw head type: **Bugle head**

Screw drive type: **PH2**

Optimised system of collated screws and drywall screwdrivers


High setting frequency – get more done in less time

Designed for use with the **R-PDS18** screwdriver 18V



R-FTC DRYWALL COLLATED SCREWS FOR WOOD

Coarse thread drywall screw for fixing plasterboards to wooden framing

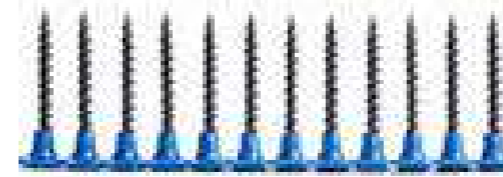

FTC

FEATURES AND BENEFITS


- Top-quality material and dimensional accuracy of the collating strip for improved firmness and stability of screw feeding into the screwdriver, ensuring minimised screw jamming or skipping risk.
- Optimised screw tip geometry - excellent drilling capability
- No pre-drilling required.
- Low-carbon steel with black phosphate finish for increased durability
- Bugle head with PH2 drive designed to finish flush with plasterboard

APPLICATIONS

- Fastening plasterboard walls to wooden framework

BASE MATERIALS

- Approved for use in:
- Fastening drywall boards to wood substructures



Rawplug code	Screw		Fasteners per strip	Quantity	
	Diameter	Length		Box	Pallet
	mm			pcs.	
R-FTC-3535	3,5	35	50	1000	120 000
R-FTC-3538	3,5	38	50	1000	120 000
R-FTC-3545	3,5	45	50	1000	120 000
R-FTC-3555	3,5	55	50	1000	120 000

R-FSC DRYWALL COLLATED SCREWS FOR METAL

Drywall screw with fine thread for plasterboard fixing



FSC

FEATURES AND BENEFITS

- Top-quality material and dimensional accuracy of the collating strip for improved firmness and stability of screw feeding into the screwdriver, ensuring minimised screw jamming or skipping risk.
- Optimised screw tip geometry - excellent drilling capability
- Low-carbon steel with black phosphate finish for increased durability
- Bugle head with PH2 drive designed to finish flush with plasterboard
- No pre-drilling required

APPLICATIONS

- Fastening plasterboard to metal framework (up to 0.88 mm)

BASE MATERIALS

- Approved for use in:
- Structural Steel



Rawplug code	Screw		Fasteners per strip	Quantity	
	Diameter	Length		Box	Pallet
	mm			pcs.	
R-FSC-3525	3,5	25	50	1000	180 000
R-FSC-3538	3,5	38	50	1000	180 000
R-FSC-3542	3,5	42	50	1000	180 000
R-FSC-3545	3,5	45	50	1000	180 000

SCREWS FOR CURTAIN WALLS

Optimised head height for **secure setting in socket and comfortable installation work**

Supporting thread to help in **adequate sealing washer pressing and to minimise the panel lining deflection risk**

Augmented diameter threads in the R-ORR version to **ensure transfer of maximum forces on installation in the thickest steel substrates**

Hardened surface of the fastener **improves its mechanical strength while maintaining its elasticity required to compensate panel lining displacement**

Drilling tip that enables direct installation in substrates with the following maximum depths:

- R-OCR: 6 mm
- R-ONR: 12 mm
- R-ORR: 18 mm





Head powder painting option

Profiled washer made of high-strength aluminium with integrated EPDM layer **to ensure tight and lasting joints**

Multi-layer Zinc Flake coating resistant to extremely corrosive conditions with roof tile-like overlapped structure of flakes to ensure long years of protection in environments of **corrosivity category up to C4**

Working thread of the R-ORR and R-ONR versions with a self-tapping profile and a notch that make cutting and removal of drillings easier



The R-OCR working thread's pitch geometry **dedicated to installation in steel sections**

R-OCR SELF-DRILLING SCREWS FOR COMPOSITE PANELS, MAX 6MM

Special-design drilling point ensuring fast and effortless fixing to metal structures made of cold-formed sections



FEATURES AND BENEFITS


- Coloured protective polyester coating of 45-50 µm in thickness (RAL, NCS, RR) ensuring additional corrosion protection and perfectly matching the steel decking colour. UV stabilisers guarantee colour stability over a long service life.
- Surface-hardened thread (combined with a core which maintains flexibility). Zinc coating of at least 12 µm in thickness for improved corrosion protection.
- Thread profile and length directly linked with the self-drilling fastener's intended use for fixing composite panels to steel structures.
- Two types of thread: one is intended for fixing to steel structures, and the other one directly under the screw head, having a higher pitch, protects the outer panel lining against dents and helps in sealing the joint.
- Drilling point of specially designed aggressive profile ensuring quick and effortless fixing to steel substrates. It allows you to complete drilling, tapping and fixing of elements together in one go. The sharp drilling point tip prevents the screw from slipping on the fixture surface.
- Self-vulcanising EPDM sealing washer.
- Temperature variation and UV resistant. Thanks to the special washer shape, the sealing material adheres properly to the outer fixture lining which guarantees efficient joint sealing.

APPLICATIONS

- For fixing of: Composite panels to cold-formed steel structures

BASE MATERIALS

- Approved for use in:**
- Structural Steel



APPROVALS AND REPORTS

- ETA-17/0518



Size	Rawplug code	Screw			Head size	Thickness of sandwich panels [mm]	Quantity		
		Diameter		Length			Box	Outer	Pallet
		d1	d						
5.0	R-OCR-55/63090A19	6.3	5.5	90	8	35-70	100	800	25600
	R-OCR-55/63110A19	6.3	5.5	110	8	50-90	100	800	25600
	R-OCR-55/63125A19	6.3	5.5	125	8	55-105	100	800	25600
	R-OCR-55/63150A19	6.3	5.5	150	8	70-130	100	800	25600
	R-OCR-55/63175A19	6.3	5.5	175	8	90-135	100	800	25600
	R-OCR-55/63200A19	6.3	5.5	200	8	110-118	100	800	25600
	R-OCR-55/63230A19	6.3	5.5	230	8	150-210	100	-	28800
	R-OCR-55/63275A19	6.3	5.5	275	8	180-255	100	-	11200

R-ONR SELF-DRILLING SCREWS FOR COMPOSITE PANELS, MAX 12MM

Drilling point of specially designed aggressive profile ensuring quick and effortless fixing to hot-rolled steel substrates



FEATURES AND BENEFITS

- Coloured protective polyester coating of 45-50 µm in thickness (RAL, NCS, RR) ensuring additional corrosion protection and perfectly matching the steel decking colour. UV stabilisers guarantee colour stability over a long service life.
- Surface-hardened thread (combined with a core which maintains flexibility). Zinc coating of at least 12 µm in thickness for improved corrosion protection.
- Thread profile and length directly linked with the self-drilling fastener's intended use for fixing composite panels to steel structures.
- Two types of thread: one is intended for fixing to steel structures, and the other one directly under the screw head, having a higher pitch, protects the outer panel lining against dents and helps in sealing the joint.
- Drilling point of specially designed aggressive profile ensuring quick and effortless fixing to steel substrates. It allows you to complete drilling, tapping and fixing of elements together in one go. The sharp drilling point tip prevents the screw from slipping on the fixture surface.
- Self-vulcanising EPDM sealing washer.
- Temperature variation and UV resistant. Thanks to the special washer shape, the sealing material adheres properly to the outer fixture lining which guarantees efficient joint sealing.

APPLICATIONS

- For fixing of: Composite panels to thick wall hot rolled steel sections
- For fixing of: Composite panels to cold formed sections structures

BASE MATERIALS

- Approved for use in:**
- Hot-rolled steel section
 - Cold-rolled steel section



APPROVALS AND REPORTS

- ETA-17/0518



R-ONR SELF-DRILLING SCREWS FOR COMPOSITE PANELS, MAX 12MM (cont.)

Size	Rawplug code	Screw			Head size	Thickness of sandwich panels [mm]	Quantity		
		Diameter		Length			Box	Outer	Pallet
		d1	d						
5.0	R-ONR-55/63101A19	6.3	5.5	101	8	20-70	100	800	25600
	R-ONR-55/63121A19	6.3	5.5	121	8	35-90	100	800	25600
	R-ONR-55/63141A19	6.3	5.5	141	8	55-110	100	800	25600
	R-ONR-55/63161A19	6.3	5.5	161	8	75-125	100	800	25600
	R-ONR-55/63191A19	6.3	5.5	191	8	105-160	100	800	25600
	R-ONR-55/63211A19	6.3	5.5	211	8	125-180	100	800	25600
	R-ONR-55/63241A19	6.3	5.5	241	8	250-310	100	100	28800
	R-ONR-55/63261A19	6.3	5.5	261	8	175-230	100	100	11200
	R-ONR-55/63291A19	6.3	5.5	291	8	200-260	100	100	11200
R-ONR-55/63341A19	6.3	5.5	341	8	250-310	100	100	11200	

R-ORR SELF-DRILLING SCREWS FOR COMPOSITE PANELS, MAX 18MM

Special zinc flake corrosion-resistant coating for highly effective protection




R-ORR

FEATURES AND BENEFITS

- Hardened screw's thread surface. High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles.
- Coloured polyester protective coating with a thickness of 45-50 um (RAL, NCS, RR), provides additional protection against corrosion. Various colours available to suit all metal sheet variants. UV stabilizers ensure colour quality over a long period of use.
- The shape of the thread and its height is designed for applications into sandwich panels and steel construction.
- Two types of threads: one designed for mounting into a steel structure, second under head thread, prevents external panel dents and helps to seal the connection.
- Self vulcanizing EPDM washer. Temperature and UV resistant. The special shape of the washer ensures proper seating of the sealing material on the outer cladding material fixture which guarantees a proper seal.
- Special zinc flake corrosion-resistant coating for anti-corrosion protection.

APPLICATIONS

- Composite panels to thick wall hot rolled steel sections



BASE MATERIALS

- Approved for use in:**
- Hot-rolled steel section

APPROVALS AND REPORTS

- ETA-17/0518



Size	Rawplug code	Screw			Head size	Thickness of sandwich panels [mm]	Quantity		
		Diameter		Length			Box	Outer	Pallet
		d1	d						
6.3	R-ORR-63/70109A19	7.0	6.3	109	8	40-70	100	100	28800
	R-ORR-63/70129A19	7.0	6.3	129	8	45-90	100	100	28800
	R-ORR-63/70149A19	7.0	6.3	149	8	65-110	100	100	28800
	R-ORR-63/70169A19	7.0	6.3	169	8	80-130	100	100	28800
	R-ORR-63/70179A19	7.0	6.3	179	8	95-140	100	100	28800
	R-ORR-63/70199A19	7.0	6.3	199	8	110-160	100	100	28800
	R-ORR-63/70219A19	7.0	6.3	219	8	135-180	100	100	28800
	R-ORR-63/70249A19	7.0	6.3	249	8	165-210	100	100	11200
	R-ORR-63/70259A19	7.0	6.3	259	8	170-220	100	100	11200
	R-ORR-63/70269A19	7.0	6.3	269	8	180-230	100	100	11200
	R-ORR-63/70309A19	7.0	6.3	309	8	210-260	100	100	11200

R-OTR SELF-DRILLING SCREWS FOR COMPOSITE PANELS TO CONCRETE AND TIMBER

Special double thread type HiLo with cuts for drilling in wood and for embedding in concrete after pre-drilling.



FEATURES AND BENEFITS

- Hardened screw's thread surface. High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles.
- Shape of the tip facilitating correct turning and allowing penetration in wood and concrete.
- The shape and type of screw's thread is designed specifically for connecting to concrete and wood. The drill point is designed to provide a fast and hassle-free installation. Sharp point of the drill prevents movement of the surface of the fixture.
- Special zinc flake coating for increased corrosion resistance.
- Self vulcanizing EPDM washer. Temperature and UV resistant. The special shape of the washer ensures proper seating of the sealing material on the outer cladding material fixture which guarantees a proper seal.
- Two type of thread : first for fixing in the ground, second with a larger pitch under the head protects against indentation of the outer cladding of the board and helps in sealing the connection.

APPLICATIONS

- Fixing of composite curtain wall cladding to concrete structures
- Fixing of composite curtain wall cladding to wooden structures
- Fixing of composite roofing panels to concrete structures
- Fixing of composite roofing panels to wooden structures


BASE MATERIALS

- Approved for use in:**
- Concrete C20/25
 - Wood
 - Timber



APPROVALS AND REPORTS

- ETA-17/0518
- ITB-KOT-2017/0135

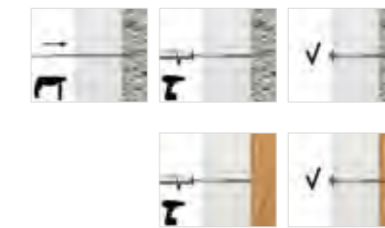

Size	Rawplug code	Screw			Washer size	Drill diameter - concrete	Fixture		Quantity			
		Diameter		Length			Head size	Maximum thickness of el. mounted with washer - wood	Maximum thickness of el. mounted with washer - concrete	Box	Outer	Pallet
		d1	d									
6.3	R-OTR-63/70095A19	7.0	6.3	95	8	19	5,0	30-55	40-65	100	100	28800
	R-OTR-63/70115A19	7.0	6.3	115	8	19	5,0	50-70	60-80	100	100	28800
	R-OTR-63/70135A19	7.0	6.3	135	8	19	5,0	70-90	80-100	100	100	28800
	R-OTR-63/70155A19	7.0	6.3	155	8	19	5,0	90-110	100-120	100	100	28800
	R-OTR-63/70185A19	7.0	6.3	185	8	19	5,0	110-140	120-150	100	100	28800
	R-OTR-63/70205A19	7.0	6.3	205	8	19	5,0	145-160	155-170	100	100	28800
	R-OTR-63/70235A19	7.0	6.3	235	8	19	5,0	170-200	180-200	100	100	28800
	R-OTR-63/70255A19	7.0	6.3	255	8	19	5,0	190-210	200-220	100	100	11200



” Construction Bolts

HV High-Strength Structural Bolting Assemblies
for Preloading **163**

SB Non-Preloaded Structural Bolting Assemblies **170**

RAWLPLUG®

100 YEARS OF EXPERTISE IN FIXINGS, FASTENERS AND TOOLS

RELIABLE and SAFE JOINT

Special coating that reduces dirt with molybdenum disulphide

Property grade 8.8 and 10.9 (Heat treatment process according to automotive specification CQI-9)

The only proposition of assembly torque on the market for SB (SELF-LOCK)

High fatigue resistance due to lack of ferrite delta

Hot dip galvanization (additionally process in accordance with Deutscher Schraubenverband e.V. requirements)

Full support from the manufacturer in developing assembly methods

Defined and controlled friction properties

Full product traceability

Suitable for preloading according to **DAST - Richtlinie 024 / DIN EN 1993-1-8/NA**

Suitable for preloading according to EN 1090-2
K-class: **K1 $0.10 \leq k \leq 0.16$**
K-class: **K2 $0.10 \leq km \leq 0.23$; $Vk \leq 0.06$**
and modified method acc. to
DAST - Richtlinie 024 / DIN EN 1993-1-8/NA

HV

SB

HV HIGH-STRENGTH STRUCTURAL BOLTING ASSEMBLIES FOR PRELOADING

HV Set (Bolt, Nut and Washers) acc. to EN 14399-4 and EN 14399-6



FEATURES AND BENEFITS

- The perfect selection of thread fit allows easy by hand assembly.
- Possibility to test bolted connections during assembly, tested according to EN 14399-2.
- The ERP system enables 100% product identification and easy access to test results.
- The unique formula of molybdenum disulphide guarantees compliance with the requirements of k-class K1 and K2. Limiting the dissolution of the coating in water and dirt.
- Transparent label of the product informing about the basic parameters of the product and values required for assembly.
- The strength of the HV and SB sets is confirmed by the CQI-9 certificate
- Reduction of the risk of hydrogen embrittlement by acid-free pre-treatment before hot dip galvanizing.
- Customer support by a team of laboratories, assistance in the selection of assembly methods.
- The possibility of packing assembled sets thanks to the use of a semi-automatic machine.



CATEGORIES OF BOLTED CONNECTIONS

Shear connections:

- Category A: Bearing Type connections
- Category B: Slip-resistant at serviceability limit state
- Category C: Slip-resistant at ultimate limit state

Tension connections:


- Category D: non-preloaded
- Category E: preloaded

APPLICATIONS

- Halls
- Bridges
- Trading centres
- Roof constructions
- Internal building skeletons with large lateral spread
- Multi-level parkings
- Wind turbines

APPROVALS AND REPORTS

- DoP Number 2018/06/04/CPR/HV10.9
- Certificate no 0045-CPR-1145/2
- Certificate of Conformity EN 1090-2
- Certificate of Conformity EN 14399
- Certificate of Conformity EN 15048
- Certificate of Conformity IATF 16949
- Certificate of Conformity ISO 9001
- Certificate of Conformity ISO 14001
- Certificate of Conformity AD 2000



Size	Index	Thread	Length	Wrench S	Clamp length Σt	MA	Additional angle of rotation	Fv	Box	Pallet
			mm	mm	mm	Nm		kN	pcs	pcs
12	EN 14399-4 (HV) - M12x30 - 10.9 HDG	M12	30	22	11 - 16	70	60	59	100	12500
	EN 14399-4 (HV) - M12x35 - 10.9 HDG	M12	35	22	16 - 21	70	60	59	100	10000
	EN 14399-4 (HV) - M12x40 - 10.9 HDG	M12	40	22	21 - 26	70	60	59	100	10000
	EN 14399-4 (HV) - M12x45 - 10.9 HDG	M12	45	22	26 - 31	70	90	59	100	10000
	EN 14399-4 (HV) - M12x50 - 10.9 HDG	M12	50	22	31 - 36	70	90	59	100	7500
	EN 14399-4 (HV) - M12x55 - 10.9 HDG	M12	55	22	36 - 41	70	90	59	100	8500
	EN 14399-4 (HV) - M12x60 - 10.9 HDG	M12	60	22	41 - 46	70	90	59	50	7500
	EN 14399-4 (HV) - M12x65 - 10.9 HDG	M12	65	22	46 - 51	70	90	59	50	6250
	EN 14399-4 (HV) - M12x70 - 10.9 HDG	M12	70	22	51 - 56	70	90	59	50	7500
	EN 14399-4 (HV) - M12x75 - 10.9 HDG	M12	75	22	56 - 61	70	90	59	50	6250
	EN 14399-4 (HV) - M12x80 - 10.9 HDG	M12	80	22	61 - 66	70	90	59	50	6250
	EN 14399-4 (HV) - M12 x85 - 10.9 HDG	M12	85	22	66 - 71	70	90	59	50	6250
	EN 14399-4 (HV) - M12 x90 - 10.9 HDG	M12	90	22	71 - 76	70	120	59	50	6250
	EN 14399-4 (HV) - M12 x95 - 10.9 HDG	M12	95	22	76 - 81	70	120	59	50	6250
	EN 14399-4 (HV) - M12 x100 - 10.9 HDG	M12	100	22	81 - 86	70	120	59	50	5000
	EN 14399-4 (HV) - M12 x105 - 10.9 HDG	M12	105	22	86 - 91	70	120	59	50	5000

HV HIGH-STRENGTH STRUCTURAL BOLTING ASSEMBLIES FOR PRELOADING

Size	Nut				Washer			
	Index	Thread	Box	Pallet	Index	Hole diameter	Box	Pallet
			(pcs)	(pcs)		(mm)	(pcs)	(pcs)
12	EN 14399-4 (HV) -M12 -10Z HDG+MoS2	M12	200,0	20000	EN 14399-6 (HV)-300HV HDG -M12	13	200,0	44800
16	EN 14399-4 (HV) -M16 -10Z HDG+MoS2	M16	100,0	10000	EN 14399-6 (HV)-300HV HDG -M16	17	200,0	44800
20	EN 14399-4 (HV) -M20 -10Z HDG+MoS2	M20	100,0	7500	EN 14399-6 (HV)-300HV HDG -M20	21	200,0	20000
22	EN 14399-4 (HV) -M22 -10Z HDG+MoS2	M22	50,0	5100	EN 14399-6 (HV)-300HV HDG -M22	23	200,0	20000
24	EN 14399-4 (HV) -M24 -10Z HDG+MoS2	M24	50,0	3750	EN 14399-6 (HV)-300HV HDG -M24	25	200,0	25000
27	EN 14399-4 (HV) -M27 -10Z HDG+MoS2	M27	50,0	2550	EN 14399-6 (HV)-300HV HDG -M27	28	100,0	7500
30	EN 14399-4 (HV) -M30 -10Z HDG+MoS2	M30	50,0	2550	EN 14399-6 (HV)-300HV HDG -M30	31	100,0	7500
36	EN 14399-4 (HV) -M36 -10Z HDG+MoS2	M36	25,0	1 275	EN 14399-6 (HV)-300HV HDG -M36	36	100,0	6250

3 different types of HV bolt assembly packing:

- components packed in separate boxes (presented above)
- components packed in one box
- components assembled and packed in one box

HV SET ASSEMBLY METHODS

Tightening force $F_{p,C} = 0,7 * f_{yb} * A_s$

		M12	M16	M20	M22	M24	M27	M30	M36
A_s	mm ²	84,3	157	245	303	353	459	561	817
$F_{p,C}$	kN	59	110	172	212	247	321	393	572

1. Combined method – k-class K1 according to EN 1090-2


$0,10 \leq k \leq 0,23$
 $M_{t,1} = 0,125 * d * F_{p,C}$

First tightening step

		M12	M16	M20	M22	M24	M27	M30	M36
$0,75 M_{t,1} *$	MPa	70	170	320	440	560	820	1100	2000

* Values were rounded to facilitate the setting of the torque wrench in construction conditions.

Second tightening step

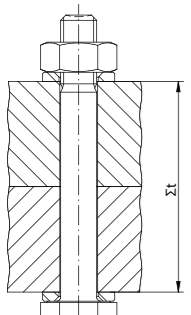The total nominal thickness Σt of the parts to be connected (containing all washers); d - nominal diameter of the bolt	Additional angle/part of rotation in the second tightening step	
 $\Sigma t < 2d$	Angle [°]	60
	Part of rotation [-]	1/6
$2d \leq \Sigma t \leq 6d$	Angle [°]	90
	Part of rotation [-]	1/4
$6d \leq \Sigma t \leq 10d$	Angle [°]	120
	Angle [°]	1/3

Example of calculation of the combined method.
For the M20 x 100 bolt with the value of the K-factor of 0.12.

First tightening step	Select from the first step table: 320 [Nm]
Second tightening step	For the M20 x 100 bolt, the value Σt is 73-78 [mm]
	$\Sigma t / d \rightarrow 73/20 = 3.65$ and $78/20 = 3.9$ hence $2d \leq \Sigma t \leq 6d$ Additional angle in the second tightening step is 90 [°].

HV HIGH-STRENGTH STRUCTURAL BOLTING ASSEMBLIES FOR PRELOADING

2. Torque method – k-class K2 according to EN 1090-2

$0,10 \leq k_m \leq 0,23$
 $V_k \leq 0,06$
 $M_{t,2} = k_m * d * F_{p,C}$

First tightening step	$0,75 * M_{t,2}$ [Nm]
Second tightening step:	$1,1 * M_{t,2}$ [Nm]
Example of calculation of the torque control method. For the M20 x 100 bolt with the value of $k_m 0,123$ and $V_k 0,048$.	
	$M_{t,2} = 0,123 * 20 * 172 = 422$ [Nm]
First tightening step	$0,75 * M_{t,2} = 316$ [Nm]
Second tightening step:	$1,1 * M_{t,2} = 464$ [Nm]

3. Modified method of controlled torque according to DAST - Richtlinie 024 / DIN EN 1993-1-8/NA

Required preload $F_{p,C} = 0,7 * f_{yb} * A_s$ [kN]

		M12	M16	M20	M22	M24	M27	M30	M36
$F_{p,C} *$	kN	50	100	160	190	220	290	350	510
First tightening step									
$0,75 * MA$	Nm	75	190	340	490	600	940	1240	2100
Second tightening step:									
MA	Nm	100	250	450	650	800	1250	1650	2800

In category B, C and E joints, the limit state of which depends on the value of the preload force $F_{p,C} = 0,7 * f_{yb} * A_s$, it is recommended to tighten the k-class K1 bolts by the combined method according to EN 1090-2. In other cases, a reduced value of the preload force $F_{p,C} = 0,7 * f_{yb} * A_s$ and a modified method of controlled tightening torque can be used.



SB NON-PRELOADED STRUCTURAL BOLTING ASSEMBLIES

CONTROLLED TORQUE ASSEMBLY – SB SET

1. Values of the predicted tensioning from using torque in steps 1 and 2

	M10	M12	M16	M20	M24
Step 1 [Nm] ^a	30	50	120	240	350
Step 2 [Nm] ^a	55	100	240	470	700
min. F _{p,c} [kN]	28	40	75	118	145

^a The values of the torques result from the obtained coefficient of friction in the tests, where the constant value of the abutment surface of the bolt was ensured.

1.1. Tightening – First step	<p>a) Set the key to the torque value provided in "Step 1" in Table 1. (e.g. for the M16 bolt it is 120 [Nm]).</p> <p>b) Step one of tightening must be carried out for all bolts in one connection before moving onto step two of tightening. Detailed information - see SB manual at www.klfs.pl.</p>
1.2. Tightening – Second step	<p>a) Set the key to the torque value provided in "Step 2" in Table 1 (e.g. for the M16 bolt it is 240 [Nm]).</p> <p>b) Step one of tightening must be carried out for all bolts in one connection. Detailed information - see SB manual at www.klfs.pl.</p>

2. Torque and clamping force values based on standard requirements DAST- Richtlinie 024/DIN EN 1993-1-8/ NA.

	M10	M12	M16	M20	M24
Step [Nm] ^a	45	85	225	440	715
min. F _{p,c} * [kN] ^b	22	35	70	110	150

^a The values of the torques result from the obtained coefficient of friction in the tests, where the constant value of the abutment surface of the bolt was ensured.

^b reduced value of the preload force F_{p,c}=0,7*f_{yb}*A_s and a modified method of controlled tightening torque can be used.

Repeatability of assembly

<p>Torque too low, No adhesion of the joined elements</p> <p>X</p>	<p>Torque too high, Deformation of the bolt and connected elements</p> <p>X</p>	<p>The torque specified by the manufacturer, Connection stability</p> <p>V</p>
---	--	---

Increasing the self-locking of the nut thread


<p>Incorrectly selected assembly torque, shear stresses and risk of loosening the nut</p> <p>X</p>	<p>A well-chosen assembly moment, ensured connection rigidity and self-locking of the thread</p> <p>V</p>
---	--

HV/SB CONSTRUCTION BOLTS

Categories of bolted connections

Shear connections			Tension connections	
A (Bearing type)	B (Slip-resistant at serviceability)	C (Slip-resistant at ultimate)	D (Non-preloaded)	E (Preloaded)
$F_{v,Ed} \leq F_{v,Rd}$ $F_{t,Ed} \leq F_{t,Rd}$	$F_{v,Ed,ser} \leq F_{v,Rd,ser}$ $F_{t,Ed,ser} \leq F_{t,Rd,ser}$ $F_{v,Ed} \leq F_{v,Rd}$ $F_{t,Ed} \leq F_{t,Rd}$	$F_{v,Ed} \leq F_{v,Rd}$ $F_{t,Ed} \leq F_{t,Rd}$ $F_{v,Ed} \leq N_{net,Rd}$	$F_{t,Ed} \leq F_{t,Rd}$ $F_{p,Ed} \leq F_{p,Rd}$	$F_{t,Ed} \leq F_{t,Rd}$ $F_{p,Ed} \leq F_{p,Rd}$
No preloading required. Bolt classes from 4.6 to 10.9 may be used.	Preloaded 8.8 or 10.9 bolts should be used. Slip resistance in the serviceability limit state.	Preloaded 8.8 or 10.9 bolts should be used. Slip resistance in the ultimate limit state.	No preloading required. Bolt classes from 4.6 to 10.9 may be used.	Preloaded 8.8 or 10.9 bolts should be used.
HV & SB	HV	HV	HV & SB	HV

- F_{v,Ed} is the design shear force per bolt for the ultimate limit state;
- F_{v,Rd} is the design shear resistance per bolt;
- F_{b,Rd} is the design bearing resistance per bolt;
- F_{v,Ed,ser} is the design shear force per bolt for the serviceability limit state;
- F_{s,Rd,ser} is the design slip resistance per bolt at the serviceability limit state;
- F_{s,Rd} is the design slip resistance per bolt at the ultimate limit state;
- N_{net,Rd} the design plastic resistance of the net cross-section at bolt holes
- F_{t,Ed} is the design tensile force per bolt for the ultimate limit state;
- F_{t,Rd} is the design tension resistance per bolt;
- B_{p,Rd} is the design punching shear resistance of the bolt head and the nut

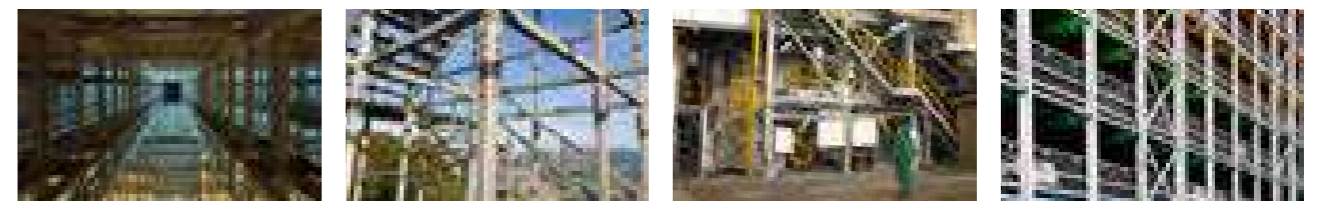



” Bonded Anchors

Overview of bonded anchors	182
Bonded anchors installation	184
R-KEX II pure epoxy resin	187
Hybrid resin	188
R-KER-II / R-CFS+KER-II hybrid resin	188
Vinylester resin	189
R-KER / R-CFS+RV200 vinylester resin	189
Poliester resin	191
R-KEM II styrene free polyester resin	191
R-KF2 polyester resin with styrene	192
Resin in capsules	193
R-CAS-V spin-in capsule	193
R-HAC-V hammer-in capsule	193
R-STUDS metric threaded rods	194
Bonded anchors accessories	197

SOLID WALLS

UNIVERSAL




R-KEX-II

PURE EPOXY RESIN

Premium pure epoxy resin 3:1 approved for use in cracked and non-cracked concrete.




REBAR



BARRIERS




PLATFORMS



R-KER-II
R-CFS+R-KER-II

HIGH PERFORMANCE HYBRID RESIN

Approved for 3 types of hole cleaning (including use of dustless drill bit).




STEELWORK



FORMWORK



CURTAIN WALLING




R-KER
R-CFS+RV200

STYRENE FREE VINYLESTER RESIN

High performance vinylester resin approved for use in cracked and non-cracked concrete.



BALUSTRADING



CONDUITS



SAFETY BARRIERS




R-CAS-V
R-HAC-V

GLASS CAPSULES

R-CAS-V - High performance, quick setting resin fixing for concrete.
R-HAC-V - Heavy duty anchor simply installed by hammering the stud.





CLADDING



LIFTS & ESCALATORS




TEMPORARY WORK



R-KEM-II
R-CFS+RM50

STYRENE FREE POLYESTER RESIN


Suitable for use in non-cracked concrete and wide range of solid or hollow masonry structures. ETA for 15 substrates.



BATHROOM FITTINGS



AWNINGS



GATES



BONDED ANCHORS

EFFICIENCY IN THE MOST DEMANDING ENVIRONMENTS



Use the e-learning training or sign up for our hands-on training.

- Bonded anchors - general characteristics and applications
- Bonded anchors - general information - base materials
- Bonded anchors - general information - rods
- Bonded anchors - general information - temperature
- Bonded anchors - product installation
- Bonded anchors - characteristic of product R-KER-II

Overview of our range



		R-KEX-II				R-KER-II R-CFS+RV200			
RESIN		PURE EPOXY				HYBRID RESIN			
SYSTEM OF BONDED ANCHORS		threaded rods	internally threaded anchors	rebar as an anchor	post-installed rebar	threaded rods	internally threaded anchors	rebar as an anchor	post-installed rebar
ANCHOR MATERIAL	5.8 STEEL CLASS, ZINC PLATED	✓	-	-	-	✓	-	-	-
	8.8 STEEL CLASS, ZINC PLATED	✓	-	-	-	✓	-	-	-
	STAINLESS STEEL	✓	-	-	-	✓	-	-	-
	REBAR	-	-	✓	✓	-	-	✓	✓
	R-ITS INTERNALLY THREADED ANCHOR	-	✓	-	-	-	✓	-	-
SUBSTRATES	CONCRETE	✓	✓	✓	✓	✓	✓	✓	✓
	CRACKED CONCRETE	✓	-	✓	✓	✓	✓	✓	✓
	SILICATE BRICK	-	-	-	-	-	-	-	-
	SOLID BRICK	-	-	-	-	-	-	-	-
	HOLLOW BRICK	-	-	-	-	-	-	-	-
	LIGHTWEIGHT CONCRETE BLOCKS	-	-	-	-	-	-	-	-
	AERATED CONCRETE BLOCKS	-	-	-	-	-	-	-	-
APPROVALS	ETA CE	✓ Option 1	✓ Option 7	✓ Option 1	✓ ETA	✓ Option 1	✓ Option 1	✓ Option 1	✓ ETA
	SEISMIC	✓	-	✓	-	✓	-	✓	-
	FIRE RESISTANT	-	-	-	✓	✓	-	✓	✓
DESIGN TENSION LOADS IN kN	[kN]	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}
	10	M8	M6	Ø8	Ø8	M8	M6	Ø8	Ø8
	20								
	30								
	40		M16				M16		
	50								
	60								
	70								
	80								
	90								
	100								
	110								
	120								
	130							Ø32	
	140								
	150								
	160								
	170			Ø32	Ø32				Ø40
	180					M30			
	190								
	200								
210									
220									
230	M30								

Overview of our range



R-KER RV200				R-KEM II RM50		R-KF2	R-CAS-V	R-HAC-V	
VINYLESTER				POLYESTER STYRENE FREE			VINYLESTER GLASS CAPSULES		
threaded rods	ITS	rebar as an anchor	post-installed rebar	threaded rods in concrete	threaded rods in masonry	threaded rods	threaded rods	threaded rods	rebar as an anchor
✓	-	-	-	✓	✓	✓	✓	✓	-
✓	-	-	-	✓	✓	✓	✓	✓	-
✓	-	-	-	✓	✓	✓	✓	✓	-
-	-	✓	✓	-	-	-	-	-	✓
-	✓	-	-	-	-	-	-	-	-
✓	✓	✓	✓	✓	-	✓	✓	✓	✓
✓	-	-	✓	-	-	-	-	-	-
-	-	-	-	-	✓	-	-	-	-
-	-	-	-	-	✓	-	-	-	-
-	-	-	-	-	✓	-	-	-	-
-	-	-	-	-	✓	-	-	-	-
✓ Option 1	✓ Option 7	✓ Option 7	✓ ETA	✓ Option 7	✓ 001	✓ Option 7	✓ Option 7	✓ Option 7	✓ Option 7
-	-	-	-	-	-	-	-	-	-
-	-	-	✓						
N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}	N _{Rd}
M8	M6	Ø8	Ø8	M8	M8-M16	M8	Ø8	M8	Ø8
	M16				M16				
									Ø32
						M30			
M30								M30	
		Ø32							
			Ø32				Ø32		

3 METHOD OF BONDED ANCHORS INSTALLATION

EFFICIENCY IN THE MOST DEMANDING ENVIRONMENTS



4 STEPS OF BONDED ANCHORS INSTALLATION

DRILLING

FUNCTIONAL CATEGORY OF THE SUBSTRATE VS. TYPE OF DRILLING				
	A	B	C	D
RT-MAXH / RT-SDSH hollow drill bits Dustlessdrill intended for concrete	V	V		
Aggressor SDS plus drill bits for drilling in concrete	V	V		V
Rebardrill SDS and Turbodrill SDS drill bits intended mainly for drilling in reinforced concrete	V	V		V
Rawplug Brickdrill SDS drill bits for solid and hollow ceramic substrates		V	V	

CLEANING

3 METHODS FOR CLEANING THE HOLE		
DUSTLESS DRILL METHOD	PNEUMATIC METHOD	TRADITIONAL METHOD
Cleaning with the hollow drill bit Dustless-drill	Compressed air cleaning using the 2x2x2 method compressed air, brush, compressed air	Standard manual 4x4x4 cleaning blow pump x brush x blow pump

ANCHORING - RESIN INJECTION

1. NOZZLE			2. DISPENSER		
The mixer nozzle is responsible for complete mixing			The dispenser guarantees working comfort		
R-NOZ-KEX-II	R-NOZ-KER-II	R-NOZ	ELECTRICAL	PNEUMATIC	MANUAL

FIXTURE INSTALLATION

PROCESSING TIME	CURING TIME
The time after the resin has been mixed, when the rod should be installed	Also referred to as bonding time, is the time from the end of resin mixing until the resin hardens entirely and load is applied to the system

Resin consumption for bonded anchors

How to use the table? Example: for Cartridge 400 ml and Stud diameter M12?
For stud diameter (M12) = Embedment depth = 144; (12d); for 400 ml = 41 pcs

Cartridge size	Stud diameter		d	[mm]	M8	M10	M12	M16	M20	M24	M30
	Hole diameter in substrate										
	Embedment depth h _{min}	6d	[mm]	60	60	72	96	120	144	180	
		8d	[mm]	64	80	96	128	160	192	240	
		10d	[mm]	80	100	120	160	200	240	300	
		12d	[mm]	96	120	144	192	240	288	360	
		16d	[mm]	128	160	192	256	320	384	480	
175ml	Quantity of anchored studs for depth	6d	pcs	65	49	33	17	6.7	4.4	2.3	
		8d	pcs	62	38	25	13	5.1	3.4	1.7	
		10d	pcs	51	31	21	10	4.1	2.7	1.4	
		12d	pcs	43	26	17	9.2	3.5	2.3	1.2	
		16d	pcs	33	20	13	7	2.6	1.7	0.9	
300ml	Quantity of anchored studs for depth	6d	pcs	112	84	57	29	11.5	7.6	4	
		8d	pcs	106	66	44	23	8.8	5.8	3	
		10d	pcs	87	54	36	18	7.1	4.7	2.4	
		12d	pcs	74	46	30	15.9	6	4	2	
		16d	pcs	57	35	23	12.1	4.5	3	1.5	
345ml	Quantity of anchored studs for depth	6d	pcs	129	97	65	34	13.2	8.8	4.6	
		8d	pcs	122	76	51	26	10.1	6.7	3.5	
		10d	pcs	100	62	41	21	8.2	5.4	2.8	
		12d	pcs	85	53	35	18.2	6.9	4.6	2.3	
		16d	pcs	65	40	27	13.9	5.2	3.4	1.7	
380ml	Quantity of anchored studs for depth	6d	pcs	142	107	72	37	14.6	9.7	5	
		8d	pcs	135	83	56	29	11.1	7.4	3.8	
		10d	pcs	111	68	46	23	9	6	3.1	
		12d	pcs	94	58	38	20.1	7.6	5	2.6	
		16d	pcs	72	44	29	15.3	5.7	3.8	1.9	
385ml	Quantity of anchored studs for depth	6d	pcs	144	108	73	38	14.8	9.8	5.1	
		8d	pcs	136	85	57	29	11.3	7.5	3.9	
		10d	pcs	112	69	46	24	9.2	6.1	3.1	
		12d	pcs	95	59	39	20.4	7.7	5.1	2.6	
		16d	pcs	73	45	30	15.5	5.8	3.8	2	
400ml	Quantity of anchored studs for depth	6d	pcs	150	113	76	39	15.3	10.2	5.3	
		8d	pcs	142	88	59	30	11.7	7.8	4	
		10d	pcs	117	72	48	25	9.5	6.3	3.2	
		12d	pcs	99	61	41	21.2	8	5.3	2.7	
		16d	pcs	76	47	31	16.1	6	4	2	
410ml	Quantity of anchored studs for depth	6d	pcs	154	116	77	40	15.7	10.5	5.4	
		8d	pcs	145	90	60	31	12	8	4.1	
		10d	pcs	119	74	49	25	9.7	6.5	3.3	
		12d	pcs	101	63	42	21.7	8.2	5.4	2.8	
		16d	pcs	78	48	32	16.5	6.2	4.1	2.1	
600ml	Quantity of anchored studs for depth	6d	pcs	225	169	114	59	23	15.3	8	
		8d	pcs	213	132	88	46	17.6	11.7	6.1	
		10d	pcs	175	108	72	37	14.3	9.5	4.9	
		12d	pcs	149	92	61	31.8	12	8	4.1	
		16d	pcs	114	70	47	24.2	9.1	6	3.1	

R-KEX II PURE EPOXY RESIN

Premium pure epoxy resin approved for use in cracked and non-cracked concrete



FEATURES AND BENEFITS

- Approved for use with threaded rods for use in cracked and non-cracked concrete (EAD 330499-00-0601)
- Approved for use with post-installed rebars in concrete up to a depth of 2.5 m
- Suitable for use in dry and wet substrates including underwater
- Very high chemical resistance – suitable for applications exposed to influence of various agents (industrial or marine environment)
- Minimal shrinkage provides the option to use in diamond drilled holes and over-sized holes
- Extended bonding time ensures easy installation of metal components (up to 35 min in +20°C)
- For use in temperatures above 0°C
- Seismic category C1
- Diamond and hammer drilling
- Special mixer nozzle - allows for precise mixing of the product

APPROVALS AND REPORTS

- ETA-13/0455
- ETA-13/0585



Installation guide movie



R-KEX-II-600 R-KEX-II-385

R-KEX II with Threaded Rods



R-KEX II with Rebar as an Anchor/ with Post-Installed Rebar



R-KEX II with Sockets



Rawplug code	Volume ml	Recommended R-GUN		Quantity		
		manual	electrical	Box pcs	Outer pcs	Pallet pcs
R-KEX-II-385	385	R-GUN-MULTI	R-GUN-KEX600AKUDOSE	10	40	480
R-KEX-II-600	600	R-GUN-MULTI	R-GUN-KEX600AKUDOSE	7	7	441

R-KER-II / R-CFS+KER-II HYBRID RESIN

NEW PRODUCT

High resistance hybrid resin approved for use in cracked and non-cracked concrete




R-KER-II

FEATURES AND BENEFITS

- Approved for use with threaded rods in cracked and non-cracked concrete
- Approved for use with post-installed rebars in concrete up to a depth of 1.5 m
- Suitable for use in dry or wet substrates and water filled holes
- Tests in fire conditions confirm the fire resistance of anchors and reinforcing bars
- Approved for 3 types of hole cleaning (including use of dustless drill bit)
- Special nozzle with longer mixer for more comfortable and precise application
- It is possible to use the winter or summer version to slow or rapid the resin curing time
- Suitable for multiple use. Partly used product can be reused after fitting new nozzle
- Very high load capacity
- Seismic category C1

APPROVALS AND REPORTS

- ETA-17/0594
- ETA-17/0874



Installation guide movie

BASE MATERIALS

- Approved for use in:**
- Cracked concrete C20/25-C50/60
 - Non-cracked concrete C20/25-C50/60

Approved for use with Post Installed Rebar in:

- Concrete C12/15 - C50/60



APPLICATIONS

- Curtain walling
- Balustrading
- Handrails
- Canopies
- Cable conduits and trays
- Fencing & gates manufacturing and installation
- Pipework/ductwork supports
- Platforms
- Pipelines systems
- Passenger lifts
- Safety barriers
- Formwork support systems



R-KER II-300 R-KER II-345 R-KER II-400 R-CFS+KER-II 600

Traditional method with blow pump and brush (4x, 4x,4x)




Method with Dustlessdrill Bit

Method with compressed air (2x, 2x, 2)



R-KER-II with Threaded Rods



R-KER-II with Rebar as an Anchor/with Post-Installed Rebar




R-KER-II with Sockets




R-KER-II / R-CFS+KER-II HYBRID RESIN (cont.)

R-KER-II with Threaded Rods



R-KER-II with Rebar as an Anchor/with Post-Installed Rebar




R-KER-II with Sockets



Rawplug code	Packaging	Version	Volume ml	Recommended R-GUN		Quantity		
				manual	electrical	Box pcs	Outer pcs	Pallet pcs
R-KER II-300	cartridge	standard	300	R-GUN-MULTI	-	10	10	840
R-KER II-345	cartridge	standard	345	R-GUN-345-N	-	10	10	840
R-KER-II-400	cartridge	standard	400	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-KER-II-300-S	cartridge	summer	300	R-GUN-MULTI	-	10	10	840
R-KER-II-400-S	cartridge	summer	400	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-KER II-300-W	cartridge	winter	300	R-GUN-MULTI	-	10	10	840
R-KER II-345-W	cartridge	winter	345	R-GUN-345-N	-	10	10	840
R-KER-II-400-W	cartridge	winter	400	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-CFS+KERII-600	foil	standard	600	R-CFS+GUN-600	R-CFS-GUN-600-AKU	1	8	36
R-CFS+KERII-600-S	foil	summer	600	R-CFS+GUN-600	R-CFS-GUN-600-AKU	1	1	36

R-KER / R-CFS+RV200 VINYLESTER RESIN

High performance vinylester resin approved for use in cracked and non-cracked concrete

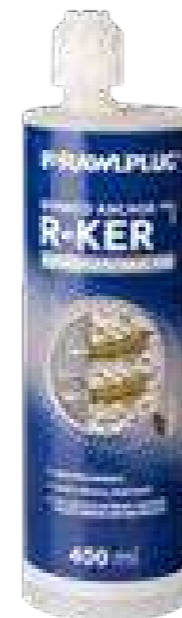

R-KER

FEATURES AND BENEFITS

- Approved for use with threaded rods in cracked and non-cracked concrete
- Approved for use with post-installed rebars in concrete
- Suitable for use in dry or wet substrates and water filled holes
- Winter version can be used for faster curing
- Special nozzle with longer mixer for more comfortable and precise application
- Suitable for multiple use. Partly used product can be reused after fitting new nozzle
- Very high load capacity

APPROVALS AND REPORTS

- ETA-10/0055
- ETA-13/0805
- ETA-12/0319



Installation guide movie

BASE MATERIALS

- Approved for use in:**
- Cracked concrete C20/25-C50/60
 - Non-cracked concrete C20/25-C50/60

Approved for use with Post Installed Rebar in:

- Concrete C12/15 - C50/60



APPLICATIONS

- Curtain walling
- Balustrading
- Handrails
- Canopies
- Cable conduits and trays
- Fencing & gates manufacturing and installation
- Pipework/ductwork supports
- Platforms
- Pipelines systems
- Passenger lifts
- Safety barriers
- Formwork support systems
- Structural steelwork
- Street lamps

R-KER / R-CFS+RV200 VINYLESTER RESIN (cont.)



R-KER with Threaded Rods



R-KER with Rebar as an Anchor/ with Post-Installed Rebar



R-KER with Sockets




R-CFS+RV200 with Threaded Rods



R-CFS+RV200 with Rebar as an Anchor/ with Post-Installed Rebar



R-CFS+RV200 with Sockets



Rawplug code	Packaging	Version	Volume ml	Recommended R-GUN		Quantity		
				manual	electrical	Box pcs	Outer pcs	Pallet pcs
R-KER-300	cartridge	standard	300	R-GUN-MULTI	-	10	10	840
R-KER-345	cartridge	standard	345	R-GUN-345-N	-	10	10	840
R-KER-400	cartridge	standard	400	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-KER-300-W	cartridge	winter	300	R-GUN-MULTI	-	10	10	840
R-KER-400-W	cartridge	winter	400	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-CFS+RV200-4	foil	standard	300	R-CFS+GUN-600	R-CFS-GUN-600-AKU	1	8	96
R-CFS+RV200-600-8	foil	standard	600	R-CFS+GUN-600	R-CFS-GUN-600-AKU	1	1	36

R-KEM II / R-CFS+RM50 STYRENE FREE POLYESTER RESIN

BEST SELLER

Universal polyester (styrene free) resin - European Approval for 15 substrates



FEATURES AND BENEFITS

- The most convenient bonded anchor for general purpose use
- Approved for 15 substrates
- Quick, secure and simple installation
- Product with wide spectrum of use in the medium load capacity area
- Ideal for applications where mechanical anchors are not suitable
- Easy dosage thanks to patented self-opening system and use of manual or pneumatic gun
- Option of use standard manual silicone gun
- Suitable for multiple use. Partly used product can be reused after fitting new nozzle

APPROVALS AND REPORTS

- ETA-12/0394
- ETA-12/0528



BASE MATERIALS

- Approved for use in:**
- Non-cracked concrete C20/25-C50/60
 - Hollow Brick
 - Solid Brick
 - Hollow Sand-lime Brick
 - Solid Sand-lime Brick
 - Hollow Lightweight Concrete Block
 - Aerated Concrete Block

Also suitable for use in:

- Natural Stone (after site testing)



APPLICATIONS

- Consoles
- Staircases
- Gates
- High racking
- Canopies
- Sanitary appliances
- Steel constructions
- Railings/Handrails
- Ladders
- Cable trays
- Window elements
- Canopies

R-KEM II with Threaded Rods for concrete



R-KEM II with Threaded Rods for masonry



R-CFS+RM50 with Threaded Rods for concrete



R-CFS+RM50 with Threaded Rods for masonry



R-KEM II STYRENE FREE POLYESTER RESIN (cont.)

Rawplug code	Packaging	Version	Volume ml	Recommended R-GUN		Quantity		
				manual	electrical	Box pcs	Outer pcs	Pallet pcs
R-KEM-II-175	cartridge	standard	175	R-GUN-MULTI	-	10	50	600
R-KEM-II-300	cartridge	standard	300	R-GUN-MULTI	-	10	50	600
R-KEM-II-410	cartridge	standard	410	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-KEM-II-300-S	cartridge	summer	300	R-GUN-MULTI	-	10	50	600
R-KEM-II-175-W	cartridge	winter	175	R-GUN-MULTI	-	10	50	600
R-KEM-II-300-W	cartridge	winter	300	R-GUN-MULTI	-	10	50	600
R-KEM-II-300-STONE	cartridge	-	300	R-GUN-MULTI	-	10	50	600
R-KEM-II-410-STONE	cartridge	-	410	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-KEM-II-300-GREY	cartridge	-	300	R-GUN-MULTI	-	10	50	600
R-KEM-II-410-GREY	cartridge	-	410	R-GUN-MULTI	R-GUN-380-AKUDOSE	10	10	560
R-KEM-II-175-SET	cartridge	set	175	R-GUN-MULTI	-	5	5	315
R-KEM-II-300-SET	cartridge	set	300	R-GUN-MULTI	-	5	5	315
R-KEM-II-300-P2G6N	cartridge	-	300	R-GUN-MULTI	-	1	2	112
R-KEM-II-300-P2GUN	cartridge	set	300	R-GUN-MULTI	-	-	5	200
R-CFS+RM50-4	foil	standard	300	R-CFS+GUN-600	R-CFS+GUN-600-AKU	1	12	108
R-CFS+RM50-600-8	foil	standard	600	R-CFS+GUN-600	R-CFS+GUN-600-AKU	1	1	36

R-KF2 POLYESTER RESIN WITH THREADED RODS

Economy polyester resin approved for use in non-cracked concrete



FEATURES AND BENEFITS

- Economical fixings resin for medium duty load applications
- Can be used in damp conditions
- Wide range of steel studs with different lengths and diameters
- Small edge and spacing distances
- Suitable for repetitive use. Partly used product can be reused by fitting a new mixing nozzle

APPROVALS AND REPORTS

- ETA-11/0141



BASE MATERIALS

Approved for use in:

- Non-cracked concrete C20/25-C50/60



APPLICATIONS

- Guard rails
- Handrails
- Canopies
- Masonry support
- Balustrading
- Cable trays
- Curtain walling
- Fencing & gates manufacturing and installation

R-KF2 with Threaded Rods



Rawplug code	Volume ml	Recommended R-GUN		Quantity		
		manual	electrical	Box pcs	Outer pcs	Pallet pcs
R-KF2-300	300	R-GUN-MULTI	-	10	10	840
R-KF2-380	380	R-GUN-MULTI	R-GUN-380-ADUDOSE	10	40	480

R-CAS-V SPIN-IN CAPSULE

High-performance, quick-setting, styrene-free vinylester resin for concrete



FEATURES AND BENEFITS

- Approved for use with threaded rods in non-cracked concrete (ETAG001 Option 7)
- High performance for use safety critical application - heavy-duty fastenings with small spacing and edge distances
- The system relies on the adhesion between the concrete and resin, which is free from expansion forces. This makes it an ideal choice where close edge and spacing distances are required
- Capsule contains precise amounts of ingredients making it a very consistent product
- Adhesive strength is not affected by unpolluted water
- Suitable for dry or wet non-cracked concrete
- Styrene free - odourless

APPLICATIONS

- Threaded rods
- Balustrading
- Railings
- Heavy machinery
- Structural steel
- Steel columns
- Cladding restraints
- Curtain walling
- Fencing & gates manufacturing and installation
- Formwork support systems
- Garage doors
- Guard rails

BASE MATERIALS

Approved for use in:

- Non-cracked concrete C20/25-C50/60

Also suitable for use in:

- Natural Stone (after site testing)




APPROVALS AND REPORTS

- ETA-10/0108



Installation guide movie

R-CAS-V with Threaded Rods



Code	Capsule size	Drill / hole diameter	Rods / rebar diameter	Quantity		
				Box pcs	Outer pcs	Pallet pcs
R-CAS-V-08	8	10	8	10	480	8000
R-CAS-V-10	10	12	10	10	480	5760
R-CAS-V-12	12	14	12	10	480	5760
R-CAS-V-16	16	18	16	10	480	6000
R-CAS-V-20	20	24	20	6	144	960
R-CAS-V-24	24	28	24	6	144	720
R-CAS-V-30	30	35	30	4	32	384

R-HAC-V HAMMER-IN CAPSULE

Heavy duty anchor with small spacing and edge distances, simply installed by hammering the threaded rods



FEATURES AND BENEFITS

- High performance anchor, for use in safety critical applications
- The system relies on the adhesion between concrete and resin, which is free from expansion forces. This makes it an ideal choice where close edge and spacing distances are required
- Capsule contains precise amounts of ingredients making it a very consistent product
- Adhesive bond strength is not affected by unpolluted water
- Suitable for dry or wet non-cracked concrete
- Low cost tooling required for installation, quick and easy to install
- Styrene free - virtually odourless
- Approved for use with threaded rods in non-cracked concrete (ETAG001 Option 7)

APPLICATIONS

- Balustrading & handrails
- Cable trays
- Guard rails
- Heavy machinery
- Threaded rods
- Cladding restraints
- Curtain walling
- Fencing & gates manufacturing and installation
- Reinforcement bars

BASE MATERIALS

Approved for use in:

- Non-cracked concrete C20/25-C50/60

Also suitable for use in:

- Natural Stone (after site testing)



APPROVALS AND REPORTS


- ETA-11/0002



Installation guide movie

R-BRUSH MANUAL AND AUTOMATIC WIRE BRUSHES


Brush accessory for cleaning out holes prior to anchor installation

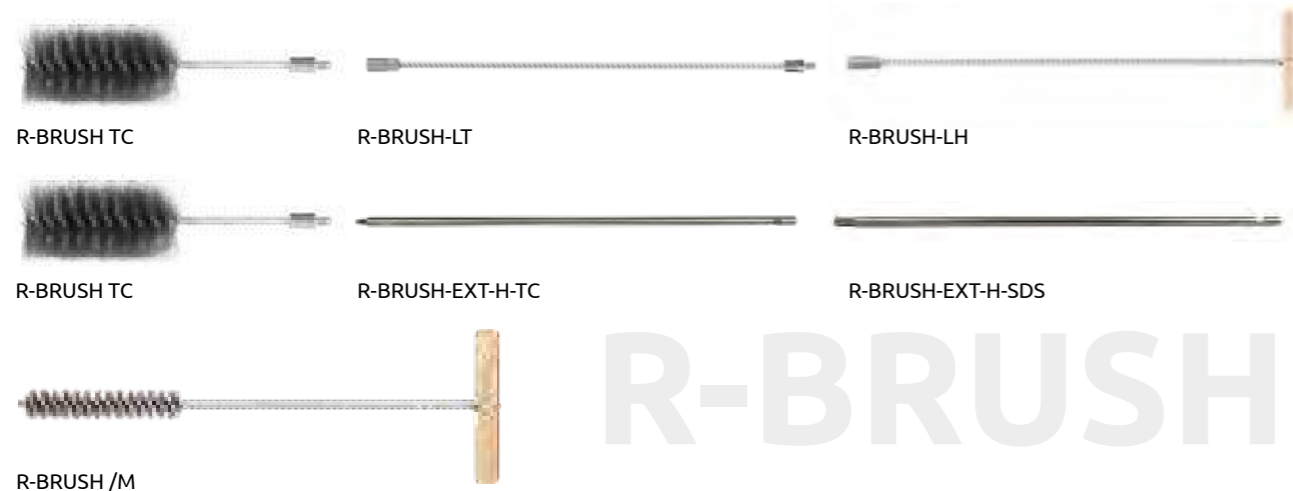

R-BRUSH

FEATURES AND BENEFITS


- Ideal for cleaning dust from drilled holes prior to applying bonded anchors or installing mechanical anchors
- Hole cleaning is necessary for correct loads
- Suitable for variable anchor embedment depths up to 2,5 m
- Suitable for repetitive and frequent use.
- Ideal for serial cleaning of deep holes.

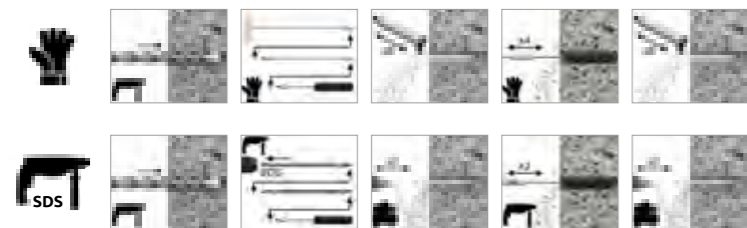

Rawplug code	Brush diameter [mm]	Drill diameter [mm]	Length [mm]	Quantity [pcs]		
				Box	Outer	Pallet
Extension for manual cleaning R-BRUSH with threaded coupling						
R-BRUSH-EXT-LH	-	-	360	1	1	-
R-BRUSH-EXT-LT	-	-	360	1	1	-
Extension for machine cleaning R-BRUSH with threaded coupling						
R-BRUSH-EXT-H-TC	-	-	420	1	30	-
R-BRUSH-EXT-H-SDS	-	-	420	1	30	-
Wire brush with threaded coupling for manual and machine cleaning						
R-BRUSH-12-TC	12	10	200	1	1	-
R-BRUSH-14-TC	14	12	200	1	1	-
R-BRUSH-16-TC	16	14	200	1	1	-
R-BRUSH-18-TC	18	16	200	1	1	-
R-BRUSH-20-TC	20	18	200	1	1	-
R-BRUSH-22-TC	22	20	200	1	1	-
R-BRUSH-27-TC	27	24	200	1	1	-
R-BRUSH-32-TC	32	28	200	1	1	-
R-BRUSH-37-TC	37	35	200	1	1	-
R-BRUSH-42-TC	42	40	200	1	1	-
R-BRUSH-52-TC	52	50	200	1	1	-
Wire brushes						
R-BRUSH-M08/M	12	10	140	1	10	300
R-BRUSH-M10/M	14	12	140	1	10	500
R-BRUSH-M12/M	16	14	240	1	10	500
R-BRUSH-M16/M	20	18	240	1	10	400
R-BRUSH-M20/M	24	24	240	1	10	250
R-BRUSH-M24/M	30	28	240	1	10	250
R-BRUSH-M30/M	36	35	280	1	10	300

R-BLOWPUMP BLOW PUMP

Manual blow pump ideal for cleaning dust from drilled holes prior to applying bonded anchors or installing mechanical anchors

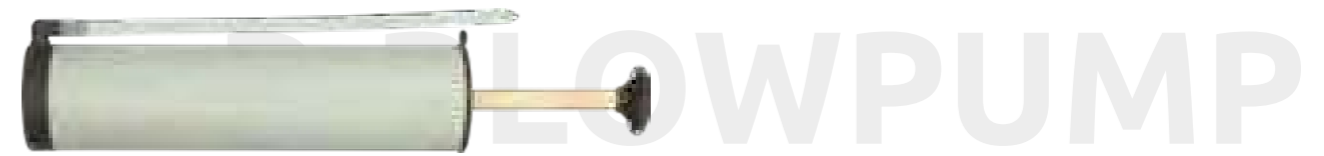

FEATURES AND BENEFITS

- Ideal for cleaning dust from drilled holes prior to applying bonded anchors or installing mechanical anchors
- Hole cleaning is necessary for correct loads
- Manual, easy to use
- Serial application

APPLICATIONS

- Accessory used for cleaning out anchoring holes in concrete and masonry



Rawplug code	Quantity [pcs]		
	Box	Outer	Pallet
R-BLOWPUMP	12	12	200

R-PLS / SP-CE MESH SLEEVES

Mesh sleeves for reduced mortar consumption and optimal mechanical interlock for masonry



Plastic Mesh Sleeves R-PLS

Wire Mesh Sleeves SP-CE

FEATURES AND BENEFITS

- Ensures that the anchor rod is properly centred.
- Reduces consumption of resin
- User-friendly installation in hollow substrates
- Size must be adjusted to the hole depth and diameter
- Hole cleaning is not necessary

APPLICATIONS

- For use with R-STUDS threaded rods in hollow base materials

BASE MATERIALS

Approved for use in:

- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab



Rawplug code	Size		Drill diameter [mm]	Quantity [pcs]		
	Tuleja [mm]	Pręt		Box	Outer	Pallet
R-PLS-12050-10	12x50	M8	12	10	700	8400
R-PLS-16085-10	16x85	M10-M12	16	10	500	6000
R-PLS-16130-10	16x130	M10-M12	16	10	400	4800
R-PLS-20085-10	20x85	M16	20	10	400	4800
SP-CE-R08	10X1000	M8	12	10	10	5430
SP-CE-R10	12x1000	M10	14	10	10	1500
SP-CE-R12	16x1000	M12	16	10	10	1300
SP-CE-R16	22x1000	M16	22	10	10	384
SP-CE-R20	28x1000	M20	28	5	5	280

R-NOZ MIXER NOZZLES

Static mixer for bonded anchors in cartridges and CFS+ system



R-NOZ-KEX-II



R-NOZ-KER-II



R-NOZ

R-NOZ

FEATURES AND BENEFITS

- Convenient extrusion and mixing of resin and hardener
- Available with or without hanger
- Ideal for serial applications: rebar or anchoring
- Specially dedicated nozzle fits for anchoring systems R-KEX-II, R-KER-II, R-KEM II
- Possibility of extension- attach SP-CE-ED-1m extension nozzle up to 2.5 m

APPLICATIONS

- For use in a wide range of fastening applications in concrete and solid masonry structures



Rawplug code	Suitable for	Length [mm]	Quantity		
			Box	Outer	Pallet
			pcs	pcs	pcs
R-NOZ-KEX-II-10	R-KEX-II	250	10	100	2400
R-NOZ-KEX-II-100	R-KEX-II	250	100	500	12000
R-NOZ-KER-II-10	R-KER-II	215	10	200	4800
R-NOZ-KER-II-100	R-KER-II	215	100	700	16800
R-NOZ-10	R-KEM-II, R-KF2, R-KER	200	10	200	4800
R-NOZ-100/100	R-KEM-II, R-KF2, R-KER	200	100	700	16800

NOZZLE EXTENSION

Elastic extension pipe for bonded anchors in cartridges and CFS+ system



R-NOZ-EXT

SP-CE-ED-1M

FEATURES AND BENEFITS

- **SP-CE-DE-1M** Rigid extension pipe used for cleaning deep holes starting from the bottom of the hole and dosing resin for deep anchoring
- **R-NOZ-EXT** An extension hose, making it possible to clean the hole uniformly, with no dust. To achieve this, the hose is connected to the compressor. Rawlplug offers extensions making it possible to clean over a length of up to 3 metres. It is important that the hoses can be conveniently cut to the required length.

APPLICATIONS

- Ensure thorough cleaning of the hole, with removal of all drill dust, to make sure the appropriate load capacity is achieved
- Can be used in holes of different depths
- Are suitable for repeated and frequent use together with the brushes they form an approved cleaning system
- Enables resin dosing in technology for deep anchoring (post installed rebar)


NOZZLE EXTENSION (cont.)

Rawplug code	Suitable for	Length [mm]	Quantity [pcs]	
			Box	Outer
SP-CE-ED-1M	Extension pipe for bonded anchors	1000	10	10
R-NOZ-EXT-200	Extension pipe for bonded anchors	200	50	1000
R-NOZ-EXT-300	Extension pipe for bonded anchors	300	50	1000
R-NOZ-EXT-3000	Extension pipe for bonded anchors	3000	1	1

R-NOZ-P DOSING PISTON PLUG

NEW PRODUCT

Dosing piston plug - system for automatic dosing resin in deep holes

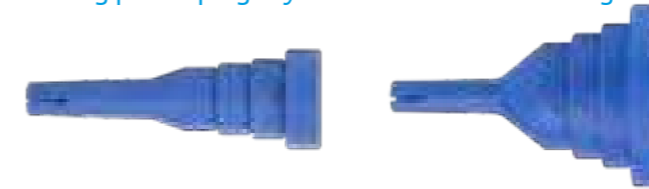

R-NOZ-P

FEATURES AND BENEFITS

- Full control over the degree to which the hole is filled with resin
- Uniform resin injection into the hole
- Absence of air bubbles in the hole.
- Dispensing of the appropriate volume of the resin.



Rawplug code	Drill diameter	Quantity [pcs]		
		Box	Outer	Pallet
R-NOZ-P-16-26	16-26 mm	1	30	2640
R-NOZ-P-28-50	28-50 mm	1	25	2200
R-NOZ-P-SET	16-50 mm	1	25	2200

R-NOZ-ADAPTER AIR ADAPTER

NEW PRODUCT

Adapter for automatic cleaning deep holes before dosing the resin



R-NOZ-ADAPTER-14

R-NOZ-ADAPTER-28

FEATURES AND BENEFITS

- Enables precise cleaning of holes - especially in deep anchoring.
- Uniformly removes dust and dust from the hole.
- Thanks to the use of a compressor speed up work.
- Ideal for serial cleaning of deep holes.



Rawplug code	Hole diameter	Quantity [pcs]		
		Box	Outer	Pallet
R-NOZ-ADAPTER-14	14 - 20 mm	1	30	2640
R-NOZ-ADAPTER-22	22 - 26 mm	1	30	2640
R-NOZ-ADAPTER-28	28 - 50 mm	1	30	2640

R-GUN DISPENSER GUN 600ML

Professional manual dispensing system for resin anchors in cartridges



R-GUN 600 ml

FEATURES AND BENEFITS

- Manual operation - no need for external power supply
- Type of gun used for anchoring strictly depends on the type of cartridge
- Fast and effortless resin injection
- Convenient dispensing tool for a range of situations
- Robust design for all jobsite conditions
- Gun dedicated for side-by-side cartridges of 385 ml

APPLICATIONS

- R-GUN-600-P suitable for:
R-KEX-II 385ml
R-KEX-II 600ml

Rawplug code	Product	Description	Quantity [pcs]	
			Box	Outer
R-GUN-600-P	R-KEX-II-600, R-KEX-II-385	Dispenser gun suitable for: R-KEX II	1	150

R-GUN MULTI DISPENSER GUN

Professional manual dispensing system for resin anchors in cartridges



BEST SELLER

FEATURES AND BENEFITS

- Perfect for professional application
- Robust and durable design for all kinds of working conditions
- Quick and easy resin dispensing
- Manual operation - no need to use power supply
- One extrude for all kinds of cartridges
- Good leverage allows quick and easy resin dispensing
- Convenient to use
- Very high pressure power and injection comfort
- Release pressure system
- Realible metal frame structure
- Durable design meets the high requirements for the construction site and thus offers a long service life

APPLICATIONS

- R-GUN MULTI suitable for:
R-KEX-II 600ml
R-KEX-II 385ml
R-KER-II 400ml
R-KER-II 300ml
R-KER 400ml
R-KER 300ml
R-KEM-II 410ml
R-KEM-II 300ml
R-KEM-II 175ml

Rawplug code	Description	Quantity [pcs]	
		Box	Outer
R-GUN-MULTI	Dispenser gun suitable for: R-KEX-II-600, R-KEX-II-385 R-KER-II-400, R-KER-II-300, R-KER-400, R-KER-300, R-KEM-II-410, R-KEM-II-300, R-KEM-II-175	1	10

R-GUN DISPENSER GUNS

Professional manual dispensing system for resin anchors in cartridges



R-GUN 300 N



R-GUN 345 N



R-GUN 380 P

FEATURES AND BENEFITS

- Manual operation - no need for external power supply
- Fast and effortless resin injection
- Convenient dispensing tool for a range of situations
- Type of gun used for anchoring strictly depends on the type of cartridge
- Robust design for all jobsite conditions

APPLICATIONS

- R-GUN 300 N suitable for:
R-KER-II 300ml
R-KER 300ml
R-KEM-II 300ml
R-KEM-II 175ml
- R-GUN 345 N suitable for:
R-KER-II 345ml
R-KER 345ml
- R-GUN 380 P suitable for:
R-KER-II 400ml
R-KER 400ml
R-KEM-II 410 ml
R-KF2 380ml

Rawplug code	Product	Description	Quantity [pcs]	
			Box	Outer
R-GUN-300-N	R-KER-II-300, R-KER-300, R-KEM-II-300, R-KEM-II-175	Dispenser gun suitable for: 310, 300, 175 ml	1	12
R-GUN-345-N	R-KER-II-345, R-KER-345	Dispenser gun suitable for: 345 ml	1	12
R-GUN-380-P	R-KER-II-400, R-KER-400, R-KEM-II-410, R-KEM-II-400, R-KF2-380	Dispenser gun suitable for: 410, 400, 380 ml	1	10
R-GUN-300-N/H	R-KER-II-300, R-KER-300, R-KEM-II-300	Dispenser gun suitable with a bookcase pendant	1	12

R-GUN PNEUMATIC DISPENSER GUNS

Professional pneumatic dispensing system for resin anchors in cartridges



R-GUN-PNEU 380 ml

FEATURES AND BENEFITS

- Type of gun used for anchoring strictly depends on the type of cartridge
- Fast and effortless resin injection
- Convenient dispensing tool for a range of situations
- Robust design for all jobsite conditions

APPLICATIONS

- R-GUN-PNEU 380 suitable for:
R-KER-II 400ml
R-KER 400ml
R-KEM-II 410ml
R-KF2 380ml

Rawplug code	Description	Quantity [pcs]	
		Box	Outer
R-GUN-380-PNEU	Cartridge Pneumatic Gun suitable for: 410, 400 i 380 ml	1	1

R-GUN ELECTRIC DISPENSER GUN FOR CARTRIDGES

Professional battery-powered cartridge bonded anchors dispenser gun



R-GUN

R-GUN-380-AKU-T

FEATURES AND BENEFITS

- Quick and easy application of resins
- Wireless work thanks to a powerful battery
- Smooth regulation of the dosing speed
- Anti-drip function R-GUN-380-AKU recommended for R-KEM-II-410

APPLICATIONS

- R-GUN-380-AKU-T suitable for:
R-KER-II-400
R-KER-400
R-KEM-II-410
R-KF2-380

Rawplug code	Description	Quantity [pcs]	
		Box	Outer
R-GUN-380-AKU-T	Cartridges Electric Dispenser 380, 400 i 410 ml	1	50

R-GUN BATTERY EXTRUSION GUN WITH DOSING

Professional dispensing system for resin anchors in cartridges



R-GUN

R-GUN-600 ml-AKUDOSE

FEATURES AND BENEFITS

- Quick and easy application of resins
- Wireless work thanks to a powerful battery
- A unique option of memorizing the dose
- Smooth regulation of the dosing speed
- Anti-drip function
- Regulation of the dosing speed
- Battery powered - high performance lithium-ion battery
- Memory function - enables precise dispensing of a repetitive amount of resin

APPLICATIONS

- R-GUN-KEX600-AKUDOSE suitable for:
R-KEX 385ml, R-KEX 600ml


Rawplug code	Description	Quantity [pcs]	
		Box	Outer
R-GUN-KEX600-AKUDOSE	Battery squeezer for bonded anchors: R-KEX-II 600 i R-KEX-II 385 ml	1	1

R-GUN BATTERY DISPENSER GUN CFS+

Professional dispensing system for bonded anchors



R-CFS+-GUN 300 ml

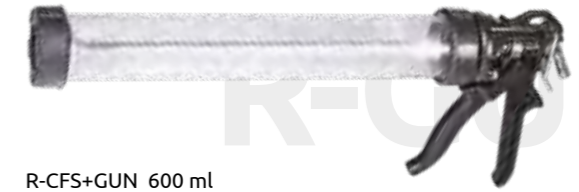

R-CFS+GUN 600 ml

R-GUN

FEATURES AND BENEFITS

- Manual operation - no need for external power supply
- Type of gun used for anchoring strictly depends on the type of cartridge
- Fast and effortless resin injection
- Convenient dispensing tool for a range of situations
- Robust design for all jobsite conditions

APPLICATIONS


- R-CFS+-GUN 600 suitable for:
R-CFS+KERII 300ml, 600ml
R-CFS+RV200 300ml, 600ml
R-CFS+RV200 300ml, 600ml
- R-CFS+-GUN 300 suitable for:
R-CFS+KERII 300ml
R-CFS+ RV200 300ml
R-CFS+ RM50 300ml

Rawplug code	Description	Quantity [pcs]	
		Box	Outer
R-CFS+-GUN	Dispenser gun for CFS+ 300 ml	1	12
R-CFS+GUN-600	Dispenser gun for CFS+ 600 and 300 ml	1	1

R-GUN ELECTRIC DISPENSER GUN CFS+

Professional electric dispensing gun for resin anchors

NEW PRODUCT

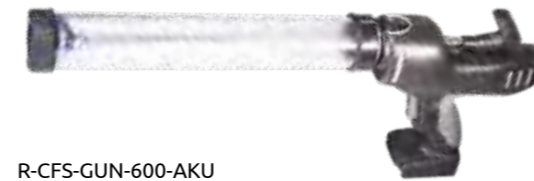

R-CFS-GUN-600-AKU

R-GUN

FEATURES AND BENEFITS

- Fast and effortless resin injection
- Wireless work thanks to a powerful battery.
- Light and ergonomic design.
- Controlled speed ensures controlled dosing.
- Safety switch in case of excessive overload prevents damage.
- Anti-drip function

APPLICATIONS

- R-CFS-GUN-600-AKU suitable for:
R-CFS+KERII 300, 600ml
R-CFS+RV200 300, 600ml
R-CFS+RM50 300, 600ml

Rawplug code	Description	Quantity [pcs]	
		Box	Outer
R-CFS-GUN-600-AKU	Electric Dispenser for CFS+folis 600 i 300 ml	1	12

GUNS MATCHING GUN TO THE PRODUCT

R-GUN-380-AKU-T



- Suitable for:**
- R-KER-II 400 ml
 - R-KER 400 ml
 - R-KEM-II 410ml
 - R-KF2 380ml



R-GUN-KEX600AKUDOSE



- Suitable for:**
- R-KEX-II 600ml
 - R-KEX-II 385ml



R-GUN-380-PNEU



- Suitable for:**
- R-KER-II 400ml
 - R-KER 400ml
 - R-KEM-II 410ml
 - R-KF2 380ml



R-CFS+GUN-600-AKU



- Suitable for:**
- R-CFS+KERII 600ml, 300ml
 - R-CFS+RV200 600ml, 300ml
 - R-CFS+RM50 600ml, 300ml



R-GUN-MULTI



- Suitable for:**
- R-KEX-II 600ml, 385ml
 - R-KER-II 400ml, 300ml
 - R-KER 400ml, 380ml, 300ml
 - R-KEM-II 410ml, 380ml, 300ml, 175ml



GUNS MATCHING GUN TO THE PRODUCT

R-GUN-600-P



- Suitable for:**
- R-KEX-II 600ml, 385ml



R-GUN-380-P



- Suitable for:**
- R-KER-II 400ml
 - R-KER 400ml
 - R-KEM-II 410 ml
 - R-KF2 380ml



R-GUN-300-N



- Suitable for:**
- R-KER-II 300ml
 - R-KER 300ml
 - R-KEM-II 175ml
 - R-KEM-II 300ml




R-GUN-345-N



- Suitable for:**
- R-KER-II 345ml
 - R-KER 345ml



R-CFS+GUN-600; R-GUN-CFS+300-P

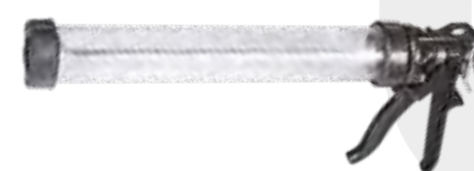

- Suitable for:**
- R-CFS+KERII 300ml, 600ml
 - R-CFS+
 - RV200 300ml, 600ml
 - R-CFS+ RM50 300ml, 600ml





” Mechanical Anchors

Overview of mechanical anchors	212
Concrete screws	215
Throughbolts	218
Rawlbolts	225
SafetyPlus	228
Drop-in anchors	230
Mechanical anchors accessories	232

RAWLPLUG®


100 YEARS OF EXPERTISE IN FIXINGS, FASTENERS AND TOOLS

SOLID WALLS



CONCRETE SCREWS

CONCRETE SCREWS ANCHOR FOR CRACKED AND NON-CRACKED CONCRETE

Self-tapping zinc flake coating or zinc plated concrete screwbolt




R-LX



THROUGHBOLTS OPTION 1



THROUGHBOLTS FOR CRACKED AND NON-CRACKED CONCRETE

Self-tapping zinc flake coating or zinc plated concrete screwbolt



R-HPTIIA4


R-HPTIIZF



THROUGHBOLTS OPTION 7

THROUGHBOLTS FOR NON-CRACKED CONCRETE



Stainless steel or zinc-plated throughbolt for non-cracked concrete



R-XPTIIA4

R-XPT-HD


R-XPT





RAWLBOLTS

RAWLBOLT® FOR CRACKED, NON-CRACKED CONCRETE, HOLLOW CORE SLAB AND CERAMIC SUBSTRATES

World's most popular all-purpose expanding shield anchor for solid or hollow substrate




R-RBL & R-RBP



DROP-IN ANCHORS

INTERNALLY THREADED ANCHORS FOR CRACKED AND NON-CRACKED CONCRETE



Internally threaded wedge anchor for simple hammer-set installation



R-DCA-A4

R-DCA

R-DCL

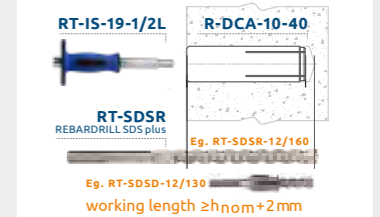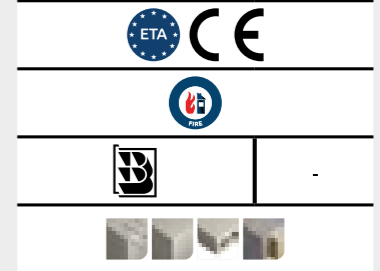



MECHANICAL ANCHORS
EFFICIENCY IN THE MOST DEMANDING ENVIRONMENTS



RAWPLUG® Academy

Use the e-learning training or sign up for our hands-on training.



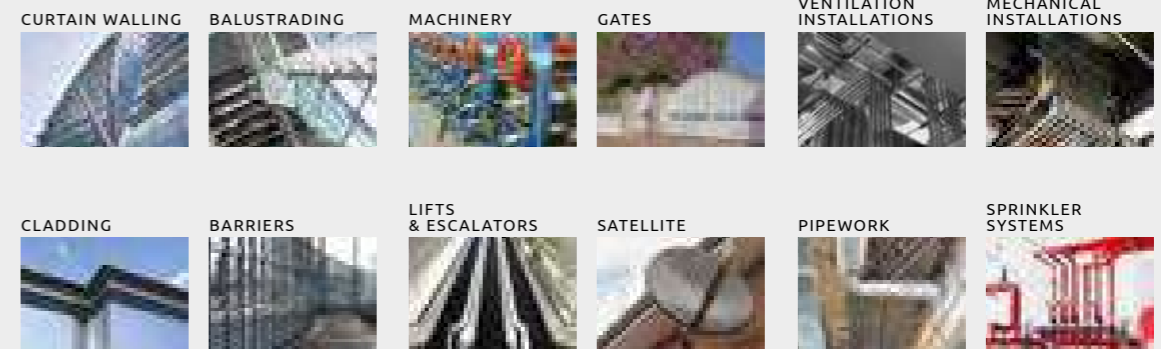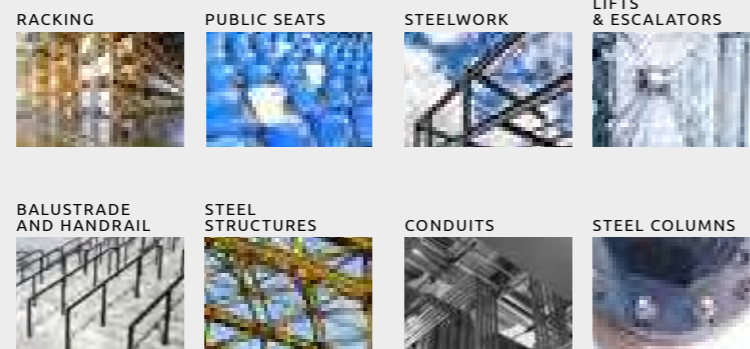




- Mechanical anchors - general characteristics and applications
- Mechanical anchors - characteristic of product R-LX



Overview of our range ✓

											
MECHANICAL ANCHORS		R-LX	R-HPTIIA4	R-HPTIIF	R-XPTIIA4	R-XPT					
MATERIAL	ZINC PLATED STEEL	✓	-	-	-	✓					
	ZINC FLAKED STEEL	✓	-	✓	-	-					
	HOT DIP GALVANIZED STEEL	-	-	-	-	-					
	STAINLESS STEEL	-	✓	-	✓	-					
SUBSTRATES	CONCRETE	✓	✓	✓	✓	✓					
	CRACKED CONCRETE	✓	✓	✓	-	-					
	REINFORCED CONCRETE	✓	✓	✓	✓	✓					
	STONE	✓	✓	✓	✓	✓					
	HOLLOW CORE SLAB	✓	-	-	-	-					
	SOLID BRICK	-	-	-	-	-					
	SANDLIME HOLLOW BRICK	-	-	-	-	-					
	LIGHTWEIGHT CONCRETE BLOCKS	-	-	-	-	-					
	AERATED CONCRETE	-	-	-	-	-					
APPROVALS		✓ ETA 17/0806	✓ ETAG 001-2 Option 1	✓ ETAG 001-2 Option 1	✓ ETAG 001-2 Option 7	✓ ETAG 001-2 Option 7					
		✓	✓	✓	-	-					
		✓ C1, C2	✓ C1	✓ C1, C2	-	-					
DESIGN TENSION AND SHEAR LOADS IN kN	[kN]	N_{Rd}	V_{Rd}	N_{Rd}	V_{Rd}	N_{Rd}	V_{Rd}	N_{Rd}	V_{Rd}	N_{Rd}	V_{Rd}
	5	M5	M5	M8	M8	M8	M8	M8	M8	M6	M6
	10										
	15										
	20									M24	
	25			M16				M16			
	30	M14			M16	M20			M16		
	35				M16				M16		
	40										
	45										
	50		M14								M24
60						M20					
70											
80											
90											
100											

Overview of our range ✓

								
		R-XPT-HD	RAWLBOLT	SAFETY PLUS II	SAFETY PLUS	R-DCA	R-DCL	R-DCA-A4
		-	✓	✓	✓	✓	✓	-
		-	-	-	-	-	-	-
		✓	-	-	-	-	-	-
		-	-	-	-	-	-	✓
		✓	✓	✓	✓	✓	✓	✓
		-	✓	✓	-	✓	✓	✓
		✓	✓	✓	✓	✓	✓	✓
		✓	✓	✓	✓	✓	✓	✓
		-	✓	-	-	-	✓	-
		-	✓	-	-	-	-	-
		-	✓	-	-	-	-	-
		-	-	-	-	-	-	-
		-	✓	✓	✓	✓	✓	✓
		-	✓	✓	-	✓	✓	✓
		-	-	✓	-	-	-	-
DESIGN TENSION AND SHEAR LOADS IN kN	N_{Rd}							
	V_{Rd}							
	N_{Rd}	M6	M6	M6	M8	M8	M8	M8
	V_{Rd}	M6	M6	M6	M8	M8	M8	M8
	N_{Rd}	M20	M20	M20	M20			
	V_{Rd}	M20	M20	M20	M20			
	N_{Rd}							
	V_{Rd}							
	N_{Rd}							
	V_{Rd}							
	N_{Rd}							

QUICK, EFFICIENT AND SECURE ANCHORING

The product is fully supported by **Easy Fix** design software

6 screw head variants for **easy adaptation to fixing into substrate**

Removal and **multi-functional use**

Main thread's distinctive outline to **maximise the undercut**

Testing gauge allows to determine whether the screw is suitable for re-use

Design facilitating transfer of tightening torque to thread


Perfect tip profile **making application easy**

Unique and **patented thread profile**

Double thread that ensures **optimum load capacity**

R-LX CONCRETE SCREW ANCHOR

Self-tapping concrete screwbolt

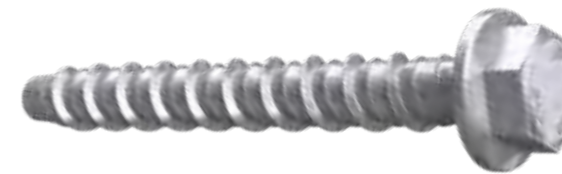

BEST SELLER

R-LX

FEATURES AND BENEFITS

- Time-efficient installation through streamlined procedure - simply drill and drive
- Completely removable with possibility of reuse
- Unique design with patented threadform ensures high performance for relatively small hole diameter
- Non-expansion functioning ensures low risk of damage to base material and makes R-LX ideal for installation near edges and adjacent anchors
- Special zinc flake corrosion-resistant coating
- High performance in both uncracked and cracked concrete
- Different head types for any application
- Oversize head for fixtures with elongated holes
- Excellent product for temporary fixing
- Suitable for standard and reduced embedment depth


APPLICATIONS

- Through-fixing
- Temporary anchorages
- Formwork support systems
- Balustrading & handrails
- Fencing & gates manufacturing and installation
- Racking systems
- Public seating
- Scaffolding

BASE MATERIALS


- Approved for use in:**
- Cracked concrete C20/25-C50/60
 - Non-cracked concrete C20/25-C50/60
 - Reinforced concrete
 - Unreinforced concrete
 - Hollow Core Slab (only R-LX-06)

- Also suitable for use in:**
- Natural Stone (after site testing)



APPROVALS AND REPORTS


- ETA-17/0783
- ETA-17/0806




Installation guide R-LX-HF



Installation guide R-LX-CS



Installation guide R-LX-I



Installation guide R-LX-E



Installation guide R-LX-P



Installation guide R-LX-PX



Installation guide R-LX-H




*non-ETA - temporary fixing only

R-XPT THROUGH BOLT (cont.)

Size	Rawplug code	Anchor		Fixture			Quantity	
		Diameter	Length	Max. thickness		Hole diameter	Box	Pallet
				t _{fix,r}	t _{fix,s}			
mm	mm	mm	mm	mm	mm	pcs	pcs	
M8	R-XPT-08075/10	8	75	25	10	9	100	12000
	R-XPT-08080/15	8	80	30	15	9	100	12000
	R-XPT-08085/20	8	85	35	20	9	100	12000
	R-XPT-08095/30	8	95	45	30	9	100	12000
	R-XPT-08115/50	8	115	65	50	9	100	12000
	R-XPT-08140/75	8	140	90	75	9	100	10800
M10	R-XPT-08150/85	8	150	100	85	9	100	10800
	R-XPT-10065/5	10	65	5	-	11	50	10500
	R-XPT-10080/10	10	80	20	10	11	50	6000
	R-XPT-10095/25	10	95	35	25	11	50	6000
	R-XPT-10115/45	10	115	55	45	11	50	6000
	R-XPT-10130/60	10	130	70	60	11	50	6000
M12	R-XPT-10140/70	10	140	80	70	11	50	6000
	R-XPT-10150/80	10	150	90	80	11	50	5400
	R-XPT-10180/110	10	180	120	110	11	50	5400
	R-XPT-12080/5	12	80	5	-	13	50	6000
	R-XPT-12100/5	12	100	25	5	13	50	6000
	R-XPT-12120/25	12	120	45	25	13	50	6000
M16	R-XPT-12125/30	12	125	50	30	13	50	3800
	R-XPT-12135/40	12	135	60	40	13	50	5400
	R-XPT-12140/45	12	140	65	45	13	50	5400
	R-XPT-12150/55	12	150	75	55	13	50	3800
	R-XPT-12160/65	12	160	85	65	13	50	4000
	R-XPT-12180/85	12	180	105	85	13	50	3800
M20	R-XPT-12200/105	12	200	125	105	13	50	4000
	R-XPT-12220/125	12	220	145	125	13	50	3800
	R-XPT-12250/155	12	250	175	155	13	25	3000
	R-XPT-12280/185	12	280	205	185	13	20	1600
	R-XPT-16100/5	16	100	5	-	18	25	3600
	R-XPT-16105/10	16	105	10	-	18	25	3600
M24	R-XPT-16125/5	16	125	25	5	18	25	2700
	R-XPT-16140/20	16	140	40	20	18	25	1900
	R-XPT-16150/30	16	150	50	30	18	25	1900
	R-XPT-16160/40	16	160	60	40	18	25	2700
	R-XPT-16180/60	16	180	80	60	18	25	1900
	R-XPT-16200/80	16	200	100	80	18	25	3000
M24	R-XPT-16220/100	16	220	120	100	18	25	1900
	R-XPT-16250/130	16	250	150	130	18	25	3000
	R-XPT-16280/160	16	280	180	160	18	15	1140
	R-XPT-16300/180	16	300	200	180	18	10	650
	R-XPT-20125/5	20	125	5	-	22	25	1900
	R-XPT-20160/20	20	160	40	20	22	25	1900
M24	R-XPT-20200/60	20	200	80	60	22	10	1200
	R-XPT-20250/110	20	250	130	110	22	10	1200
	R-XPT-20300/160	20	300	180	160	22	10	760
	R-XPT-24180/20	24	180	35	20	26	10	760
	R-XPT-24260/100	24	260	115	100	26	10	760
	R-XPT-24300/140	24	300	155	140	26	10	760

R-RBL RAWLBOLT - LOOSE BOLT

World's most popular all-purpose expanding shield anchor - loose bolt version

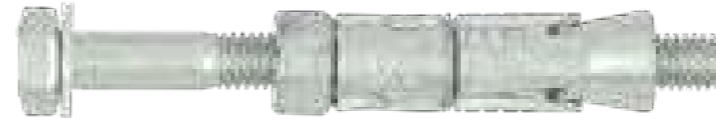

R-RBL

FEATURES AND BENEFITS

- RAWLBOLT® - first ever mechanical anchor in the world, forerunner of all of the later mechanical anchors
- For use in cracked and non-cracked concrete (ETA option 1), hollow-core slabs, flooring blocks and ceramics
- Product recommended for applications requiring fire resistance
- Three-pieces expanding sleeve of maximum expansion provides optimal load and safety of use in any substrate
- Wide range of diameters (M6 to M20)



APPLICATIONS

- Roller shutter doors
- Fire doors
- Structural steelwork
- Security grills
- Heavy machinery
- Pipework/ductwork supports

BASE MATERIALS

- Approved for use in:**
- Cracked concrete C20/25-C50/60
 - Non-cracked concrete C20/25-C50/60
 - Unreinforced concrete
 - Reinforced concrete

APPROVALS AND REPORTS


- ETA-11/0479



Installation guide movie

Also suitable for use in:

- Solid clay brick ≥ 20MPa
- Hollow Lightweight Concrete Block LAC 5 ≥ 5MPa
- Hollow Sand-lime Brick ≥ 15MPa
- Concrete hollow floor block (eg. Teriva)
- Hollow-core Slab C20/25
- Hollow-core Slab C30/37-C50/60
- Natural Stone (after site testing)



Size	Rawplug code	Anchor			Fixture		Quantity		
		Diameter	External diameter	Length	Max. thickness	Hole diameter	Box	Outer	Pallet
		mm	mm	mm	mm	mm	pcs	pcs	pcs
M6	R-RBL-M06/10W	6	12	55	10	6.5	50	400	22400
	R-RBL-M06/25W	6	12	70	25	6.5	50	400	22400
	R-RBL-M06/40W	6	12	85	40	6.5	50	50	20800
M8	R-RBL-M08/10W	8	14	65	10	9	50	400	22400
	R-RBL-M08/25W	8	14	80	25	9	50	50	20800
	R-RBL-M08/40W	8	14	95	40	9	50	50	20800
M10	R-RBL-M10/10W	10	16	75	10	11	50	50	20800
	R-RBL-M10/25W	10	16	90	25	11	50	50	12800
	R-RBL-M10/50W	10	16	115	50	11	50	50	15600
M12	R-RBL-M10/75W	10	16	140	75	11	50	50	12800
	R-RBL-M12/10W	12	20	90	10	13	25	25	10400
	R-RBL-M12/25W	12	20	105	25	13	25	25	6400
M16	R-RBL-M12/40W	12	20	120	40	13	25	25	2250
	R-RBL-M12/60W	12	20	140	60	13	25	25	7800
	R-RBL-M16/15W	16	25	135	15	17	10	10	2560
M20	R-RBL-M16/30W	16	25	150	30	17	10	10	2560
	R-RBL-M16/60W	16	25	180	60	17	10	10	2560
M24	R-RBL-M20/60W	20	32	195	60	22	10	10	690
	R-RBL-M20/100W	20	32	235	110	22	10	10	1280
M24	R-RBL-M24/100W*	24	38	255	100	26	5	5	144
	R-RBL-M24/150W*	24	38	300	150	26	2	10	1280

*not included in the approval

R-RBP RAWLBOLT - BOLT PROJECTING

World's most popular all-purpose expanding shield anchor - bolt projecting version



FEATURES AND BENEFITS

- RAWLBOLT® - first ever mechanical anchor in the world, forerunner of all of the later mechanical anchors
- For use in cracked and non-cracked concrete (ETA option 1), hollow-core slabs, flooring blocks and ceramics
- Product recommended for applications requiring fire resistance
- Three-piece expanding sleeve of maximum expansion provides optimal load and safety of use in any substrate
- Wide range of diameters (M6 to M20)

APPLICATIONS

- Roller shutter doors
- Fire doors
- Structural steelwork
- Security grills
- Heavy machinery
- Pipework/ductwork supports

BASE MATERIALS

Approved for use in:


- Cracked concrete C20/25-C50/60
- Non-cracked concrete C20/25-C50/60
- Unreinforced concrete
- Reinforced concrete

Also suitable for use in:

- Solid clay brick ≥ 20 MPa

BASE MATERIALS

- Hollow Lightweight Concrete Block LAC $5 \geq 5$ MPa
- Hollow Sand-lime Brick ≥ 15 MPa
- Concrete hollow floor block (eg. Teriva)
- Hollow-core Slab C20/25
- Hollow-core Slab C30/37-C50/60
- Natural Stone (after site testing)



APPROVALS AND REPORTS

- ETA-11/0479



Size	Rawplug code	Anchor			Fixture		Quantity		
		Diameter mm	External diameter mm	Length mm	Max. thickness mm	Hole diameter mm	Box pcs	Outer pcs	Pallet pcs
M6	R-RBP-M06/10W	6	12	65	10	6.5	50	400	20800
	R-RBP-M06/25W	6	12	80	25	6.5	50	400	20800
	R-RBP-M06/60W	6	12	115	60	6.5	50	50	20800
M8	R-RBP-M08/10W	8	14	75	10	9	50	400	15600
	R-RBP-M08/25W	8	14	90	25	9	50	50	20800
	R-RBP-M08/60W	8	14	125	60	9	50	50	20800
M10	R-RBP-M10/15W	10	16	90	15	11	50	50	12800
	R-RBP-M10/30W	10	16	105	30	11	50	50	15600
	R-RBP-M10/60W	10	16	135	60	11	50	50	12800
M12	R-RBP-M12/15W	12	20	110	15	13	25	25	10400
	R-RBP-M12/30W	12	20	125	30	13	25	25	6400
	R-RBP-M12/75W	12	20	170	75	13	25	25	7800
M16	R-RBP-M16/15W	16	25	150	15	17	10	10	2560
	R-RBP-M16/35W	16	25	170	35	17	10	10	2560
	R-RBP-M16/75W	16	25	210	75	17	10	10	690
M20	R-RBP-M20/15W	20	32	170	15	22	10	10	3120
	R-RBP-M20/30W	20	32	185	30	22	10	10	690
M24	R-RBP-M20/100W	20	32	255	100	22	10	10	1280
	R-RBP-M24/75W*	24	38	255	75	26	5	5	330
	R-RBP-M24/150W*	24	38	300	150	26	2	2	400

*not included in the approval

R-RBL-E / R-RBL-H RAWLBOLT EYE & HOOK


World's most popular all-purpose expanding shield anchor



R-RBL-E / R-RBL-H RAWLBOLT EYE & HOOK (cont.)

FEATURES AND BENEFITS

- The only original Rawlbolt with single-piece cold-formed eyebolt for maximum durability
- Three-piece expanding sleeve of maximum expansion provides optimal load and safety of use in any substrate
- Eye and hook Rawlbolts are not suitable for all arrest systems nor shock loading
- Closed, forged hook for maximum safety

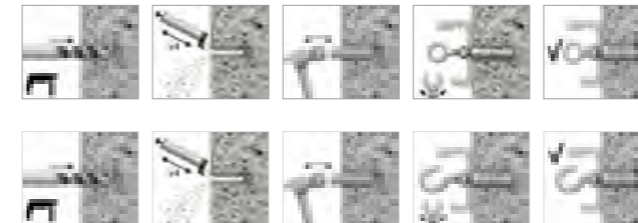


APPLICATIONS

- Supporting guy ropes, stays and cables
- Supporting ladder restraints

BASE MATERIALS

Suitable for use in:

- Cracked concrete C20/25-C50/60
- Non-cracked concrete C20/25-C50/60
- Unreinforced concrete
- Reinforced concrete
- Solid clay brick ≥ 20 MPa
- Hollow lightweight concrete Block LAC $5 \geq 5$ MPa



BASE MATERIALS

- Hollow sand-lime brick ≥ 15 MPa
- Concrete hollow floor block (eg.Teriva)
- Hollow-core Slab C20/25
- Hollow-core Slab C30/37-C50/60

Also suitable for use in:

- Natural stone (after site testing)



Size	Rawplug code	Anchor			Quantity		
		Diameter mm	External diameter mm	Length mm	Box pcs	Outer pcs	Pallet pcs
R-RBL-E							
M6	R-RBL-06EW	6	12	73	25	400	22400
M8	R-RBL-08EW	8	14	87	25	200	11200
M10	R-RBL-10EW	10	16	108	25	25	6400
M12	R-RBL-12EW	12	20	130	25	25	7800
R-RBL-H							
M6	R-RBL-06HW	6	12	83	25	400	16000
M8	R-RBL-08HW	8	14	98	25	200	8000
M10	R-RBL-10HW	10	16	120	25	25	4000
M12	R-RBL-12HW	12	20	145	25	25	3000

R-RB RAWLBOLT SHIELD

World's most popular all-purpose expanding shield anchor - shield



FEATURES AND BENEFITS

- Product recommended for applications requiring fire resistance
- Three-piece expanding sleeve of maximum expansion provides optimal load and safety of use in any substrate
- Designed & manufactured for maximum performance



APPLICATIONS

- Roller shutter doors
- Fire doors
- Wall plates
- Security grills
- Signs
- Manufacturing and installation of fencing
- Heavy machinery
- Pipework/duct work support
- Supporting guy ropes, stays and cables
- Supporting ladder restraints

BASE MATERIALS

Suitable for use in:

- Cracked concrete C20/25-C50/60
- Non-cracked concrete C20/25-C50/60
- Unreinforced concrete
- Reinforced concrete
- Solid clay brick ≥ 20 MPa




R-RB

Size	Rawplug code	Anchor			Quantity		
		Diameter mm	External diameter mm	Length mm	Box pcs	Outer pcs	Pallet pcs
M6	R-RB-M06W	6	12	45	100	800	44800
M8	R-RB-M08W	8	14	50	100	100	41600
M10	R-RB-M10W	10	16	60	100	100	25600
M12	R-RB-M12W	12	20	75	50	50	12800
M16	R-RB-M16W	16	25	115	25	25	7800
M20	R-RB-M20W	20	32	130	15	15	3840
M24	R-RB-M24W	24	38	150	5	5	2080

R-SPLII SAFETY PLUS II

High performance mechanical anchor for cracked and non-cracked concrete

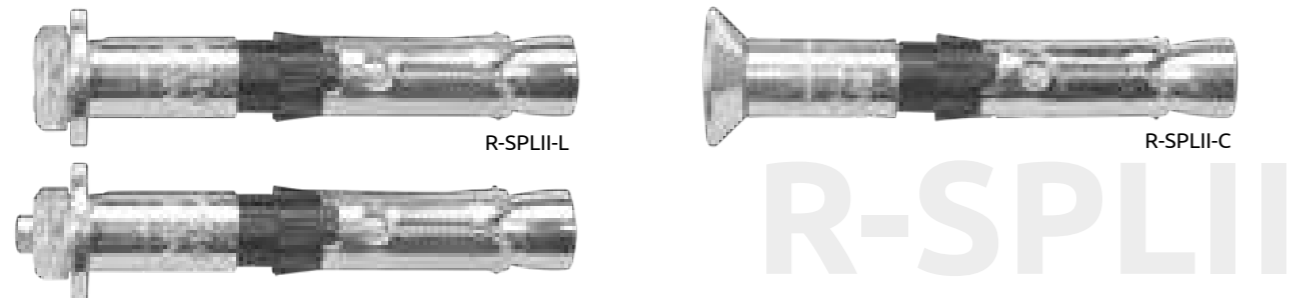

FEATURES AND BENEFITS

- Mechanical anchor for highest tension and shear loads
- Seismic category C2 for structural applications. Seismic category C1 for non-structural use in areas with low seismic risk
- For usage with required fire resistance
- ETA Option 1 for cracked and non-cracked concrete
- Antirotation brush to prevent rotation during installation.
- Anchor's construction allows easy through-installation (drilling and installation through fixed material)
- Three types of tips (nut, flat or tapered bolt) allow simple fitment for installed element
- 8.8 grade steel material of anchor provides high durability

R-SPLII-P APPLICATIONS

- Structural steel
- Masonry support
- Cladding restraints
- Road Signs
- Heavy machinery
- Racking systems
- Industrial doors
- Safety barriers


BASE MATERIALS

Approved for use in:

- Cracked concrete C20/25-C50/60
- Non-cracked concrete C20/25-C50/60
- Unreinforced concrete
- Reinforced concrete

Also suitable for use in:

- Natural Stone (after site testing)




APPROVALS AND REPORTS

- ETA-14/0345



VERSIONS

- R-SPLII-L - Loose Bolt
- R-SPLII-P - Bolt Projecting
- R-SPLII-C - Countersunk



Size	Rawplug code	Anchor			Quantity		
		Thread size mm	External diameter mm	Length mm	Box pcs	Outer pcs	Pallet pcs
R-SPLII SafetyPlus - Loose Bolt							
M6	R-SPL-II-06080/20L	6	10	80	50	400	9600
	R-SPL-II-06110/50L	6	10	110	50	300	7200
M8	R-SPL-II-08080/10L	8	12	80	25	200	4800
	R-SPL-II-08090/20L	8	12	90	25	200	4800
M10	R-SPL-II-08120/50L	8	12	120	25	150	3600
	R-SPL-II-10090/10L	10	15	90	20	160	3840
	R-SPL-II-10100/20L	10	15	100	20	160	3840
	R-SPL-II-10130/50L	10	15	130	20	120	2880
M12	R-SPL-II-10180100L	10	15	180	20	80	500
	R-SPL-II-12110/10L	12	18	110	20	80	1920
	R-SPL-II-12125/25L	12	18	125	20	20	3840
	R-SPL-II-12150/50L	12	18	150	20	20	3840
M16	R-SPL-II-12200100L	12	18	200	20	20	2100
	R-SPL-II-16125/10L	16	24	125	10	60	1440
	R-SPL-II-16140/25L	16	24	140	10	40	960
	R-SPL-II-16165/50L	16	24	165	10	10	890
	R-SPL-II-16215100L	16	24	215	10	10	700

R-SPLII SAFETY PLUS II (cont.)

Size	Rawplug code	Anchor			Quantity		
		Thread size mm	External diameter mm	Length mm	Box pcs	Outer pcs	Pallet pcs
R-SPLII-P SafetyPlus - Bolt Projecting							
M6	R-SPL-II-06110/50P	6	10	110	50	300	7200
M8	R-SPL-II-08090/20P	8	12	90	25	200	4800
M10	R-SPL-II-10100/20P	10	15	100	20	160	3840
M12	R-SPL-II-12125/25P	12	18	125	20	20	3840
	R-SPL-II-12150/50P	12	18	150	20	20	2200
M16	R-SPL-II-16125/10P	16	24	125	10	60	1440
R-SPLII-C SafetyPlus - Countersunk							
M6	R-SPL-II-06080/25C	6	10	80	50	400	9600
M8	R-SPL-II-08080/16C	8	12	80	25	250	6000
	R-SPL-II-08090/26C	8	12	90	25	200	4800
M10	R-SPL-II-10090/17C	10	15	90	20	20	4060
	R-SPL-II-10100/27C	10	15	100	20	200	4800
M12	R-SPL-II-12125/33C	12	18	125	20	80	1920

R-SPL SAFETYPLUS

High performance mechanical anchor for non-cracked concrete



FEATURES AND BENEFITS

- High performance in non-cracked concrete confirmed by ETA Option 7
- Design of SafetyPlus allows for easy through fixing
- Integral controlled collapse and anti-rotation feature ensures fixture is firmly secured
- Unique zig-zag feature provides balanced expansion, ensuring secure setting and maximised load-bearing capacity
- Case-hardened nut with optimum taper angle for enhanced expansion
- Fire resistant

APPLICATIONS

- Structural steel
- Masonry support
- Cladding restraint
- Road Signs
- Heavy machinery
- Racking systems
- Industrial doors
- Safety barriers


BASE MATERIALS

Approved for use in:

- Non-cracked concrete C20/25-C50/60
- Unreinforced concrete
- Reinforced concrete

Also suitable for use in:

- Natural Stone (after site testing)



APPROVALS AND REPORTS

- ETA-11/0126



VERSIONS

- R-SPL - Loose Bolt
- R-SPL-BP - Bolt Projecting
- R-SPL-C - Countersunk



R-SPL SAFETYPLUS (cont.)

Size	Rawplug code	Anchor [mm]			Quantity		
		Thread size	External diameter	Length	Box	Outer	Pallet
		mm	mm	mm	pcs	pcs	pcs
R-SPL SafetyPlus - Loose Bolt							
M8	R-SPL-08090/15	8	12	90	50	50	9000
	R-SPL-08110/40	8	12	110	50	50	5400
M10	R-SPL-10105/20	10	15	105	50	50	5400
	R-SPL-10120/40	10	15	120	50	50	5400
	R-SPL-10140/60	10	15	140	50	50	3000
M12	R-SPL-12120/25	12	18	120	25	25	2250
	R-SPL-12150/50	12	18	150	25	25	2250
M16	R-SPL-16145/25	16	24	145	10	10	900
	R-SPL-16170/50	16	24	170	10	10	900
M20	R-SPL-20175/30	20	28	175	10	10	690
R-SPL-BP SafetyPlus - Bolt Projecting							
M10	R-SPL-BP-10110/20	10	15	110	50	50	5400
M12	R-SPL-BP-12135/25	12	18	135	25	25	2700
	R-SPL-BP-12160/50	12	18	160	25	25	2250
M16	R-SPL-BP-16160/25	16	24	160	10	10	900
	R-SPL-BP-16185/50	16	24	185	10	10	690
M20	R-SPL-BP-20190/30	20	28	190	10	10	690
R-SPL-C SafetyPlus - Countersunk							
M8	R-SPL-C-08090/20	8	12	90	50	50	9000
M10	R-SPL-C-10105/25	10	15	105	50	50	5400
M12	R-SPL-C-12125/30	12	18	120	25	25	2250
M16	R-SPL-C-16145/30	16	24	145	10	10	900

R-DCA-A4 STAINLESS STEEL DROP-IN ANCHORS (cont.)

Internally threaded stainless steel drop-in anchors for simple hammer-set installation



R-DCA-A4

FEATURES AND BENEFITS

- High performance in cracked and non-cracked concrete confirmed by ETA
- Product is covered with European Technical Assessment for multi-point non-structural fixings
- Product recommended for applications requiring fire resistance
- Stainless steel material for high resistance to corrosion
- Easy to install by hammer action and manual setting tool
- Slotted sleeve and internal wedge component together facilitate easy setting and expansion
- Product was tested for construction fixing



APPLICATIONS

- Pipelines systems
- Ventilation systems
- Sprinkler systems
- Cable conduits and wires
- Gratings

BASE MATERIALS

- Approved for use in:**
- Cracked concrete C20/25-C50/60
 - Non-cracked concrete C20/25-C50/60
 - Unreinforced concrete
 - Reinforced concrete



APPROVALS AND REPORTS

- ETA-13/0584



Installation guide movie

R-DCA-A4 STAINLESS STEEL DROP-IN ANCHORS (cont.)

Size	Rawplug code	Anchor			Quantity		
		Diameter	External diameter	Length	Box	Outer	Pallet
		mm	mm	mm	pcs	pcs	pcs
M6	R-DCA-06-25-A4	6	8	25	100	1000	100000
M8	R-DCA-08-30-A4	8	10	30	100	1000	64000
M10	R-DCA-10-40-A4	10	12	40	50	500	32000
M12	R-DCA-12-50-A4	12	15	50	50	400	16000
M16	R-DCA-16-65-A4	16	20	65	25	100	6000

R-DCA / R-DCL DROP-IN ANCHORS

Internally-threaded wedge anchor for simple hammer-set installation



R-DCA



R-DCL

VERSIONS

- R-DCA - Drop-in Anchors
- R-DCL - Lipped Drop-in Anchors

FEATURES AND BENEFITS

- High performance in cracked and non-cracked concrete confirmed by ETA
- Product is covered with European Technical Assessment for multi-point non-structural fixings
- Product recommended for applications requiring fire resistance
- Internally threaded to be used with threaded stud or bolt
- Easy to install by hammer action and manual setting tool
- Slotted sleeve and internal wedge component together facilitate easy setting and expansion
- Product was tested for construction fixing



APPLICATIONS

- Pipelines systems
- Ventilation systems
- Sprinkler systems
- Cable conduits and wires
- Gratings

BASE MATERIALS

Approved for use in:

- Cracked concrete C20/25-C50/60
- Non-cracked concrete C20/25-C50/60
- Unreinforced concrete
- Reinforced concrete



APPROVALS AND REPORTS

- ETA-13/0584



Installation guide movie

Size	Rawplug code	Anchor			Quantity		
		Diameter	External diameter	Length	Box	Outer	Pallet
		mm	mm	mm	pcs	pcs	pcs
R-DCA							
M6	R-DCA-06-25	6	8	25	100	1000	36000
M8	R-DCA-08-30	8	10	30	100	1000	60000
M10	R-DCA-10-40	10	12	40	50	500	25000
M12	R-DCA-12-50	12	15	50	50	400	18000
M16	R-DCA-16-65	16	20	65	25	100	6000
M20	R-DCA-20-80	20	25	80	15	90	3240
R-DCL							
M6	R-DCL-06-25	6	8	25	100	100	56000
M8	R-DCL-08-25	8	10	25	100	100	57600
	R-DCL-08	8	10	30	100	100	57600
M10	R-DCL-10-25	10	12	25	50	50	36000
	R-DCL-10	10	12	40	50	50	36000
M12	R-DCL-12-25	12	15	25	50	200	6000
	R-DCL-12	12	15	50	50	50	6000
M16	R-DCL-16	16	20	65	25	25	6000

Drop In Anchor SETTING TOOLS

NEW PRODUCT

Manual setting tool for drop in anchor installation



R-DCA-ST-II

FEATURES AND BENEFITS ▾

- Manual installation of wedge anchors with rubber grip and hand protection
- Tool leaves marks on head of anchors confirming correct installation

APPLICATIONS ▾

- Installation of drop in anchor

APPROVALS AND REPORTS ▾

- ETA-13/0584



Size	Rawplug code	Tool tip		Quantity	
		Diameter	Length	Box	Outer
		mm	mm	pcs	pcs
R-DCA-ST-II					
M6	R-DCA-ST-II-06	5	14.8	1	10
M8	R-DCA-ST-II-08-25	6.6	17	10	10
	R-DCA-ST-II-08	6.6	18	1	10
M10	R-DCA-ST-II-10-30	8.3	18	1	10
	R-DCA-ST-II-10-25	8.3	17	10	10
	R-DCA-ST-II-10	8.3	23	1	10
M12	R-DCA-ST-II-12-25	10.2	17	10	10
	R-DCA-ST-II-12	10.2	28	1	10
M16	R-DCA-ST-II-16	13.5	33	1	10

Concrete screw RE-USABILITY TESTING GAUGE

Internally-threaded wedge anchor for simple hammer-set installation



FEATURES AND BENEFITS ▾

- Testing Gauge allows to determine whether the product R-LX is suitable for re-use

APPLICATIONS ▾

- Concrete screw re-usability testing gauge



Rawplug code	Description	Quantity			
		Pieces in box	Box	Outer	Pallet
R-S1-LX-TEST-08/2	Testing gauge for R-LX-08	2	1	1	320
R-S1-LX-TEST-10/2	Testing gauge for R-LX-10	2	1	1	320
R-S1-LX-TEST-14/2	Testing gauge for R-LX-14	2	1	1	320

Rawlplug Tension Tester Kit

Model 2000 tester kit for measurement of tensile loads on anchors



Rawlplug Tension Tester Kit

FEATURES AND BENEFITS ▾

- Pull-out tester enables engineers to confirm the holding power of anchors in most construction materials

APPLICATIONS ▾

- Pull-out tester for testing fixings, fasteners and anchors

Rawplug code	Description	Quantity
		Box
R-TESTER	Tension Tester Kit	1



” Lightweight Fixings

Overview of lightweight fixings	238
Frame fixings	239
Universal fixings	245
Metal fixings	248
Hammer-in fixings	249
Drywall fixings	251
Metal frame anchor	254
Metal frame screw	254

UNIVERSAL


PLASTERBOARD

SOLID WALLS

R-FF1

FRAME FIXING WITH LONG EXPANSION ZONE


Universal frame fixing for many applications



CURTAIN WALLING



DOOR AND WINDOW FRAMES




TV BRACKETS




R-FFS

FRAME FIXING WITH SHORT EXPANSION ZONE


Fast assembly due to two shallow anchoring depths




VENTILATED FACADES



AIR CONDITIONER




BALUSTRADES AND HANDRAILS




R-UNO

UNIVERSAL PLUG


Truly universal plug which fixes into any base material




SWINGS



BATHROOM FITTINGS





WALL SHELVES




4ALL

UNIVERSAL PLUG


High performance nylon plug for all types of substrates

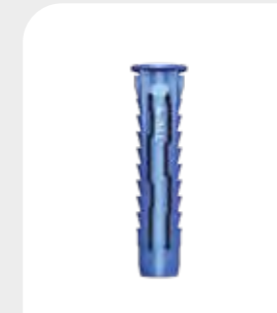

POTS



KITCHEN RAILS




INDUSTRIAL CAMERAS




**R-DRA-01
R-DRA-02**

SELF-DRILL FIXING

Quick and easy to install in plasterboard and gypsum fibreboards. Perfect for loads of up to 15 kg.



LIGHTING



ELECTRICAL OUTLETS






WALL SHELVES




R-FX

NYLON HAMMER-IN FIXING


The hammer-in fixing for fast, simple, cost-effective installations

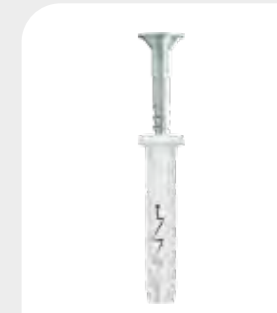

PLINTHS



TIMBER/METAL BATTENS



TOWEL RAILS



LIGHTWEIGHT FIXINGS
UNIVERSAL SOLUTIONS FOR ALL APPLICATIONS



RAWPLUG Academy

Use the e-learning training or sign up for our hands-on training.

Overview of our range Lightweight Fixings selector



MECHANICAL ANCHORS		R-FF1	R-FFS	4ALL	UNO®	RAWL-NUT	GS	R-KMW	FX	R-DRA	R-O	R-WHO	R-SM	R-SPO											
MATERIAL	ZINC PLATED STEEL	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											
	ZINC FLAKED STEEL	✓	✓	-	-	-	-	-	-	-	-	-	-	-											
	HOT DIP GALVANIZED STEEL	-	-	-	-	-	-	-	-	-	-	-	-	-											
	STAINLESS STEEL	✓	✓	-	-	-	-	-	-	-	-	-	-	-											
SUBSTRATES	CONCRETE	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	-	-											
	CRACKED CONCRETE	✓	✓	-	-	-	✓	-	-	-	-	-	-	-											
	STONE	✓	✓	✓	-	-	✓	-	-	-	-	-	-	-											
	HOLLOW CORE SLAB	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-											
	SOLID BRICK	✓	✓	✓	✓	✓	-	✓	✓	-	✓	✓	-	-											
	SANDLIME SOLID BRICK	✓	✓	✓	✓	-	-	-	✓	-	-	-	-	-											
	HOLLOW BRICK	✓	✓	✓	✓	✓	-	-	-	-	-	✓	-	-											
	SANDLIME HOLLOW BRICK	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-											
	LIGHTWEIGHT CONCRETE BLOCKS	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-											
	AERATED CONCRETE	✓	✓	✓	✓	✓	-	-	-	✓	-	-	-	-											
	PLASTERBOARD	-	-	✓	✓	✓	-	-	-	-	✓	-	-	✓	✓										
	APPROVALS	ETA CE	✓	✓	-	-	-	✓	-	✓	-	-	-	-	-										
		UB	✓	✓	-	-	-	✓	-	-	-	-	-	-	-										
		ISEM	-	-	-	-	-	-	-	-	-	-	-	-	-										
DESIGN TENSION AND SHEAR LOADS IN kN	[kN]	Ø8	Ø8	Ø10	Ø10	Ø5	Ø5	Ø5	Ø5		Ø6	Ø6	Ø5-6	Ø5-6	Ø5-8	Ø5-6	Ø13	Ø13	Ø10	Ø6	Ø7.5	Ø7.5		Ø4-6	Ø4-6
	0.2																								
	0.4																								
	0.6		Ø14																						
	0.8																								
	1.0																								
	1.2																								
	1.4																								
	1.6																								
	1.8			Ø10																					
	2.0																								
2.2																									
2.4																									
2.8		Ø14																							
3.2																									

R-FF1 UNIVERSAL FRAME FIXING

3 types of screw:

- carbon steel zinc-plated
- carbon steel zinc-flake-coated
- A4 stainless steel



2 types of head:

- hexagonal with collar
- and countersunk with T30 or T40 recess



Internal plug geometry
designed to fit the screw head

Internal plug geometry
designed to fit the screw head and ensures multi-axis expansion.

Unique design ensures the highest parameters in a wide range of substrates according to **ETAG 020 (A, B, C, D)**

2 types of plug:

- collared
- countersunk

Nylon plug with **4 way expansion**

Two anchoring depths - 50/70 mm for flawless installation in a variety of substrates

R-FSS SPEED OF WORK VERSATILITY!


Hexagonal head
with collar

R90 fire resistance and A1
fire classification allow the
product to be used in the
most demanding assembly
applications

Minimized
installation time
- only 40 mm



A unique anchoring zone
guarantee achievement of the
highest technical parameters
for professional applications

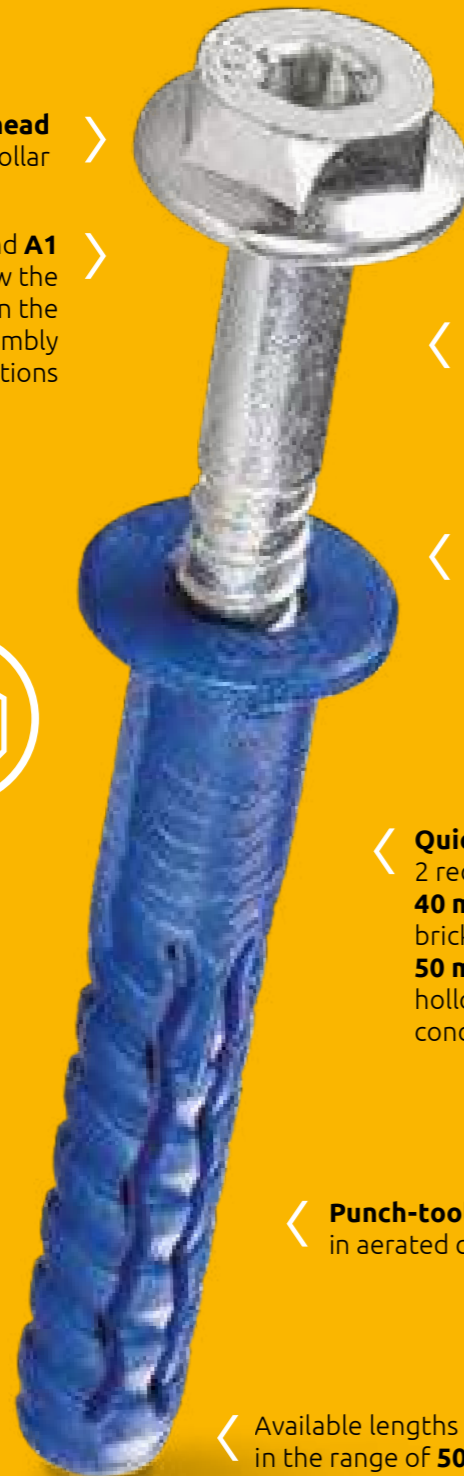

High shear strength thanks
the use of steel grade 6.8

Frame fixing with collar designed
for fixing the façade ventilated and
window frames

Quick installation thanks
2 reduced anchoring depths:
40 mm in concrete and solid
brick* (categories A and B*)
50 mm in substrates with
hollow brick and aerated
concrete(categories C and D)

Punch-tool to increase a performance
in aerated concrete

Available lengths
in the range of 50 - 120 m

R-FSS FRAME FIXING WITH THE SHORTEST ANCHORING ZONE

QUICK ASSEMBLY, THANKS TO TWO REDUCED ANCHORING DEPTHS



1 SPEED +40%

The shortest anchoring depth limited to 40mm in solid materials ensures shortening of the holes drilling time and cost effectiveness due to the shortening of the length of the drill bits necessary for drilling. In addition, the option of using a punch-tool reduces assembly time by 40%.

3 SECURITY

The new R-FFS Rawplug fixing not only meets all the requirements of laboratory tests, but also works in the toughest construction conditions. Thanks to the technical parameters confirmed in ETA and fire resistance R90 is a solution recommended for the most demanding building connections.

2 VERSATILITY

The innovative design of the expansion zones enables work in all typical substrates (A, B, C, D). This allows the use of one type of fastener for mounting the sub-structure of ventilated façades, regardless of the amount of application - both in reinforced concrete construction and solid or hollow masonry substrates.

4 HIGH STRENGTH

High shear strength thanks to the thickened screw and the use of steel grade 6.8. This is particularly important when installing ventilated façades and other structures that are exposed to shear forces.

INSTALLATION IN CONCRETE AND OTHER MATERIALS (A, B, C, D)



* in preparation

INSTALLATION WITH TOOL IN AERATED CONCRETE BASE



R-FFS FRAME FIXING WITH COLLAR HEX HEAD

Universal frame fixing for many applications

NEW PRODUCT



R-FFS

FEATURES AND BENEFITS

- The optimal expansion zone guarantees high load capacities with a small anchoring depth
- Minimized installation time - only 40 mm in concrete
- High bending strength due to the use of a minimum 6.8 steel grade
- Quick assembly due to shallow drilling and the possibility of using the mallet in aerated concrete substrate
- Framefixing with a collar hex head for fixing ventilated façades and window frames
- The special polyamide formula give the highest parameters in all categories of substrates according to ETAG 020 (A, B, C, D)

APPLICATIONS

- Ventilated façades
- Window frames
- Balustrades and handrails
- Garage Doors
- Door frames
- Wooden constructions
- Satellite dishes
- Shelves

BASE MATERIALS

Approved for use in:

- Cracked concrete and Non-cracked concrete \geq C12/15 (Use category A)
- Clay brick (Use category B)
- Calcium silicate brick (Use category B)
- Perforated ceramic brick (Use category C)
- Hollow calcium silicate block (Use category C)
- Hollow lightweight aggregate (Use category D)
- Autoclaved aerated concrete (Use category D)

APPROVALS AND REPORTS

- ETA-18/0818



VERSION

- ZP (Zinc-plated steel)



Size	Rawplug code	Plug		Screw		Fixture			Quantity	
		Diameter	Length	Diameter	Length	Max. thickness		Hole diameter	Box	Outer
						$t_{fix, hef} = 40mm$	$t_{fix, hef} = 50mm$			
mm	mm	mm	mm	mm	mm	mm	pcs	pcs		
Ø10	R-FFS-10K050	10	50	7	59	10	-	12,5	50	800
	R-FFS-10K060	10	60	7	69	20	10	12,5	50	600
	R-FFS-10K080	10	80	7	89	40	30	12,5	50	400
	R-FFS-10K100	10	100	7	109	60	50	12,5	25	300
	R-FFS-10K120	10	120	7	129	80	70	12,5	25	300

R-FF1-CAP MASKING CAP FOR R-FF1 AND R-FFS FRAME FIXINGS

Cover cap for aesthetic installation of frame fixings with the SW13 head size, available in many colour versions



FEATURES AND BENEFITS

- Aesthetic finishing after installation of R-FF1 and R-FFS frame fixings
- Many colour versions to optimize aesthetic installation effect


APPLICATIONS

- Door and window frames

Rawplug code	Colour RAL	Plug		Quantity		
		Diameter	Box	Outer	Box	Outer
R-FF1-CAP-1001	1001	19.6	50	50		
R-FF1-CAP-6020	6020	19.6	50	50		
R-FF1-CAP-7024	7024	19.6	50	50		
R-FF1-CAP-7035	7035	19.6	50	50		
R-FF1-CAP-7043	7043	19.6	50	50		
R-FF1-CAP-8017	8017	19.6	50	50		
R-FF1-CAP-9002	9002	19.6	50	50		
R-FF1-CAP-9005	9005	19.6	50	50		
R-FF1-CAP-9016	9016	19.6	50	50		

UNO® UNIVERSAL PLUG

Truly universal plug which fixes into any base material, solid or hollow



UNO®

FEATURES AND BENEFITS

- Unique geometry guarantees maximum expansion and grip with various screw's diameter
- Instant grip resulting from split plug design
- Anti-rotation features prevent spinning in the hole
- Lip prevents plug slipping into over-sized holes
- Reccomended for uncertain substrates, irregular or worn-out holes
- Short length enables effective installation in thin walls ("partition walls")




APPLICATIONS

- Suspended ceilings
- Electrical fittings
- Cable trays
- Boilers
- Radiators
- Lighting
- Bathroom fittings

BASE MATERIALS

Suitable for use in:

- Concrete
- Hollow-core Slab
- High-Density Natural Stone
- Solid Brick
- Solid Sand-lime Brick
- Hollow Brick
- Vertically-perforated clay block
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block
- Plasterboard



Rawplug code	Plug		Quantity	
	Diameter	Length	Box	Outer
UNO-K-05	5	24	200	6400
UNO-K-06	6	28	200	6400
UNO-K-07	7	30	100	3200
UNO-K-08	8	32	100	3200
UNO-K-10	10	36	50	1600

UNO® UNIVERSAL PLUG WITH SCREW

Truly universal plug which fixes into any base material, solid or hollow



UNO®

FEATURES AND BENEFITS

- Unique geometry guarantees maximum expansion and grip with various screw's diameter
- Instant grip resulting from split plug design
- Anti-rotation features prevent spinning in the hole
- Lip prevents plug slipping into over-sized holes
- Reccomended for uncertain substrates, irregular or worn-out holes
- Short length enables effective installation in thin walls ("partition walls")

APPLICATIONS

- Suspended ceilings
- Electrical fittings
- Cable trays
- Boilers
- Radiators
- Lighting
- Bathroom fittings


BASE MATERIALS

Suitable for use in:

- Concrete
- Hollow-core Slab
- High-Density Natural Stone
- Solid Brick
- Solid Sand-lime Brick
- Hollow Brick
- Vertically-perforated clay block
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block
- Plasterboard



UNO® UNIVERSAL PLUG WITH SCREW (cont.)

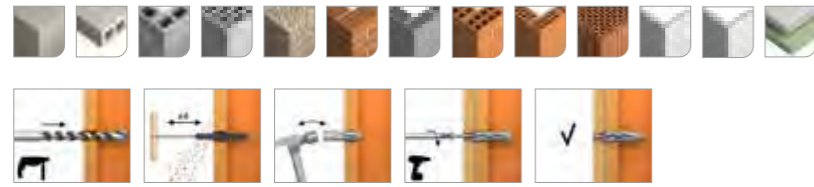

Rawplug code	Plug		Screw		Quantity	
	Diameter	Length	Diameter	Length	Box	Outer
	mm	mm	mm	mm	pcs	pcs
UNO-05+330	5	24	3	30	100	3200
UNO-06+430	6	28	4	30	100	3200
UNO-06+435	6	28	4	35	100	3200
UNO-06+445	6	28	4	45	100	3200
UNO-08+435	8	32	4.5	35	100	1600
UNO-08+450	8	32	4.5	50	100	1600
UNO-08+560	8	32	5	60	100	1600
UNO-10+540	10	36	5	40	100	1600
UNO-10+650	10	36	6	50	100	1600
UNO-10+660	10	36	6	60	100	1600

4ALL UNIVERSAL NYLON PLUG

High performance nylon plug for all types of substrates



FEATURES AND BENEFITS

- Unique internal design provides positive grip for screws
- Rib detail at plug head provides added grip
- Expanding section designed to collapse in hollow materials and provide positive grip behind surfaces
- Unique 4 way expansion combined with dedicated material allows application in any type of substrate
- Solid head design provides strength whilst plug is installed
- Anti-rotational lugs promote grip in wide range of substrates including soft masonry materials

APPLICATIONS

- Lighting
- Wall cabinets
- Wardrobes
- Letterboxes
- TV brackets
- Bathroom fittings
- Electrical fittings
- Shelves

BASE MATERIALS


Suitable for use in:

- Concrete
- Hollow-core Slab
- High-Density Natural Stone
- Solid Brick
- Hollow Brick
- Vertically-perforated clay block
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block
- Plasterboard

APPROVALS AND REPORTS




Installation guide movie



Rawplug code	Plug		Fixture	Quantity	
	Diameter	Length	Hole diameter	Box	Outer
	mm	mm	d _f	pcs	pcs
4ALL-05	5	25	3,0 - 4,0	100	3200
4ALL-06	6	30	4,0 - 5,0	100	3200
4ALL-06050	6	50	4,0 - 5,0	50	3200
4ALL-08	8	40	4,5 - 6,0	100	1600
4ALL-08065	8	65	4,5 - 6,0	50	1600
4ALL-10	10	50	6,0 - 9,0	50	800
4ALL-12	12	60	8,0 - 10,0	20	640
4ALL-14	14	70	10,0 - 12,0	10	320

4ALL UNIVERSAL NYLON PLUG WITH SCREW

High performance nylon plug with screw for all types of substrates

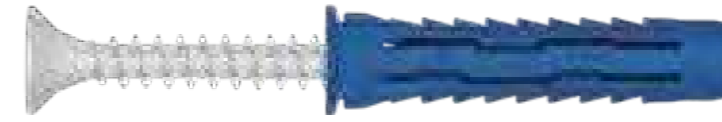

4ALL

FEATURES AND BENEFITS

- Unique internal design provides positive grip for screws
- Rib detail at plug head provides added grip
- Expanding section designed to collapse in hollow materials and provide positive grip behind surfaces
- Unique 4 way expansion combined with dedicated material allows application in any type of substrate
- Solid head design provides strength whilst plug is installed
- Anti-rotational lugs promote grip in wide range of substrates including soft masonry materials

APPLICATIONS


- Lighting
- Wall cabinets
- Wardrobes
- Letterboxes
- TV brackets
- Bathroom fittings
- Electrical fittings
- Shelves

BASE MATERIALS


Suitable for use in:

- Concrete
- Hollow-core Slab
- High-Density Natural Stone
- Solid Brick
- Hollow Brick
- Vertically-perforated clay block
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block
- Plasterboard

APPROVALS AND REPORTS



Installation guide movie



Rawplug code	Plug		Screw		Fixture		Quantity	
	Diameter	Length	Diameter	Length	Max. thickness	Hole diameter	Box	Outer
	mm	mm	mm	mm	t _{fix}	d _f	pcs	pcs
4ALL-05+3530	5	25	3.5	30	10	4	50	1600
4ALL-06+4540	6	30	4.5	40	10	5	50	1600
4ALL-06050+4560	6	50	4.5	60	10	5	50	1600
4ALL-08+5060	8	40	5	60	20	6	50	800
4ALL-08065+5080	8	65	5	80	15	6	50	1200
4ALL-10+6060	10	50	6	60	10	7	25	400
4ALL-12/80	12	60	8	80	20	9	10	160
4ALL-12/100	12	60	8	100	40	9	10	160
4ALL-14/100	14	70	10	100	30	11	10	160

R-RNT RAWLNUT FLEXI PLUG

Easy-to-install plug giving exceptional resistance to vibration and corrosion



FEATURES AND BENEFITS

- Resistant to vibration and corrosion
- Ideal for unknown substrates and irregular or oversized holes
- Rubber flange sets flush at the surface which guarantee tight fixing
- Made from synthetic rubber (EPDM) for more severe corrosion environment
- Bonded brass insert

APPLICATIONS

- Pictures
- Lighting
- Shelves
- Trunking
- Cable trays
- Electrical fittings

BASE MATERIALS

Suitable for use in:

- Solid Brick
- Hollow Brick
- Vertically-perforated clay block
- Aerated Concrete Block
- Plasterboard
- Chipboard
- Plastic

R-RNT RAWLNUT FLEXI PLUG (cont.)



Rawplug code	Plug			Quantity	
	Drill size	Screw	Length	Box	Outer
	mm		mm	pcs	pcs
RAWLNUT Flexi Plug					
R-RNT-M4/12	8	M4	12.6	50	900
R-RNT-M4/24	8	M4	24.0	50	900
R-RNT-M5/14	10	M5	14.0	50	900
R-RNT-M5/26	10	M5	26.0	50	900
R-RNT-M6/16	13	M6	16.0	50	900
R-RNT-M6/27	13	M6	26.7	50	900
R-RNT-M6/35	13	M6	35.0	50	900
R-RNT-M6/50	13	M6	50.0	50	900
R-RNT-M8/28	16	M8	28.0	50	900
R-RNT-M8/30	18	M8	30.0	50	900
R-RNT-M8/50	18	M8	50.0	50	900
R-RNT-M10/55	20	M10	55.0	25	360
R-RNT-M12/80	24	M12	78.0	20	360
RAWLNUT Flexi Plug with Screw					
R-RNT-M4X20	8	M4x20	12.6	50	900
R-RNT-M4X30	8	M4x30	24.0	50	900
R-RNT-M5X40-50	10	M5x50	39.8	50	900

GS CEILING WEDGE ANCHOR

Ceiling wedge anchor



FEATURES AND BENEFITS


- During installation, when the nail is flush with the head, it signifies the complete expansion of the anchor
- The two hit zone ensure correct installation (especially in narrow drill holes) and high safety in use
- Approved for installation in cracked and non-cracked concrete
- Fire resistance class A1
- Reliable setting thanks to the simple visual check
- Impact expansion by hammer, no setting tool is needed

APPLICATIONS

- Installation of lightweight ceilings and suspended ceilings
- Installation of coffered ceilings
- Installation of conduit and pipe clamps and other MEP applications
- Ventilation systems
- Metal roof profiles
- Punched straps


BASE MATERIALS

- Approved for use in:**
- Cracked concrete C20/25-C50/60
 - Non-cracked concrete C20/25-C50/60



APPROVALS AND REPORTS

- ETA-11/0268



Rawplug code	Anchor		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-GS-06040	6	40	100	2000
R-GS-06065	6	65	100	1000

R-FX-N-C NYLON HAMMER-IN FIXING WITH CYLINDER HEAD

The nylon hammer fixing with cylinder head for fast, simple, cost-effective installations



FX-N-C

FEATURES AND BENEFITS

- Rapid hammer-set installation reduces the time required and allows for cost-effective, high-volume installation
- Cylinder head prevents plug slipping into over-sized holes and allows fix thin elements
- Combination of PH recess and the helical thread makes removal of the nail possible, facilitating disassembly when necessary
- The extensive range of product lengths, diameters and head types ensures availability of the correct fixing for every scenario
- Designed for push-through installation

APPLICATIONS

- Timber or metal battens
- Drywall structures
- Skirting / Dado railing
- Cable clamps
- Pipe clamps

BASE MATERIALS

Approved for use in:

- Concrete
- Solid Brick
- Solid Sand-lime Brick
- Hollow Sand-lime Brick
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block

APPROVALS AND REPORTS

- ETA-12/0457



Rawplug code	Plug		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-FX-N-05C030	4.9	30	100	2400
R-FX-N-05C035	4.9	35	100	3200
R-FX-N-05C050	4.9	50	100	2400
R-FX-N-06C035	5.9	35	100	1600
R-FX-N-06C040	5.9	40	100	1600
R-FX-N-06C045	5.9	45	100	1600
R-FX-N-06C060	5.9	60	100	1200
R-FX-N-06C080	5.9	80	100	1200
R-FX-N-08C045	7.9	45	100	1200
R-FX-N-08C060	7.9	60	100	1200
R-FX-N-08C080	7.9	80	50	600
R-FX-N-08C100	7.9	100	50	600
R-FX-N-08C120	7.9	120	50	600
R-FX-N-08C140	7.9	140	50	600
R-FX-N-08C160	7.9	160	50	600

R-FX-N-K NYLON HAMMER-IN FIXING WITH MUSHROOM HEAD

The nylon hammer fixing with mushroom head for fast, simple, cost-effective installations



FX-N-K

FEATURES AND BENEFITS

- Rapid hammer-set installation reduces the time required and allows for cost-effective, high-volume installation
- Cylinder head prevents plug slipping into over-sized holes and allows fix thin elements
- Combination of PH recess and the helical thread makes removal of the nail possible, facilitating disassembly when necessary
- The extensive range of product lengths, diameters and head types ensures availability of the correct fixing for every scenario
- Designed for push-through installation

APPLICATIONS

- Timber or metal battens
- Drywall structures
- Skirting / Dado railing
- Cable clamps
- Pipe clamps

BASE MATERIALS

Approved for use in:

- Concrete
- Solid Brick
- Solid Sand-lime Brick
- Hollow Sand-lime Brick
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block

APPROVALS AND REPORTS

- ETA-12/0457



R-FX-N-K NYLON HAMMER-IN FIXING WITH MUSHROOM HEAD (cont.)



Rawplug code	Plug		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-FX-N-06K040	5.9	40	100	1600
R-FX-N-06K060	5.9	60	100	1200
R-FX-N-06K080	5.9	80	100	1200

R-FX-N-L NYLON HAMMER-IN FIXING WITH COUNTERSUNK HEAD

The nylon hammer fixing with countersunk head for fast, simple, cost-effective installations



FX-N-L

FEATURES AND BENEFITS

- Rapid hammer-set installation reduces the time required and allows for cost-effective, high-volume installation
- Cylinder head prevents plug slipping into over-sized holes and allows fix thin elements
- Combination of PH recess and the helical thread makes removal of the nail possible, facilitating disassembly when necessary
- The extensive range of product lengths, diameters and head types ensures availability of the correct fixing for every scenario
- Designed for push-through installation

APPLICATIONS

- Timber or metal battens
- Drywall structures
- Skirting / Dado railing
- Cable clamps
- Pipe clamps

BASE MATERIALS

Approved for use in:

- Concrete
- Solid Brick
- Solid Sand-lime Brick
- Hollow Sand-lime Brick
- Lightweight Concrete Block
- Hollow Lightweight Concrete Block
- Aerated Concrete Block

APPROVALS AND REPORTS


- ETA-12/0457



Rawplug code	Plug		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-FX-N-05L025	5	25	100	2400
R-FX-N-05L030	5	30	100	2400
R-FX-N-05L035	5	35	100	2400
R-FX-N-05L040	5	40	100	2400
R-FX-N-05L050	5	50	100	2400
R-FX-N-06L035	6	35	100	2400
R-FX-N-06L040	6	40	100	1600
R-FX-N-06L050	6	50	100	1200
R-FX-N-06L060	6	60	100	1200
R-FX-N-06L080	6	80	100	1200
R-FX-N-08L045	8	45	100	1200
R-FX-N-08L060	8	60	100	1200
R-FX-N-08L080	8	80	50	600
R-FX-N-08L100	8	100	50	600
R-FX-N-08L120	8	120	50	600
R-FX-N-08L140	8	140	50	600
R-FX-N-08L160	8	160	50	600

R-DRA NYLON SELF DRILL FIXING FOR PLASTERBOARD

Nylon self-drill plasterboard fixing

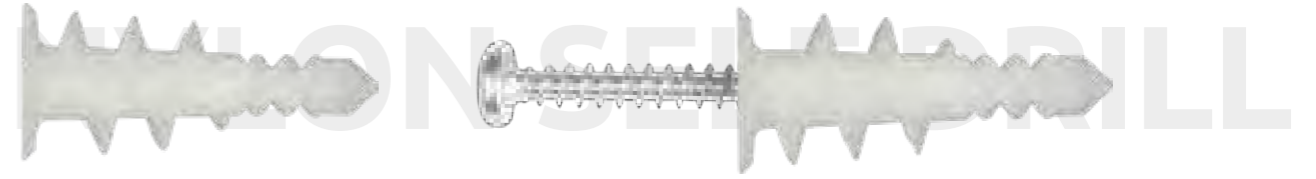

FEATURES AND BENEFITS

- Very durable nylon material with fibre glass and special drilling point guarantees fast installation
- Flange prevents accidental pull through in plasterboard
- Can be used in single and double thickness plasterboard
- Short length ideally suited for dry lined walls
- Installation with a standard screwdriver means that no special tools are necessary
- Recommended screw diameter: 3.5 - 4.2 mm

APPLICATIONS

- Sockets, light switches and other electrical fittings
- Shelves and bathroom accessories on standard plasterboard.
- Installation of ceiling fixtures, such as light fittings
- Light shelving, brackets and hooks
- Pictures
- Wood battens

BASE MATERIALS

Suitable for use in:


- Plasterboard
- Gypsum fibreboards



Rawplug code	Plugw		Screw		Quantity	
	Diameter	Length	Diameter	Length	Box	Outer
	mm	mm	mm	mm	pcs	pcs
R-DRA-01	14	36	-	-	100	1800
R-DRA-01PLUS	14	36	3.9	32	100	1600

R-DRAM METAL SELF DRILL FIXING FOR PLASTERBOARD

Metal self-drive plasterboard fixing

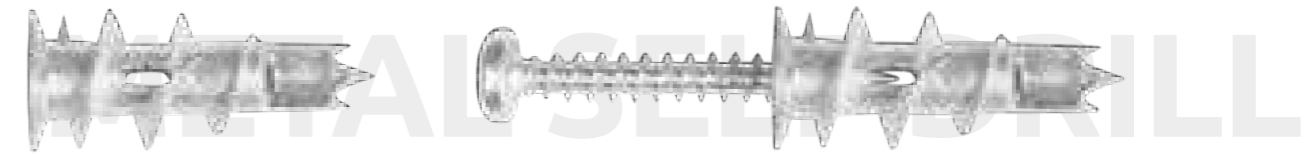

FEATURES AND BENEFITS

- Flange prevents accidental pull through in plasterboard
- Can be used in single and double thickness plasterboard
- Short length ideally suited for dry lined walls
- No drill required - simply pierce paper skin and screw home
- Ideal for use with either a power or manual PZ screwdriver in hard surface of base materials
- Must only be used with screws provided

APPLICATIONS

- Fixing electrical boxes, sanitary ware, cable trunking, etc.
- Shelves and bathroom accessories on standard plasterboard
- Sockets, light switches and other electrical fittings
- Light shelving, brackets and hooks
- Timber or metal battens
- Pictures

BASE MATERIALS

Suitable for use in:

- Plasterboard
- Gypsum fibreboards
- Chipboard
- Oriented Strand Board
- Aerated Concrete Block



Rawplug code	Plug		Screw		Quantity	
	Diameter	Length	Diameter	Length	Box	Outer
	mm	mm	mm	mm	pcs	pcs
R-DRA-02	13	31	-	-	100	3200
R-DRA-02PLUS	13	31	4.2	32	100	1600

R-SM INTERSET HOLLOW WALL ANCHOR

Inter-set fixing for permanent anchorages in cavity walls. Zinc-plated metal fixing with metric screw



FEATURES AND BENEFITS

- Due to extensive range the SM INTERSET is suitable for board building materials with a thickness 2-38mm, it allows for a number of different applications
- The fixing can be installed using normal screwdriver, or installation pliers
- One piece stamping, with integral thread and flange for increased reliability
- Hinged legs designed to maximise load-bearing capacity in single or double thickness plasterboard
- Large contact area of expanded arms increases load-bearing capacity and security
- Integral anti-rotation lugs
- Fixtures can be removed and re-fitted
- Combination head screw supplied

APPLICATIONS

- Shelves and bathroom accessories on standard plasterboard
- Radiators and kitchen cabinets on double thickness and tiled plasterboard
- Pictures
- Lamps
- Towel rails and curtain rails
- Mirrors

BASE MATERIALS

Suitable for use in:

- Plasterboard
- Chipboard
- Oriented Strand Board



APPROVALS AND REPORTS



Rawplug code	Anchor			Quantity	
	Drill size	Size	Wall thickness	Box	Outer
	mm	mm	mm	pcs	pcs
R-SM-04020	8	M4x20	2-5	100	3200
R-SM-04032	8	M4x32	2-10	100	3200
R-SM-04038	8	M4x38	8-15	100	1600
R-SM-04046	8	M4x46	15-21	100	1600
R-SM-04059	8	M4x59	34-38	100	1600
R-SM-05037	10	M5x37	5-13	100	1600
R-SM-05052	10	M5x52	6-16	100	1600
R-SM-05065	10	M5x65	15-28	100	1200
R-SM-06037	12	M6x37	8-12	100	1200
R-SM-06052	12	M6x52	13-15	100	1200
R-SM-06065	12	M6x65	15-28	50	600
R-SM-06080	12	M6x80	32-35	50	600
R-SM-08080	16	M8x80	32-35	50	600
Screw with angle hook					
R-SM-04032K	8	M4x32	2-10	100	1800
Screw with round hook					
R-SM-04032S	8	M4x32	2-10	100	1800

R-AT TOOL FOR INTERSET

Setting tool for easy setting of Inter-set cavity fixings



FEATURES AND BENEFITS

- Setting tool used to pull the screw head and expanding the fixing body of inter-set cavity fixings
- No screwdriver needed for installation


APPLICATIONS

- Shelves and bathroom accessories on standard plasterboard
- Light shelving, brackets and hooks

Rawplug code	Quantity	
	Box	Outer
	pcs	pcs
R-AT-88RAWL	1	30

R-SPO SPRING TOGGLE

Spring toggle single or double thickness plasterboard and large fixtures



FEATURES AND BENEFITS

- The long threaded rod of the toggle fixings allows for use with different board thickness and thick attachments, offers maximum flexibility
- The wide transition beams ensure a good load distribution. This achieves a high load-bearing capacity
- Allows easy installation for fastenings behind thick panels in very flat cavities
- Self-acting anchor with easy installation
- Suitable for overhead applications


APPLICATIONS

- Light shelving
- Brackets, grips and hooks
- Paintings
- Lamps
- Lighting
- Mirrors
- Other decorative elements

BASE MATERIALS

Suitable for use in:

- Plasterboard
- Chipboard
- Oriented Strand Board
- Plastic



Rawplug code	Anchor		Quantity	
	Size	Drill size	Box	Outer
	mm	mm	pcs	pcs
R-SPO-03050	M3x50	12	100	1600
R-SPO-05050	M5x50	14	100	100
R-SPO-05080	M5x80	14	100	100
R-SPO-06060	M6x60	18	50	50
R-SPO-06080	M6x80	18	50	50

TAP-IT HAMMER-IN FIXING FOR PLASTERBOARD

Metal fixing for plasterboard



FEATURES AND BENEFITS

- Steel fixing for medium and heavy weights
- Simple installation due to introductory thread
- Corrugated tip simplifies installation without previous drilling
- Expanding construction of the fixing prevents spinning in the substrate during installation
- Flat head enables leveling fixing with the surface of the substrate
- Simple removal without harming the substrate

APPLICATIONS

- Sanitary appliances
- Wardrobes
- Curtain rods support
- Shelves support
- Heaters
- Convector heaters
- Kitchen appliances

BASE MATERIALS

Suitable for use in:

- Plasterboard



Rawplug code	Plug	Screw	Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-GPB	10,5x30	-	100	1600
R-GPB-PLUS	10,5x30	4,0x40	100	1600

R-O METAL FRAME ANCHOR

Metal frame anchor for window and door installation



FEATURES AND BENEFITS

- Metal sleeve design guards against distortion of the frame
- Anti-rotation lugs prevent rotation during tightening
- All-steel construction for strength and durability
- Quick and easy installation
- The cover caps (available separately) can be used to discreetly cover the head of anchor



APPLICATIONS

- Door and window frames

BASE MATERIALS

- Approved for use in:**
- Reinforced concrete
 - Concrete

Also suitable for use in:

- Natural Stone



Rawplug code	Anchor		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-O-10072	10	72	100	1200
R-O-10092	10	92	100	100
R-O-10112	10	112	100	100
R-O-10132	10	132	100	100
R-O-10152	10	152	100	100
R-O-10182	10	182	100	100
R-O-10202	10	202	100	100

R-WHO FRAME SCREWS

Special frame screws for window and door installation



FEATURES AND BENEFITS

- Flat head for the comfortable installation in metal window and door frames
- No additional plugs required, making the WHO screw a user-friendly and time-efficient fixing solution
- Expansion-free fixing imposes less stress on substrate during installation
- High load resistances from a relatively small hole diameter
- Easily removed for temporary works



APPLICATIONS

- Door and window frames
- Securing formwork
- Suspended ceilings
- Lightweight steel angles
- Timber constructions

BASE MATERIALS

- Approved for use in:**
- Concrete
 - Solid Brick
 - Hollow Brick
 - Aerated Concrete Block

Also suitable for use in:

- Natural Stone
- Hollow-core Slab
- Timber



Rawplug code	Screw			Quantity	
	Drill size	Diameter	Length	Box	Outer
	mm	mm	mm	pcs	pcs
R-WHO-75052	6	7,5	52	100	1600
R-WHO-75072	6	7,5	72	100	1600
R-WHO-75092	6	7,5	92	100	100
R-WHO-75112	6	7,5	112	100	100
R-WHO-75132	6	7,5	132	100	100

WHO FRAME SCREWS (cont.)

Rawplug code	Screw			Quantity		
	Drill size	Diameter	Length	Box	Outer	Pallet
	mm	mm	mm	pcs	pcs	pcs
R-WHO-75152	6	7,5	152	100	100	36400
R-WHO-75182	6	7,5	182	100	100	36400
R-WHO-75202	6	7,5	202	100	100	27300
R-WHO-75212	6	7,5	212	100	100	27300

R-KMW METAL HAMMER FIXING

For light duty fixings of metal constructions and sheet metal to solid building materials



FEATURES AND BENEFITS

- Drawn elements shouldn't be used for suspension (bars, verniers) due to non-axial lift load of the linkage
- Low-profile mushroom head provides a nice finish and tamper proof fastening
- Consistent load values ensure safe light-duty fastenings in concrete and masonry
- Suitable for use in fire-rated applications
- Impact expansion by hammer, no setting tool is needed.
- Designed for easy push-through fastenings, even in bottomless holes

APPLICATIONS

- Metal roof profiles
- Pipework
- Cable trays
- Cable conduits and wires
- Cladding and paneling

BASE MATERIALS

- Approved for use in:**
- Non-cracked concrete C20/25-C50/60

Also suitable for use in:


- Concrete Slab
- Solid Brick
- Solid Concrete Block



Rawplug code	Anchor		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-KMW-06040	6	40	100	1600

R-ISO-PLUG INSULATION FIXINGS

For fastening lightweight fixtures on insulated façades

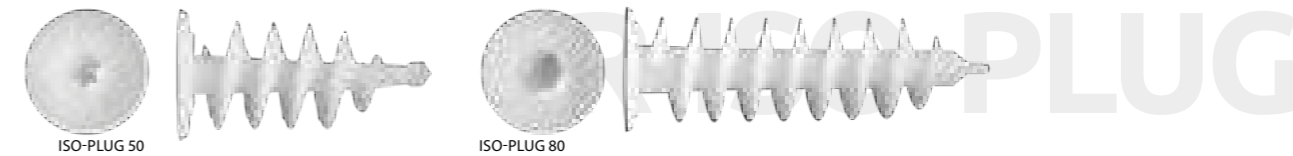

FEATURES AND BENEFITS

- No thermal bridging.
- Can be installed with commercial drill/drive tool.
- The geometry of the R-ISO-PLUG allows for a simple installation in thin layers of plaster, without the need for pre-drilling, thus saving a stage of installation
- Fixtures are fixed with a 4 - 4.5mm screw

APPLICATIONS


- Façade construction (ETICS)
- Attachments to insulation
- Lightweight recycled panels
- Electrical fittings
- Refrigeration and climate control

BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) boards
 - Mineral Wool Boards



Rawplug code	Fixing Length [mm]	Recommended screw diameter	Quantity [pcs]		
			Box	Outer	Pallet
R-ISO-PLUG-50	55	4.0 - 5.0	50	600	14400
R-ISO-PLUG-80	85	6.0 - 7.0	40	300	7680

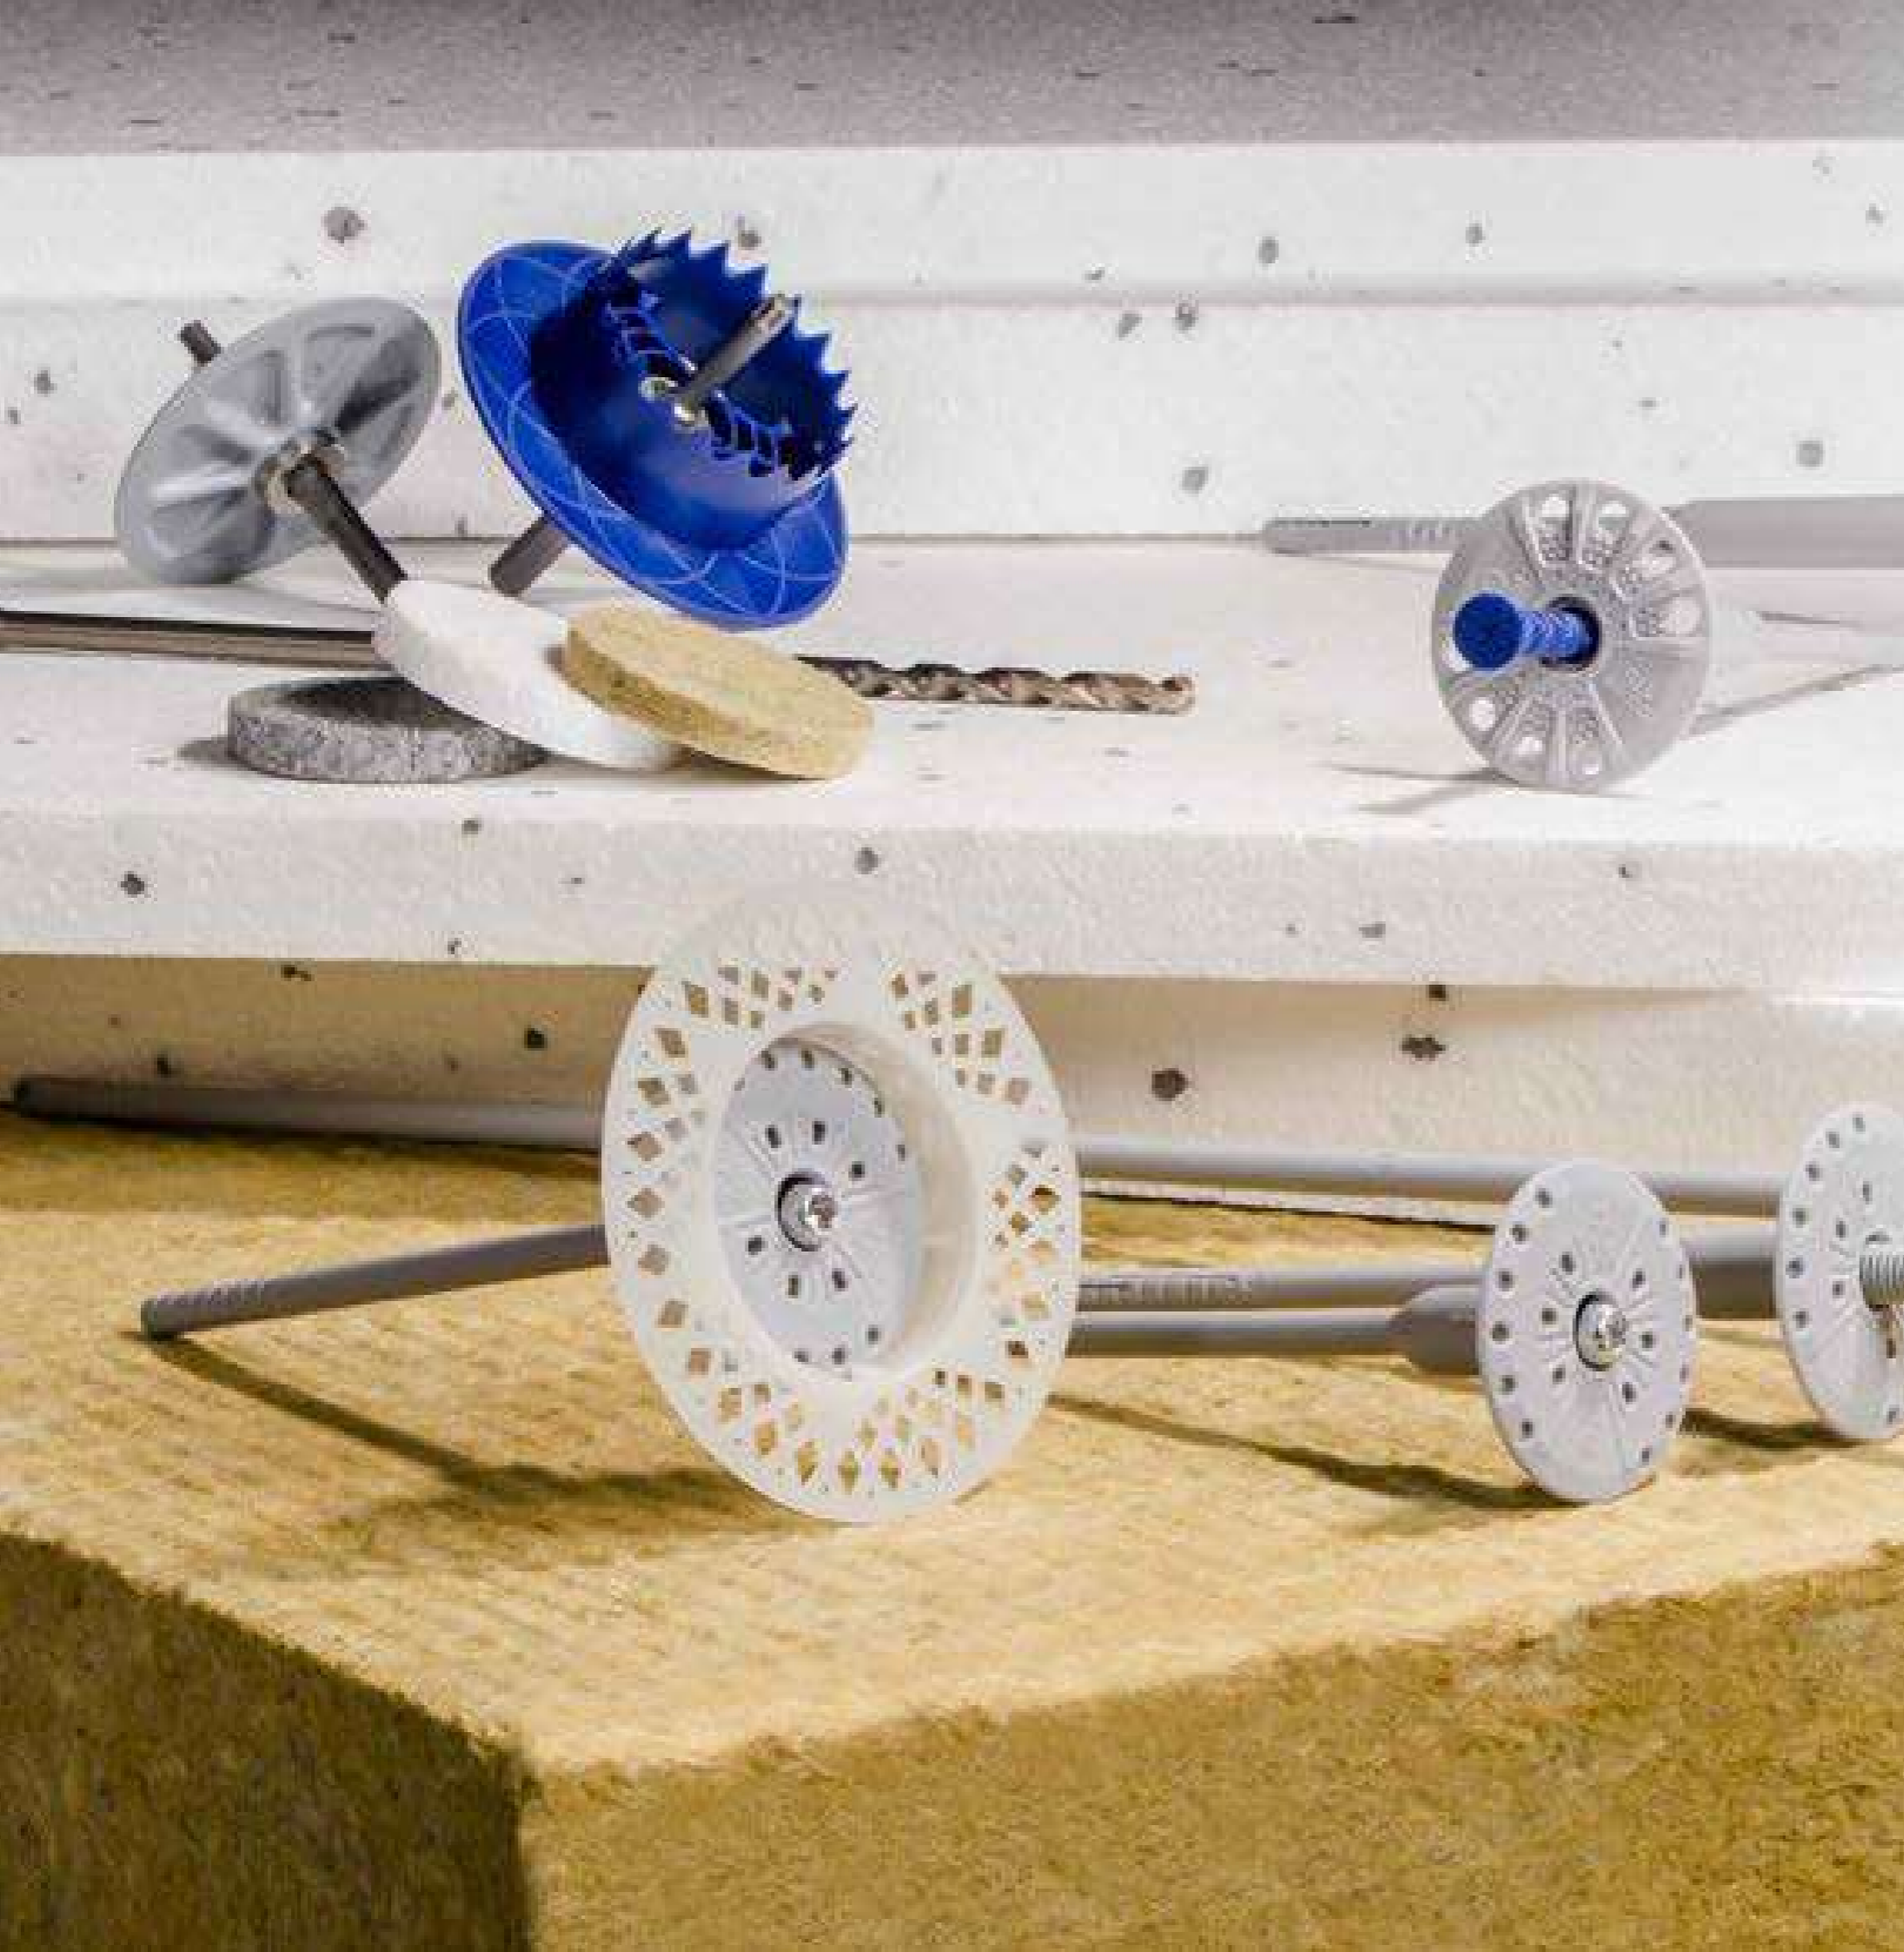

” Façade insulation fixings

Overview of façade fixings	260
Screw-in façade fixings	262
Hammer-in façade fixings	266
Washers	271
Façade insulation accessories	276

FAÇADE INSULATION FIXINGS

INNOVATION AND ENERGY SAVING CONSTRUCTIONS

6 STEPS
TO CHOOSE THE OPTIMAL FAÇADE FIXING



RAWPLUG Academy

Use the e-learning training or sign up for our hands-on training.

- Façade fixings - general characteristics
- Façade fixings - product selection for applications

1 EXAMINING THE SUBSTRATE






2 SELECTION OF THE FIXING'S TYPE

3 SELECTION OF THE FIXING'S LENGTH


4 INSTALLATION PLANNING ACCORDING TO GUIDELINES

5 SELECTION OF DRILLING TECHNIQUE AND DRILL BITS

6 SELECTION OF ACCESSORIES

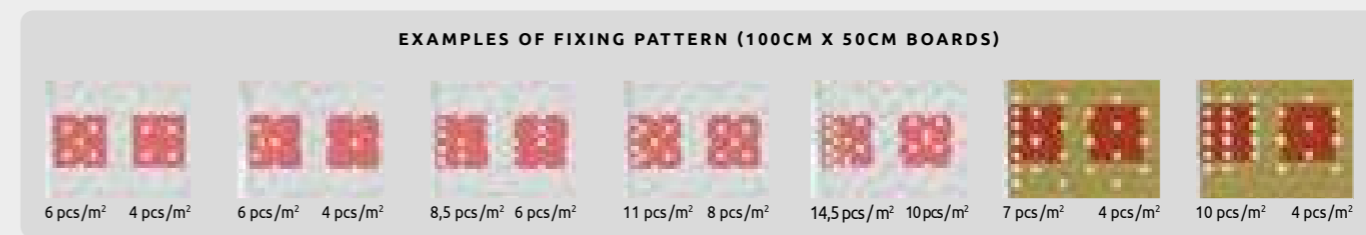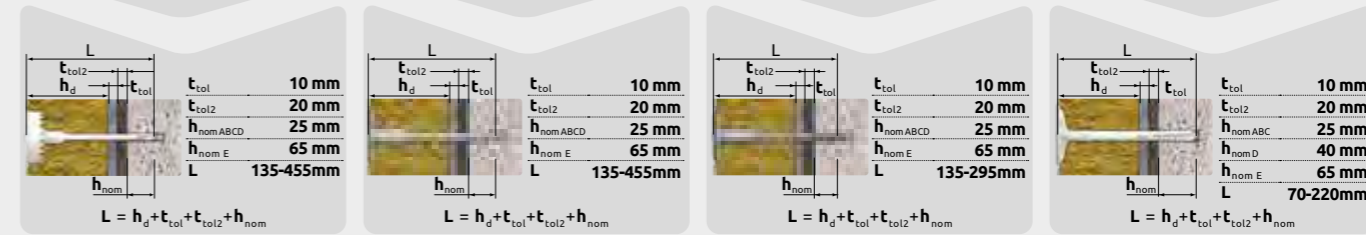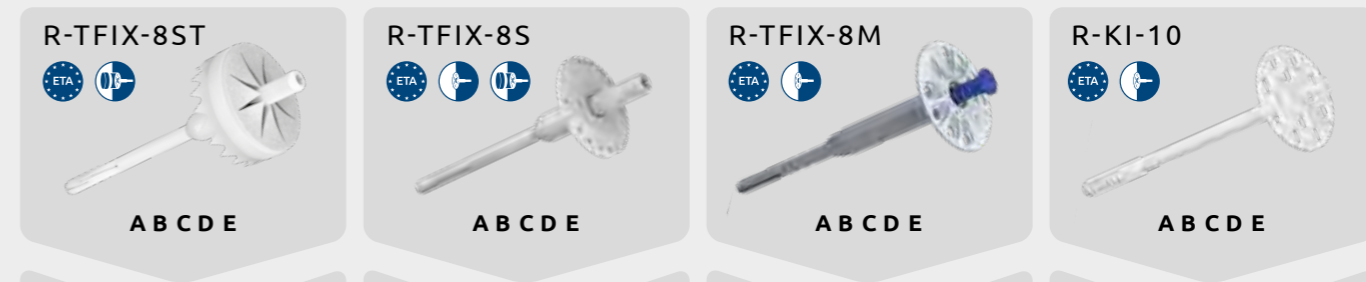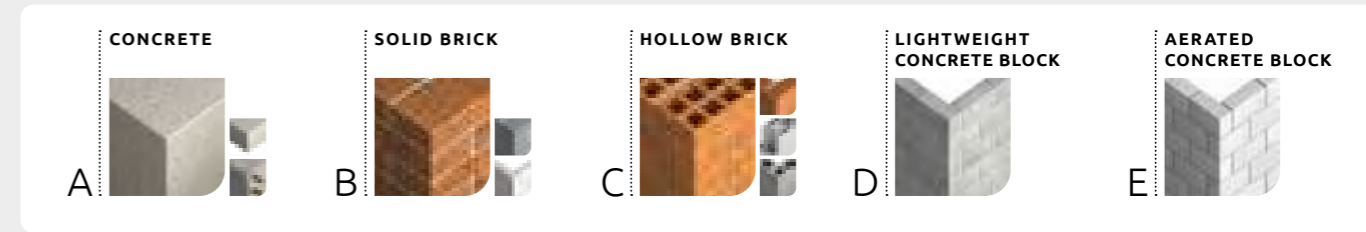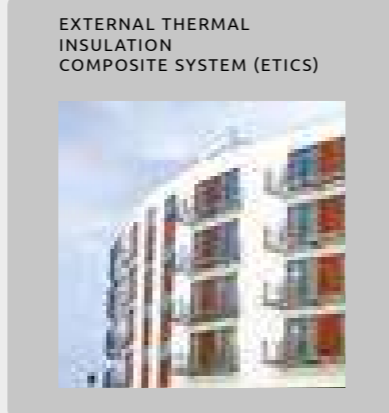

Drilling Type	Substrate	Drill Bit	Technique
A	Concrete	RT-SDSA	HAMMER DRILLING
B	Solid Brick	RT-SDSR	PERCUSSIVE DRILLING
C, D, E	Hollow Brick, Lightweight Concrete Block, Aerated Concrete Block	RT-SDSB	ROTARY DRILLING

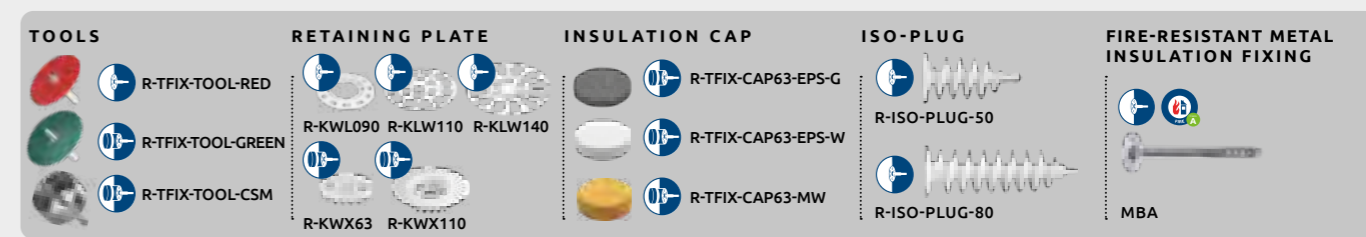

Overview of our range ✓



ETICS FIXINGS

Façade INSULATION FIXINGS		R-TFIX-8S	R-TFIX-8SX	TFIX-8ST	
INSULATION MATERIAL	EXTRUDED OR EXPANDED POLYSTYRENE	✓	✓	✓	
	MINERAL WOOL	✓	✓	✓	
	LAMELLA WOOL + HOLDING FLANGE			-	
	CORK BOARDS, WOOD FIBREBOARDS, LIGHTWEIGHT RECYCLED PANELS		✓	-	
SUBSTRATES	CONCRETE	A	✓ 1.5 kN	✓ 1.5 kN	✓ 1.2 kN
	SOLID BRICK, CALCIUMSILICATE BRICK, CONCRETE BLOCKS, STONE	B	✓ 1.5 kN	✓ 1.5 kN	✓ 1.2 kN
	HOLLOW BRICK, CHEQUER BRICK, CERAMIC HOLLOW BRICKS	C	✓ 0.9 kN	✓ 0.9 kN	✓ 0.75 kN
	LIGHTWEIGHT CONCRETE BLOCKS, E.G. LECA CONCRETE	D	✓ 0.6 kN	✓ 0.6 kN	✓ 0.6 kN
	AUTOCLAVED CELLULAR (GAS) CONCRETE	E	✓ 1.2 kN	✓ 1.2 kN	✓ 1.2 kN
	TIMBER, WOOD-BASED BOARDS		-	-	-
	TRAPEZOIDAL SHEET		-	-	-
Approvals and Reports			ETA 17/0161	ETA 17/0161	ETA 11/0144
CHARACTERISTICS	AVAILABLE LENGTHS [MM]	115, 135, 155, 175, 195, 215, 235, 255, 275, 295, 335, 355, 375, 395, 415, 435, 455	115, 135, 155, 175, 195, 215, 235, 255, 275, 295, 335, 355, 375, 395, 415, 435, 455	135, 155, 175, 195, 215, 235, 255, 275, 295, 335, 355, 375, 395, 415, 435, 455	
	THERMAL INSULATION THICKNESSES RANGE [MM]	60-420	60-420	60-420	
	DRILL DIAMETER [MM]	8	8	8	
	ANCHORAGE DEPTH (MM)	25 (65)	25 (65)	25 (65)	
	INSTALLATION TYPE	screw-in	screw-in	screw-in	
	ADDITIONAL INFORMATION		The best fastener for eVery fixing. 100% correct anchoring in all conditions. The best parameters, the most Versatile of professional fixings.	The best fastener for eVery fixing. 100% correct anchoring in all conditions. The best parameters, the most Versatile of professional fixings.	

Overview of our range ✓



INSULATION FIXINGS

R-TFIX-8M	TFIX 8P	MBA	R-KC	KCX	R-DB
✓	✓	✓	✓	✓	
✓	✓	✓	✓	✓	
✓	✓	✓	-	-	
✓ 1.2kN	✓ 0.5 kN	✓ 0.8 kN	-	✓ 1.5 kN	✓ 0.5 kN
✓ 1.2kN	✓ 0.5 kN	✓ 0.6 kN	-	-	
✓ 0.5-1.1 kN	✓ 0.3 kN	-	-	-	
✓ 0.5 kN	✓ 0.3 kN	-	-	-	
✓ 1.0 kN	✓ 0.5 kN	✓ 0.8 kN			
-	-	-	✓ 0.91kN	✓ 1.5 kN	
-	-	-	✓ 0.81 kN	✓ 1.5 kN	
ETA 17/0592	ETA-13/0845	KOT-2018/0721	KOT-2017-0345	AT-15-9280/2014	Zulassung: Z-21.8-2077
95, 115, 135, 155, 175, 195, 215, 235, 275, 295	95, 115, 135, 155, 175, 195, 215	MBA: 80, 110, 140, 170, 200, 240, 300, MBA-SS: 90, 110, 140, 170, 200, 250, 300	UC: 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 180, 200WB: 80, 100, 120, 140, 160, 170, 180, 200, 220	UC: 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 180, 200WB: 80, 100, 120, 140, 160, 170, 180, 200, 220	50, 75, 90, 100, 120, 140, 160, 180, 200, 220, 240, 260, 300
60 - 260	50-180	50 - 160	40 - 200	40-350	50-300
8	8	8	-	-	5.0
25 (65)	25 (65)	50	30	30	30
hammer set	hammer set	hammer set	screw-in	screw-in	screw-in
The best hammered-in fixing. Very good parameters with the simplest installation.	The economical fixing for bonded ETICS applications.	Non-flammable fixings for ETICS-requiring installations.	The best choice for timber, sheathing board and trapezoidal sheet.	The best choice for timber, sheathing board and trapezoidal sheet.	The best choice for timber, sheathing board and trapezoidal sheet.

THE MOST MULTIFUNCTIONAL FAÇADE FIXING

Robust screw head for easy dismantling



Long overmoulded piece or polystyrene cap ensure **minimisation of thermal bridges**

Integrated T40 socket to guarantee **quick and convenient installation**



Rigid 0,6 kN retaining plate that ensures **stability of the entire thermal insulation system**

Pre-mounted rod and plug guarantee working **comfort and speed**

Fixing length range of **135-455 mm** enables installation in every insulation material



Expansion zone for 25 mm anchoring in type A, B, C, D substrates and 65 mm for type E substrate ensures **fast installation and unparalleled load capacity**

Compression zone for **adjustable fixing embedment** in the insulation material

8 mm diameter, being the European ETA-approved standard for all A, B, C, D and E type substrates



R-TFIX-8S UNIVERSAL FAÇADE FIXINGS

Versatile screw-in façade fixing with high performance in all base materials recommended for ETICS



FEATURES AND BENEFITS

- Quick and easy installation in all substrates (categories A,B,C,D,E)
- Unique sleeve compression zone for precision installations
- The long plastic overmoulding on the TFIX-8S screw minimises thermal bridging (value 0.002W/K), contributing to energy-saving benefits
- Plate stiffness (value 0.6 kN/mm) ensures smooth elevation surface and stable insulation system.
- Pre-assembled screw saves time and labour
- Unique design allows for high load-bearing capacities. This reduces the quantity of fixings required per square metre of insulation
- The shortest embedment depth at the maximum strength parameters

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Polyurethane (PU) boards
- Cork boards
- Light wood wool building boards

BASE MATERIALS


- Approved for use in:**
- Concrete C12/15-C50/60 (Use category A)
 - External wall panel of concrete C 16/20 – C50/60 (Use category A)
 - Solid Brick (Use category B)
 - Solid Sand-lime Brick (Use category B)
 - Vertically-perforated clay block (Use category C)
 - Reinforced components of lightweight aggregate concrete (Use category D)
 - Aerated Concrete Block (Use category E)

APPROVALS AND REPORTS

- ETA-17/0161



Installation guide movie



Rawlplug code	Fixing			Fixture Recommended thickness		Quantity		
	Diameter	Length	Plate diameter	A, B, C, D	E	Box	Outer	Pallet
	mm	mm	mm			pcs	pcs	pcs
R-TFIX-8S-115	8	115	60	80	40	200	200	8000
R-TFIX-8S-135	8	135	60	100	60	200	200	8000
R-TFIX-8S-155	8	155	60	120	80	200	200	6400
R-TFIX-8S-175	8	175	60	140	100	200	200	6400
R-TFIX-8S-195	8	195	60	160	120	200	200	6400
R-TFIX-8S-215	8	215	60	180	140	100	100	4000
R-TFIX-8S-235	8	235	60	200	160	100	100	4000
R-TFIX-8S-255	8	255	60	220	180	100	100	4000
R-TFIX-8S-275	8	275	60	240	200	100	100	4000
R-TFIX-8S-295	8	295	60	260	220	100	100	4000
R-TFIX-8S-335	8	335	60	300	260	100	100	4000
R-TFIX-8S-355	8	355	60	320	280	100	100	3200
R-TFIX-8S-375	8	375	60	340	300	100	100	3200
R-TFIX-8S-395	8	395	60	360	320	50	50	1600
R-TFIX-8S-415	8	415	60	380	340	50	50	1600
R-TFIX-8S-435	8	435	60	400	360	50	50	1600
R-TFIX-8S-455	8	455	60	420	380	50	50	1600

R-TFIX-8SX UNIVERSAL FAÇADE FIXINGS

Versatile screw-in façade fixing with high performance in all base materials recommended for ETICS



FEATURES AND BENEFITS

- Quick and easy installation in all substrates (categories A,B,C,D,E)
- Unique sleeve compression zone for precision installations
- Plate stiffness (value 0.6 kN/mm) ensures smooth elevation surface and stable insulation system
- Pre-assembled screw saves time and labour
- Unique design allows for high load-bearing capacities. This reduces the quantity of fixings required per square metre of insulation
- The shortest embedment depth at the maximum strength parameters

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Polyurethane (PU) boards
- Cork boards
- Light wood wool building boards

BASE MATERIALS

Approved for use in:


- Concrete C12/15-C50/60 (Use category A)
- External wall panel of concrete C 16/20 – C50/60 (Use category A)
- Solid Brick (Use category B)
- Solid Sand-lime Brick (Use category B)
- Vertically-perforated clay block (Use category C)
- Reinforced components of lightweight aggregate concrete (Use category D)
- Aerated Concrete Block (Use category E)

APPROVALS AND REPORTS

- ETA-17/0161



Installation guide movie

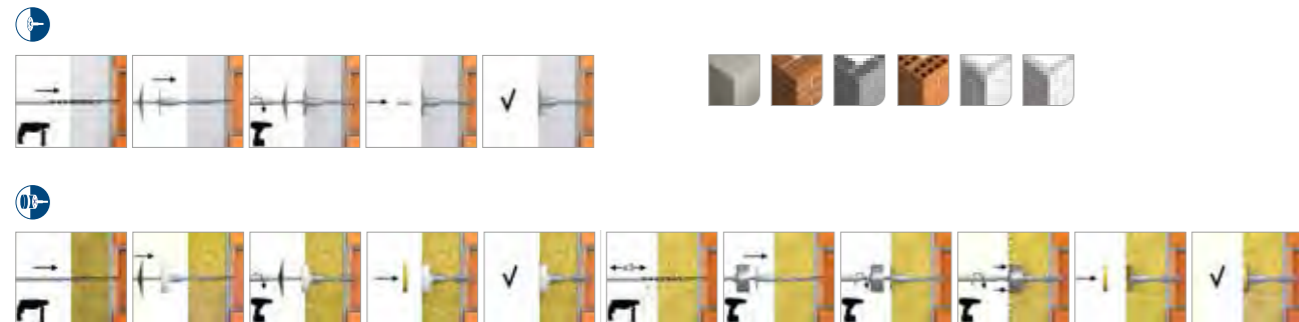

Rawplug code	Fixing			Fixture		Quantity		
	Diameter	Length	Plate diameter	Recommended thickness		Box	Outer	Pallet
	mm	mm	mm	A, B, C, D	E	pcs	pcs	pcs
R-TFIX-8SX-115	8	115	60	80	40	200	200	8000
R-TFIX-8SX-135	8	135	60	100	60	200	200	8000
R-TFIX-8SX-155	8	155	60	120	80	200	200	6400
R-TFIX-8SX-175	8	175	60	140	100	200	200	6400
R-TFIX-8SX-195	8	195	60	160	120	200	200	6400
R-TFIX-8SX-215	8	215	60	180	140	100	100	4000
R-TFIX-8SX-235	8	235	60	200	160	100	100	4000
R-TFIX-8SX-255	8	255	60	220	180	100	100	4000
R-TFIX-8SX-275	8	275	60	240	200	100	100	4000
R-TFIX-8SX-295	8	295	60	260	220	100	100	4000
R-TFIX-8SX-335	8	335	60	300	260	100	100	4000
R-TFIX-8SX-355	8	355	60	320	280	100	100	3200
R-TFIX-8SX-375	8	375	60	340	300	100	100	3200
R-TFIX-8SX-395	8	395	60	360	320	50	50	1600
R-TFIX-8SX-415	8	415	60	380	340	50	50	1600
R-TFIX-8SX-435	8	435	60	400	360	50	50	1600
R-TFIX-8SX-455	8	455	60	420	380	50	50	1600

TFIX-8ST UNIVERSAL FAÇADE FIXING

The first thermal insulation combination screw fixing that can be countersunk together with the integrated insulation cap



FEATURES AND BENEFITS

- Accurate countersunk setting automatically sets the fixing flush with the insulation layer.
- Integrated insulation cap (with unique surface reinforcement) equalizes thermal conductivity over the fixing point, whilst also leveling out drying times of render.
- Unique sleeve compression zone for precision installations.
- Simple countersunk installation in all substrates (A,B,C,D,E).
- The long plastic overmoulding on the TFIX-8ST screw minimises thermal bridging (value 0.001-0,002W/K), contributing to energy-saving benefits
- The shortest embedment depth at the maximum strength parameters.
- Unique design allows for high load-bearing capacities. This reduces the quantity of fixings required per square metre of insulation.

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool
- Polyurethane (PU) boards

BASE MATERIALS

Approved for use in:

- Concrete C12/15-C50/60 (Use category A)
- Solid Brick (Use category B)
- Solid Sand-lime Brick (Use category B)
- Hollow Brick (Use category C)
- Hollow Sand-lime Brick (Use category C)
- Vertically-perforated clay block (Use category C)
- Lightweight Concrete Block (Use category C)
- Hollow Lightweight Concrete Block (Use category C)
- Reinforced components of lightweight aggregate concrete (Use category D)
- Aerated Concrete Block (Use category E)

APPROVALS AND REPORTS

- ETA-11/0144



Installation guide movie



Rawplug code	Fixing			Fixture		Quantity		
	Diameter	Length	Plate diameter	Recommended thickness		Box	Outer	Pallet
	mm	mm	mm	A, B, C, D	E	pcs	pcs	pcs
TFIX-8ST-115	8	115	60	80	40	100	100	3200
TFIX-8ST-135	8	135	60	100	60	100	100	3200
TFIX-8ST-155	8	155	60	120	80	100	100	3200
TFIX-8ST-195	8	195	60	160	120	100	100	3200
TFIX-8ST-215	8	215	60	180	140	100	100	3200
TFIX-8ST-235	8	235	60	200	160	100	100	3200
TFIX-8ST-255	8	255	60	220	180	100	100	3200
TFIX-8ST-275	8	275	60	240	200	100	100	3200
TFIX-8ST-295	8	295	60	260	220	100	100	3200
TFIX-8ST-335	8	335	60	300	260	100	100	2400
TFIX-8ST-355	8	355	60	320	280	100	100	2400
TFIX-8ST-375	8	375	60	340	300	50	50	1600
TFIX-8ST-395	8	395	60	360	320	50	50	1600
TFIX-8ST-415	8	415	60	380	340	50	50	1600
TFIX-8ST-435	8	435	60	400	360	50	50	1600
TFIX-8ST-455	8	455	60	420	380	50	50	1600

THE MOST EFFICIENT HAMMER-IN FAÇADE FIXING




Reduced point thermal transmittance to 0,001W/K thanks to high steel pin overmould, which decreases façade heat losses

High plate rigidity (1.0 kN/mm) ensuring **stability of the façade thermal insulation system** by counteracting wind suction-induced vibrations

Easy and quick installation in substrates of all categories (ABCDE)


Compression zone for controlled fixing embedment in the insulation material

Anchoring zone of unique design for efficient transfer of high loads and reduced number of anchors per m²

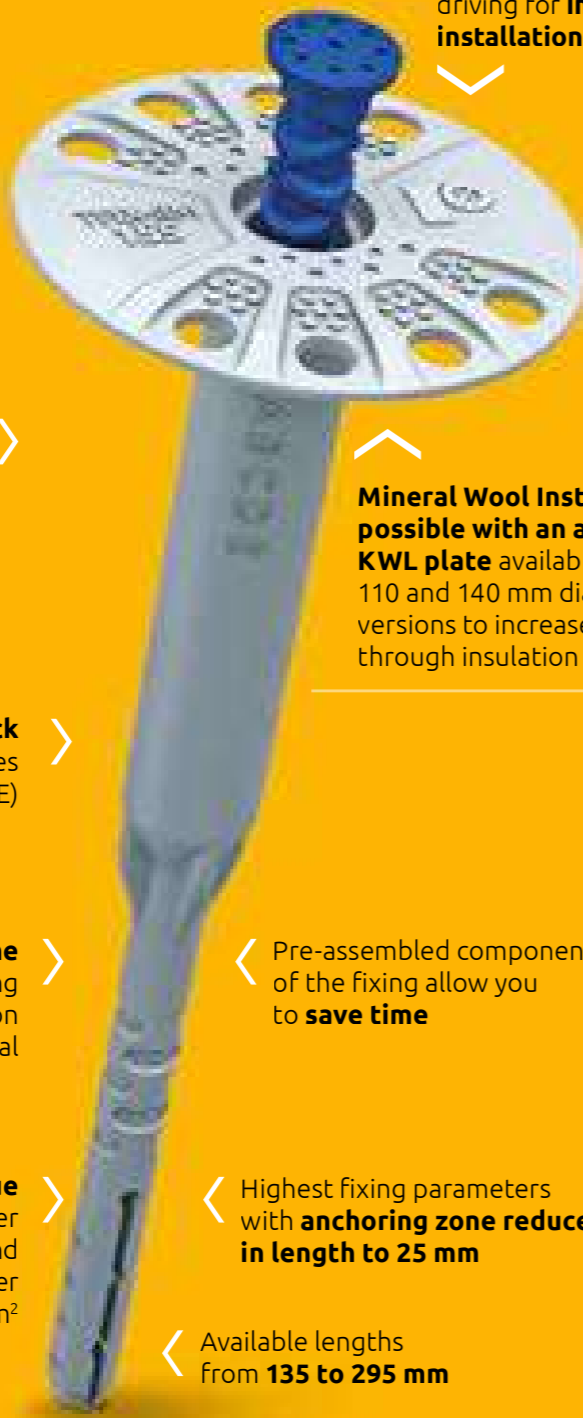

Increased head diameter enabling centric hammer driving for **improved installation comfort**

Mineral Wool Installation possible with an additional KWL plate available in 90, 110 and 140 mm diameter versions to increase pull-through insulation loads



Pre-assembled components of the fixing allow you to **save time**

Highest fixing parameters with **anchoring zone reduced in length to 25 mm**

Available lengths from **135 to 295 mm**

R-TFIX-8M HAMMER-IN FAÇADE FIXING WITH METAL NAIL

BEST EFFICIENCY! THERE'S JUST NO BETTER WAY TO DO IT. THE MOST EFFICIENT HAMMER-IN FAÇADE FIXING.

ENERGY EFFICIENCY

The product is particularly recommended for energy-efficient and green construction projects. Its new design, featuring 5 times longer thermal barrier between the steel nail and the façade surface, ensures point thermal bridges reduced by as much as 50%, i.e. to 0.001 W/K for each product length, compared to the most popular solutions available on the market. Bear in mind that low thermal permeability of the fixing is one of its main properties that eliminates the risk of discolouration spots on the façade.

BEST SOLUTION IN THE MARKET FOR ANCHORING IN CORE SLAB

The only product certified for anchoring thermal insulation boards in 40 mm thick concrete panel, where the thin substrate wall is typically a major constraint for efficient fixing.

FASTEST INSTALLATION

The hammer-in technique combined with a two-component fixing with an expansion pin is a guarantee of the fastest installation compared to other façade fixings.

UNMATCHED COMFORT OF USE

Thanks to the pin head diameter enlarged to 15 mm at the hammering point, the hammer-in fixing with a steel pin makes it easier to drive pins centrically with a hammer, improving stability of installation and consequently ensuring comfortable use of the product.

SYSTEM PROVIDERS SOLUTION OF CHOICE

It stabilises the entire façade's thermal insulation system thanks to the high rigidity plate (1.0 kN/mm) which counteracts façade vibrations under the impact of strong wind suction forces.


Flush installation



R-TFIX-8M FAÇADE FIXING WITH METAL NAIL

Versatile hammer-in façade fixing with steel nail recommended for ETICS.

NEW PRODUCT

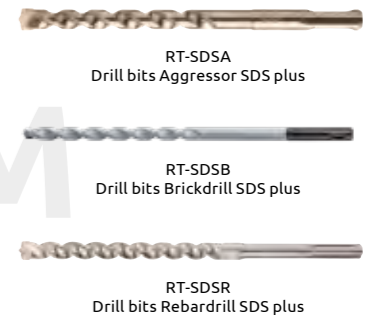

FEATURES AND BENEFITS

- Quick and easy installation in all substrates (categories A,B,C,D,E)
- Unique sleeve compression zone for precision installations
- Highest loads with anchoring zone reduced in length to 25 mm
- Reduced point thermal transmittance to 0.001W/K thanks to high steel nail overmould, which decreases façade heat losses
- Plate stiffness (value 0.7 kN/mm) ensures smooth elevation surface and stable insulation system.
- Increased head diameter enabling centric hammer driving for improved installation comfort
- Pre-assembled components of the fixing allow you to save time

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Polyurethane (PU) boards
- Cork boards
- Light wood wool building boards

BASE MATERIALS


- Approved for use in:**
- Concrete C12/15-C50/60 (Use category A)
 - Concrete C16/20 (Use category A)
 - Concrete C20/25-C50/60 (Use category A)
 - External wall panel of concrete C 16/20 – C50/60 (Use category A)
 - Solid Brick (Use category B)
 - Solid Sand-lime Brick (Use category B)
 - Hollow Sand-lime Brick (Use category C)
 - Vertically-perforated clay block (Use category C)

APPROVALS AND REPORTS

- ETA-17/0592




Installation guide movie



Rawplug code	Fixing			Fixture Recommended thickness		Quantity		
	Diameter	Length	Plate diameter	A, B, C, D	E	Box	Outer	Pallet
	mm	mm	mm			pcs	pcs	pcs
R-TFIX-8M-135	8	135	60	100	60	200	200	8000
R-TFIX-8M-155	8	155	60	120	80	200	200	6400
R-TFIX-8M-175	8	175	60	140	100	200	200	6400
R-TFIX-8M-195	8	195	60	160	120	200	200	6400
R-TFIX-8M-215	8	215	60	180	140	100	100	4000
R-TFIX-8M-235	8	235	60	200	160	100	100	4000
R-TFIX-8M-255	8	255	60	220	180	100	100	4000
R-TFIX-8M-275	8	275	60	240	200	100	100	4000
R-TFIX-8M-295	8	295	60	260	220	100	100	4000

MBA / MBA-SS METAL FAÇADE FIXING

Fire-resistant metal insulation fixing

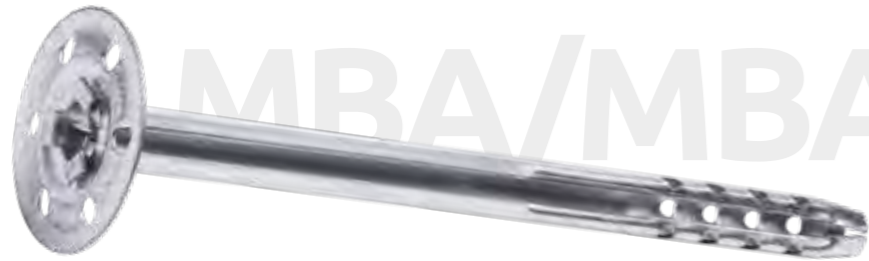

FEATURES AND BENEFITS

- Metal façade fixing, recommended for use when fire resistance (F120) is a requirement
- Stainless steel material for high corrosion resistance
- Fast and simple hammer-set installation reduces working times.
- Extensive dimensional range allows anchorage of insulation boards up to 250mm thick
- Accessory spreader plate, MKC (85mm diameter) also available for installation of soft insulation materials such as mineral wool.

APPLICATIONS

- Mineral wool
- Glass wool
- Lightweight wood wool building boards
- Lightweight recycled panels
- Polystyrene (EPS) boards
- Polyurethane (PU) boards

BASE MATERIALS

- Approved for use in:**
- Concrete C12/15-C50/60 (Use category A)
 - Solid Brick (Use category B)
 - Solid Sand-lime Brick (Use category B)
 - Aerated Concrete Block (Use category E)



APPROVALS AND REPORTS



VERSION

- MBA - Steel
- MBA-SS - Stainless steel

RELATED PRODUCT


- MKC Washers



Rawplug code	Fixing			Fixture Recommended thickness	Quantity		
	Diameter	Length	Plate diameter		Box	Outer	Pallet
	mm	mm	mm		pcs	pcs	pcs
MBA Metal façade fixing							
MBA-08090	8	90	40	40	250	250	4000
MBA-08110	8	110	40	60	250	250	4000
MBA-08140	8	140	40	90	250	250	4000
MBA-08170	8	170	40	120	250	250	4000
MBA-08200	8	200	40	150	250	250	4000
MBA-08250	8	250	40	200	125	125	4000
MBA-08300	8	300	40	250	125	125	5000
MBA-SS Stainless steel façade fixing							
MBA-SS-08090	8	90	40	40	250	250	4000
MBA-SS-08110	8	110	40	60	250	250	4000
MBA-SS-08140	8	140	40	90	250	250	4000
MBA-SS-08170	8	170	40	120	250	250	4000
MBA-SS-08200	8	200	40	150	250	250	4000
MBA-SS-08250	8	250	40	200	125	125	4000
MBA-SS-08300	8	300	40	250	125	125	4000

R-KFS-90/20 COUNTERBORE CUTTER

Cutter accessory for counterbored installation of MBA with MKC



R-KFS-90/20

FEATURES AND BENEFITS


- Precise tool construction allows to cut polystyrene, polyurethane and mineral wool boards
- Countersunk installation (with post-installed insulation cap) reduces heat transmission and results in a homogenous insulation surface
- Cost-saving solution, as countersunk installation allows selection of shorter fixings

APPLICATIONS

- External Thermal Insulation
- Mineral wool (MW) boards

BASE MATERIALS

- Approved for use in:**
- Mineral Wool Boards



Rawplug code	Fixing [mm]		Quantity [pcs]		
	Plate diameter	Length	Box	Outer	Pallet
R-KFS-90/20	90	20	1	1	-

MKC / MKC-SS WASHERS

Metal washer for use in combination with metal façade fixings from MBA range



MKC/MKC-SS

FEATURES AND BENEFITS

- Fire resistant washer
- Washer to suit all types of compressible thermal insulation materials
- Quick and easy application
- A versatile solution for many insulation scenarios.

APPLICATIONS

- Mineral wool
- Glass wool
- Lightweight wood wool building boards
- Lightweight recycled panels
- Polystyrene (EPS) boards
- Polyurethane (PU) boards

BASE MATERIALS

- Approved for use in:**
- Concrete C12/15-C50/60 (Use category A)
 - Solid Brick (Use category B)
 - Solid Sand-lime Brick (Use category B)
 - Aerated Concrete Block (Use category E)

APPROVALS AND REPORTS



VERSION


- MKC - Steel
- MKC-SS - Stainless steel



Rawplug code	Diameter	Internal diameter	Thickness	Length	Quantity		
	mm	mm	mm	mm	Box pcs	Outer pcs	Pallet pcs
MKC-85	85	14.5	0.5	2.8	250	250	12500
MKC-SS-85	85	14.5	0.5	2.8	250	250	12500

KCX TUBED INSULATION WASHER

Insulation washer with integral cap suitable for attachment of insulation layers to wooden and sheet metal substrates

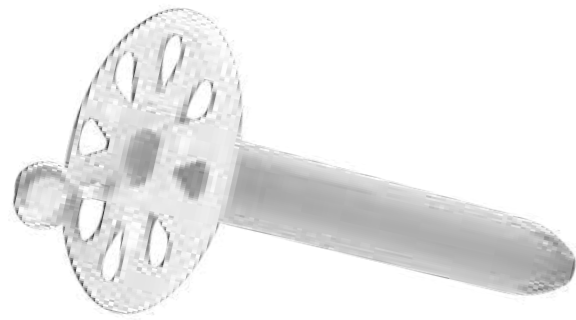

KCX

FEATURES AND BENEFITS

- Recommended for the attachment of ETICS to wooden substrates using UC screws, or to sheet metal using WB screws (allows setting without pre-drilling, thus saving a stage of installation)
- Special design of integral fastener cap allows reduction of thermal bridges to 0,001W/K
- Design with long tube allows to use short length of the screw for best cost effective solution to fix large insulation thickness.
- Consistent and reliable holding force
- Quick, simple and clean installation.
- Can be used in combination with additional KWL plate - 90, 110 or 140mm diameter

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)

BASE MATERIALS

- Approved for use in:**
- Metal Sheet & Profiles
 - Wood
 - Timber
 - Chipboard

Also suitable for use in:

- Plastic



Installation guide movie



Rawlplug code	Length mm	Quantity		
		Box pcs	Outer pcs	Pallet pcs
KCX-055	55	400	400	9600
KCX-105	105	250	250	3600
KCX-165	165	150	150	6000
KCX-CAP-105	105	250	250	70500
KCX-CAP-165	165	150	150	70500

R-KC INSULATION WASHERS

Insulation washer with integral cap suitable for attachment of insulation layers to wooden and sheet metal substrates



R-KC

R-KC INSULATION WASHERS

FEATURES AND BENEFITS


- Recommended for the attachment of ETICS to wooden substrates using UC screws, or to sheet metal using R-WB screws.
- Special design of integral fastener cap allows reduction of thermal bridges.
- Consistent and reliable holding force.
- Quick, simple and clean installation.
- Can be used in combination with additional KWL plate - 90, 110 or 140mm diameter.

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool
- Polyurethane (PU) boards

BASE MATERIALS

- Approved for use in:**
- Metal Sheet & Profiles
 - Wood



Rawlplug code	Quantity		
	Box pcs	Outer pcs	Pallet pcs
R-KC	200	200	22 400

R-DB CEILING SCREW-IN SOLUTION WITH WASHER

Screw-in system for fastening ceiling and acoustic insulation boards



R-DB

FEATURES AND BENEFITS

- Steel sheet coated with polyurethane
- Easy removable solution helps to replace the insulation board if necessary
- Screw for concrete substrates, TX25 head. Shape and type of the thread specially design to allow connecting to concrete and wood.
- Screw has special zink flake corrosion-resistant coating for anti-corrosion protection.
- The drill point is designed to provide a fast and hassle-free installation in the steel. Sharp point of the drill prevents movement of the surface of the fixture.
- Wide retaining plate improve pull-through insulation loads for the fixing point
- Flange ensures flush fit to insulation surface.

APPLICATIONS

- Thermal and acoustic insulation
- Ceiling and acoustic insulation boards
- Mineral wool (MW) boards

BASE MATERIALS

- Approved for use in:**
- Concrete C20/25-C50/60

APPROVALS AND REPORTS

- Z-21.8-2077



Rawlplug code	Fixing	Hole diameter	Thickness	Quantity [pcs]		
	Plate diameter [mm]	mm	mm	Box	Outer	Pallet
R-DB-Z	70	6.5	0.8	100	800	25600
R-DB-Z-FL	70	6.5	0.8	100	800	25600

R-DB CEILING SCREW-IN SOLUTION WITH WASHER (cont.)

Size	Rawplug code	Screw	Drill Diameter	Embedment depth	Screw drive	Quantity	
		Length				Box	Outer
		mm	mm	pcs	pcs		
Ø6.1	R-WBT-61050	50	5	30	TX25	100	1600
	R-WBT-61075	75	5	30	TX25	100	1600
	R-WBT-61090	90	5	30	TX25	100	1600
	R-WBT-61100	100	5	30	TX25	100	1600
	R-WBT-61120	120	5	30	TX25	100	1200
	R-WBT-61140	140	5	30	TX25	100	1200
	R-WBT-61160	160	5	30	TX25	100	1200
	R-WBT-61180	180	5	30	TX25	100	100
	R-WBT-61200	200	5	30	TX25	100	800
	R-WBT-61220	220	5	30	TX25	100	100
	R-WBT-61240	240	5	30	TX25	100	100
	R-WBT-61260	260	5	30	TX25	100	800
	R-WBT-61300	300	5	30	TX25	100	500

R-KWL INSULATION RETAINING PLATE



R-KWL

FEATURES AND BENEFITS

- Quick and easy application possible with all ETICS fixings
- Nylon versions ideal for enhanced plate stiffness
- Polypropylene standard versions are recommended for cost-effective applications.
- A versatile solution for many insulation scenarios.

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool
- Polyurethane (PU) boards


BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) boards
 - Mineral Wool Boards



APPROVALS AND REPORTS


- ETA-11/0144
- ETA-13/0592
- ETA-17/0161
- ETA-13/0845



Rawplug code	Diameter	Fixing		Plate diameter	Box	Quantity	
		Length	mm			Outer	Pallet
	mm	mm	mm	mm	pcs	pcs	pcs
R-KWL-090-PP	90	15	60	60	200	200	11200
R-KWL-110-PP	110	15	60	60	200	200	3200
R-KWL-140-PP	140	15	60	60	200	200	2400

R-KWX INSULATION RETAINING PLATE WITH PERFORATOR

Joining retaining plate with perforator for countersunk installation in mineral wool insulation boards

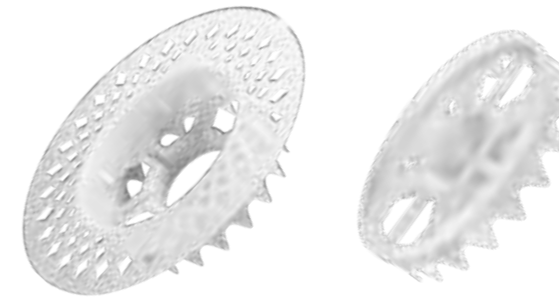

R-KWX

FEATURES AND BENEFITS

- Usage always with screw-in insulation fixing eg. R-TFIX-8SX / KCX
- Wide retaining plate improve pull-through insulation loads for the fixing point
- Allows countersunk installation into all mineral wool-insulation boards with minimal lateral tensile strength and phenolic board
- Accurate countersunk setting automatically sets the fixing flush with the insulation layer
- Permanent contact pressure
- No additional installation tool required
- Quick and easy installation
- Compatible with TFIX-8S-MW insulation cap

APPLICATIONS

- External Thermal Insulation Composite Systems (ETICS)

BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) boards
 - Mineral Wool Boards



APPROVALS AND REPORTS

- ETA 17/0161




Installation guide movie



Rawplug code	Fixing [mm]		Quantity [pcs]		
	Plate diameter	Length	Box	Outer	Pallet
R-KWX-63	63.5	16.5	100	100	5600
R-KWX-110	110	13.7	100	100	2400

R-TFIX-CAP-CUTTER MECHANICAL CUTTER FOR EPS AND MINERAL WOOL

Mechanical cutter for EPS and Mineral Wool

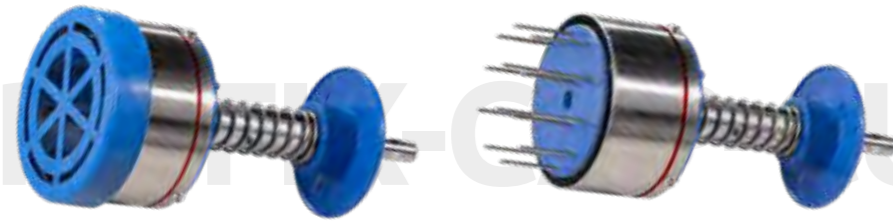

FEATURES AND BENEFITS

- User - friendly - enables fast and easy installation
- Cuts a hole without loss of cap
- Eco friendly product - less thermal insulation waste

APPLICATIONS

- External Thermal Insulation
- Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards

BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) Boards
 - Mineral Wool Boards



Rawplug code	Fixing [mm]		Quantity [pcs]		
	Plate diameter	Length	Box	Outer	Pallet
R-TFIX-CAP-CUTTER	70	30	1	16	384

R-KFS COUNTERBORE CUTTER

Cutter accessory for counterbored installation of any TFIX hammer-in façade insulation fixings



R-KFS

FEATURES AND BENEFITS

- Precise tool construction allows to cut polystyrene, polyurethane and mineral wool boards
- Countersunk installation (with post-installed insulation cap) reduces heat transmission and results in a homogenous insulation surface
- Cost-saving solution, as countersunk installation allows selection of shorter fixings

APPLICATIONS

- External Thermal Insulation
- Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Polyurethane (PU) boards
- Mineral wool (MW) boards

BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) Boards
 - Mineral Wool Boards
 - Extruded Polystyrene (XPS) Boards



Rawplug code	Fixing [mm]		Quantity [pcs]		
	Plate diameter	Length	Box	Outer	Pallet
R-KFS-63	63.0	16.5	1	16	384

R-TFIX-TOOL-CS SETTING TOOL FOR R-TFIX-SX

TX40 Setting tool for countersunk installation of screw-in fixing

NEW PRODUCT




FEATURES AND BENEFITS

- User-friendly - enables fast and easy installation
- Ideal design of TX40 bit perfect suited to the screw-in R-TFIX-8SX allows easy and stable installation
- Setting tool facilitates optimum R-TFIX-8SX countersunk installation, for the perfect flush with the surface of the insulation it is necessary to use additional insulation cap R-TFIX-CAP63
- Countersunk installation (with post-installed insulation cap) reduces heat transmission and results in a homogenous insulation surface
- TX-40 bit type

BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) Boards
 - Mineral Wool Boards

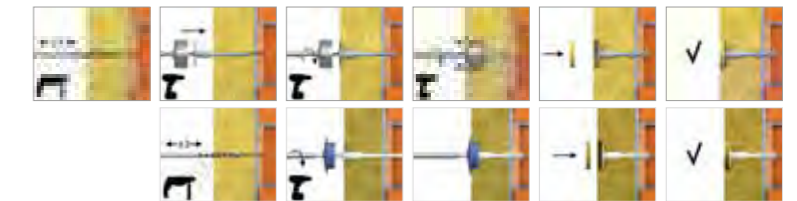

Installation guide movie

Rawplug code	Size [mm]		Quantity [pcs]	
	Diameter	Length	Box	Outer
R-TFIX-TOOL-CSM	63	38	1	12
R-TFIX-TOOL-CSM BIT	TX 40	92.5	1	1
R-TFIX-TOOL-CS	63	38	1	1

R-TFIX-TOOL-GREY SETTING TOOL FOR R-TFIX-SX

TX40 Setting tool with integrated disc for surface installation of screw-in fixing R-TFIX-8SX, setting the flange flush with the surface of the insulation



FEATURES AND BENEFITS

- Integrated disc facilitates optimum R-TFIX-8SX countersunk installation
- Ideal design of TX40 bit perfect suited to the screw-in R-TFIX-8SX allows easy installation
- User-friendly - enables fast and easy installation
- TX-40 bit type

BASE MATERIALS



Installation guide movie

Rawplug code	Size [mm]		Quantity [pcs]	
	Diameter	Embedment depth	Box	Outer
R-TFIX-TOOL-GREY	90	35	1	16

R-TFIX-TOOL-BLACK SETTING TOOL FOR R-TFIX-SX


TX40 Setting tool with integrated disc for countersunk installation of screw-in fixing R-TFIX-8SX





FEATURES AND BENEFITS

- Integrated disc facilitates optimum R-TFIX-8S-PS countersunk installation, for the perfect flush with the surface of the insulation it is necessary to use additional insulation cap R-TFIX-CAP63
- Ideal design of TX40 bit perfect suited to the screw-in R-TFIX-8S-PS allows easy and stable installation
- User-friendly - enables fast installation
- TX-40 bit type

BASE MATERIALS



Installation guide movie

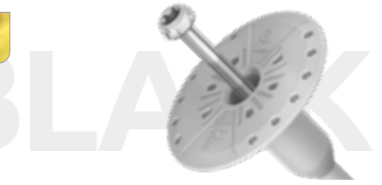

Rawplug code	Size [mm]		Quantity [pcs]	
	Diameter	Embedment depth	Box	Outer
R-TFIX-TOOL-BLACK	90	45	1	16

R-TFIX-TOOL-RED SETTING TOOL FOR R-TFIX-S


TX40 Setting tool with integrated disc for surface installation of screw-in fixing R-TFIX-8S




FEATURES AND BENEFITS

- Integrated disc facilitates optimum R-TFIX-8S surface installation, setting the flange flush with the surface of the insulation
- Ideal design of TX40 bit perfect suited to the screw-in R-TFIX-8S allows easy and stable installation
- User-friendly - enables fast and easy installation
- TX-40 bit type

BASE MATERIALS



Installation guide movie



Rawplug code	Size [mm]		Quantity [pcs]	
	Diameter	Embedment depth	Box	Outer
R-TFIX-TOOL-RED	90	8	1	16

R-TFIX-TOOL-GREEN SETTING TOOL FOR R-TFIX-S


TX40 Setting tool with integrated disc for countersunk installation of screw-in fixing R-TFIX-8S




FEATURES AND BENEFITS

- Integrated disc facilitates optimum R-TFIX-8S countersunk installation, for the perfect flush with the surface of the insulation it is necessary to use additional insulation cap R-TFIX-CAP63.
- Ideal design of TX40 bit perfect suited to the screw-in R-TFIX-8S allows easy and stable installation
- User-friendly - enables fast and easy installation
- TX-40 bit type

BASE MATERIALS



Installation guide movie



Rawplug code	Size [mm]		Quantity [pcs]	
	Diameter	Embedment depth	Box	Outer
R-TFIX-TOOL-GREEN	90	18	1	16

TFIX-8ST-TOOL SETTING TOOL


Accessory for installation of screw fixing TFIX-8ST




FEATURES AND BENEFITS

- Integrated disc facilitates optimum TFIX-8S installation, setting the flange flush with the surface of the insulation
- User-friendly - enables fast and easy installation
- TX-40 bit type

BASE MATERIALS



Installation guide movie




Rawplug code	Size [mm]		Quantity [pcs]	
	Diameter	Length	Box	Outer
TFIX-8ST-TOOL	80	15	1	16

R-TFIX-CAP INSULATION CAPS

Post-installed EPS polystyrene cap reduces heat transmission and results in a homogenous insulation surface



White Polystyrene



Grey Polystyrene



Mineral Wool


FEATURES AND BENEFITS

- Post-installed cap reduces heat transmission at fixing points
- Results in homogeneous and smooth insulation surface
- Cost-saving solution, as countersunk installation allows selection of shorter fixings
- Quick and easy application

APPLICATIONS

- Façade construction (ETICS)
- Polystyrene boards
- Polyurethane boards
- Mineral wool

BASE MATERIALS



APPROVALS AND REPORTS

- ETA-17/0161



Rawplug code	Material	Size [mm]		Quantity [pcs]	
		Diameter	Embedment depth	Box	Outer
R-TFIX-CAP63-EPS-G	polystyrene (grey)	63	10	100	100
R-TFIX-CAP63-EPS-W	polystyrene (white)	63	10	100	100
R-TFIX-CAP63-MW	mineral wool	63	10	100	100
R-TFIX-CAP90-MW	mineral wool	90	20	500	500

R-TFIX-CAP15 INSULATION CAPS

Post-installed EPS polystyrene cap reduces heat transmission



FEATURES AND BENEFITS


- Post-installed cap reduces heat transmission at fixing points



APPLICATIONS

- Façade construction (ETICS)
- Polystyrene boards
- Mineral wool (MW) boards
- Polyurethane boards

BASE MATERIALS



APPROVALS AND REPORTS


- ETA-17/0161



Rawlplug code	Material	Size [mm]		Quantity [pcs]	
		Diameter	Embedment depth	Box	Outer
R-TFIX-CAP15-EPS-G	polystyrene (grey)	15	10	100	100
R-TFIX-CAP15-EPS-W	polystyrene (white)	15	10	100	100

R-ISO-PLUG INSULATION FIXINGS

For fastening lightweight fixtures on insulated façades

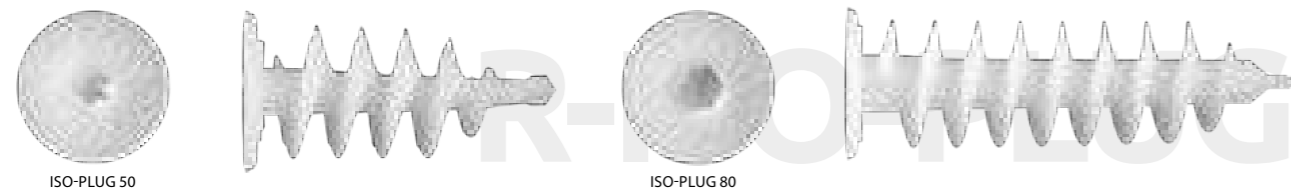

FEATURES AND BENEFITS


- No thermal bridging.
- Can be installed with commercial drill/drive tool.
- The geometry of the R-ISO-PLUG allows for a simple installation in thin layers of plaster, without the need for pre-drilling, thus saving a stage of installation
- Fixtures are fixed with a 4 - 4.5mm screw

APPLICATIONS

- Façade construction (ETICS)
- Attachments to insulation
- Lightweight recycled panels
- Electrical fittings
- Refrigeration and climate control

BASE MATERIALS

- Approved for use in:**
- Polystyrene (EPS) boards
 - Mineral Wool Boards




Installation guide movie



Rawlplug code	Fixing Length [mm]	Recommended screw diameter	Quantity [pcs]	
			Box	Outer
R-ISO-PLUG-50	55	4.0 - 5.0	50	600
R-ISO-PLUG-80	85	6.0 - 7.0	40	300

FTF FIR TREE FIXING

Firtree Fixings securely hold back surface mounted beads through the reinforcement coat and into the insulation

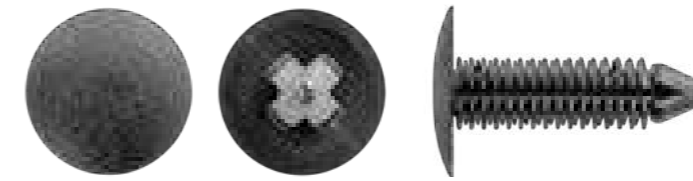

FTF

FEATURES AND BENEFITS


- The button contracts on entry and then relaxes to secure the two panels.
- Simple and quick to install.
- Plastic ribs on the fir tree fastener flex inwards as the item is pushed into place and then relax to grip the sides of the hole into which it has been inserted. This forms a secure fastening in the panel or sheet.

APPLICATIONS

Approved for use in:

- Polystyrene (EPS) Boards
- Mineral Wool Boards

BASE MATERIALS



Rawlplug code	Plug	Length	Diameter	Quantity	
	Diameter			Box	Outer
	mm	mm	pcs	pcs	
FTF-PA	18	29	7.5	1000	1000

R-HR SCAFFOLDING EYEBOLT

The ideal interaction of the scaffold eyebolt and R-HRK plug allows for a high load-bearing capacity, thus providing increased safety



R-HR

FEATURES AND BENEFITS

- The high-quality weld stops the eye from opening.
- In order to achieve the maximum load-bearing capacity, nylon plugs should only be used once

APPLICATIONS

- Scaffolding

BASE MATERIALS

Suitable for use in:

- Concrete
- Solid Brick
- Natural Stone (after site testing)
- Solid Sand-lime Brick
- Vertically-perforated Clay Block



Rawlplug code	Diameter	Length	Quantity	
			Box	Outer
	mm	mm	pcs	pcs
R-HR-12120	12	120	25	25
R-HR-12160	12	160	25	25
R-HR-12190	12	190	25	25
R-HR-12230	12	230	25	25
R-HR-12300	12	300	25	25
R-HR-12350	12	350	25	25



” Roofing insulation fixings

Overview of roofing insulation fixings	286
Telescopic sleeves	287
Roofing screws	288
Roofing washers	291
Roofing selector	293




ETA APPROVED




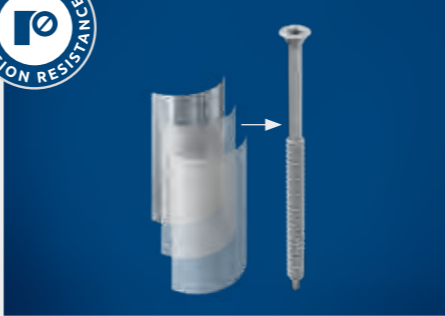

**BEST PERFORMANCE
CONFIRMED IN WIND-LOAD TESTS**




HIGH IMPACT RESISTANCE



USER FRIENDLY INSTALLATION

**HIGH CORROSION RESISTANCE-15
KESTERNICH CYCLES**




LONG-TERM USE GUARANTEE




FOR ALL SUBSTRATES



**WIDE RANGE OF SIZE
COMBINATIONS & ACCESSORIES**




**ROOFIX CALCULATION
SOFTWARE**






**SYSTEM APPROVED AND RECOM-
MENDED BY TOP CLASS ROOFING
SYSTEMS**


EXCELLENT
RESISTANCE
FOR HIGH
LOADS

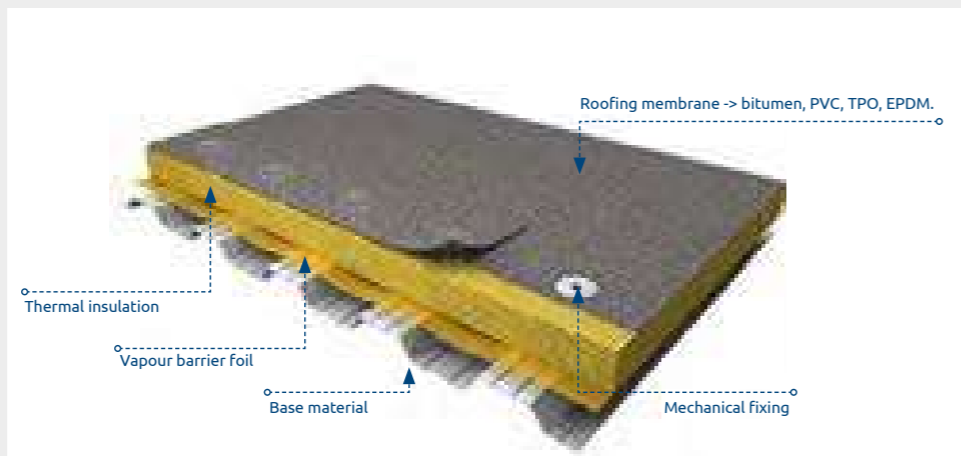10 BENEFITS
OF THE RAWLPLUG
ROOFING SYSTEM




**LAYERS OF A TYPICAL
ROOFING INSULATION SYSTEM**


TELESCOPIC SLEEVES & WASHERS	TELESCOPIC SLEEVES GOK / GOK-PLUS/ GOK75	
	WASHERS - FLAT VERSION R-POK-040-ALZN / R-POK-041-ALZN /R-POK-06 / R-POW-07-ALZN	
	WASHERS - DEEP VERSION R-POW-05-ALZN	
SIZE	SCREW LENGTH [MM]	
	SCREW THREAD DIAMETER [MM]	
	TELESCOPIC RANGE [MM]	

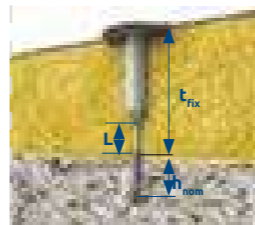



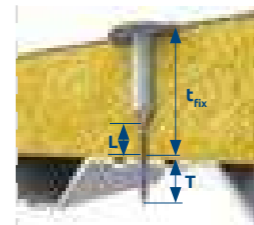






**Recommendation for the selection
of roofing fixings in concrete:**
Total length (assembled sleeve + screw) = min. $t_{fix} + 35-45$ mm
 $L = 10\%$ insulation thickness but not less than 15 mm
 $h_{nom} = \text{min. } 20/30$ mm (see data tables)

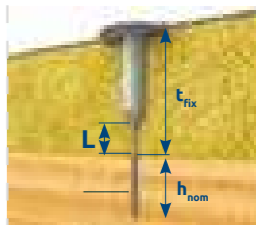

**Recommendation for the selection
of roofing fixings in steel sheet:**
Total length (assembled sleeve + screw) = min. $t_{fix} + 30-35$ mm
 $L = 10\%$ insulation thickness but not less than 15 mm
 $T = \text{min. } 15-20$ mm



**Recommendation for the selection
of roofing fixings in timber:**
Total length (assembled sleeve + screw) = min. $t_{fix} + 40$ mm
 $L = 10\%$ insulation thickness but not less than 15 mm
 $h_{nom} = \text{min. } 24$ mm (OSB & Plywood differ)


R-WBT	R-WCS	R-WB	R-WX	R-WO	R-WW
					
					
✓	-	-	✓	✓	✓
✓	✓	-	✓	✓	✓
✓	-	✓	✓	✓	✓
50-300	28-230	80-220	50-300	60-300	35-120
6.1	6.3	4.8	4.8	4.8	5.0
15-725	-	-	15-725	15-725	15-725



RAWLPLUG®
Academy

Use the e-learning
training or sign up
for our hands
-on training.

Fixing Range

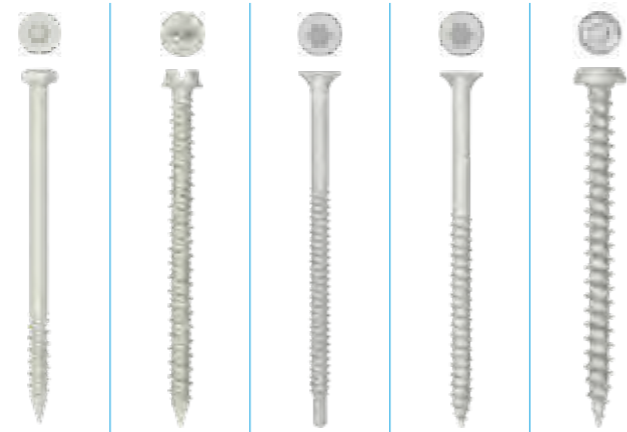

ROOFING SCREWS		R-WBT	R-WCS	R-WX	R-WO	R-WW
TELESCOPIC TUBES & WASHERS	R-GOK-N, R-GOK	✓	-	✓	✓	✓
	R-POK-040-ALZN R-POK-041-ALZN R-POK-06-ALZN	✓	✓	✓	✓	✓
	R-POW-05-ALZN	✓	-	✓	✓	✓
	R-POW-07-ALZN	✓	✓	✓	✓	✓
SIZE	SCREW LENGTH [mm]	50-300	28-350	50-300	60-300	20-120
	SCREW THREAD DIAMETER [mm]	6.1	6.3	4.8	4.8	5.0
	TELESCOPIC RANGE [mm]	15-725	-	15-725	15-725	25-725
BASE MATERIALS	CONCRETE	✓	✓	-	WO +K08L	-
	THIN-WALLED CONCRETE SLABS	✓	✓	-	-	-
	STEEL	-	-	✓	✓	-
	TIMBER	✓	-	-	✓	✓
	ORIENTED STRAND BOARD	✓	-	-	✓	✓
	PLYWOOD	✓	-	-	✓	✓
APPROVALS	ETA CE	✓	✓	✓	✓	✓
	UB	✓	✓	✓	✓	-

R-GOK TELESCOPIC SLEEVE WITH ROUND PLATE

NEW

Telescopic sleeve for flat roof insulation fixings. Combined together with the corresponding screw allows application in all types of substrates.



R-GOK

FEATURES AND BENEFITS

- Impact-resistant material used ensures constant mechanical properties over the lifetime of a roof. Also, retains its properties over a wide temperature range
- Round plate eliminates the need of positioning the fixing during the installation, the bottom part of the connection sleeve is designed to carry very heavy loads during operation of the roof
- Internal sleeve design allows pre-assembly with any Rawplug roofing screw, shortening installation
- The lower part of the connector telescope has been designed in the shape of a cone with an optimum angle of inclination which significantly affects the speed of its installation
- Guarantees the highest load capacity of the roof construction for both static and dynamic loads in accordance with ETAG006




APPLICATIONS

- Mechanically fastened flexible roof waterproofing membrane

BASE MATERIALS

Approved for use in:

- Concrete
- Concrete Slab
- Metal Sheet & Profiles
- Timber
- Plywood
- Chipboard



APPROVALS AND REPORTS

- ETA-09/0346



VERSION

- GOK - Polypropylene
- GOK-N - Nylon




Installation guide movie

Rawplug code	Plastic sleeve		Quantity	
	Diameter mm	Length mm	Box pcs	Outer pcs
R-GOK-015	15,5	15	1100	1100
R-GOK-035	15,5	35	600	600
R-GOK-065	15,5	65	400	400
R-GOK-075	15,5	75	300	300
R-GOK-085	15,5	85	300	300
R-GOK-095	15,5	95	250	250
R-GOK-105	15,5	105	250	250
R-GOK-125	15,5	125	200	200
R-GOK-135	15,5	135	200	200
R-GOK-165	15,5	165	150	150
R-GOK-185	15,5	185	100	100
R-GOK-225	15,5	225	100	100
R-GOK-255	15,5	255	75	75
R-GOK-285	15,5	285	75	75
R-GOK-325	15,5	325	50	50
R-GOK-385	15,5	385	50	50
R-GOK-425	15,5	425	50	50
R-GOK-525-N	15,5	525	50	50
R-GOK-625-N	15,5	625	50	50
R-GOK-725-N	15,5	725	50	50

R-WBT SCREW FOR CONCRETE


Screw for concrete substrates, TX25 head.
Shape and type of the thread specially design to allow connecting to concrete and wood.



R-WBT

FEATURES AND BENEFITS

- Hardened thread surface
- High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- Shape and type of the thread specially design to allow connecting to concrete and wood
- The drill point is designed to provide a fast and hassle-free installation. Sharp point of the drill prevents movement of the surface of the fixture
- Pre-assembly with other component is possible before installation




APPLICATIONS

- Insulation materials in flat roof applications in conjunction with telescopic connector and steel washer

BASE MATERIALS

Approved for use in:

- Concrete
- Concrete Slab
- Timber



APPROVALS AND REPORTS

- ETA-09/0346



Installation guide movie

Rawplug code	Fixing		TX	Quantity	
	Diameter	Length		Box	Outer
	mm	mm		pcs	pcs
R-WBT-61050	50	6,1	TX25	100	1600
R-WBT-61075	75	6,1	TX25	100	1600
R-WBT-61090	90	6,1	TX25	100	1600
R-WBT-61100	100	6,1	TX25	100	1200
R-WBT-61120	120	6,1	TX25	100	1200
R-WBT-61140	140	6,1	TX25	100	1200
R-WBT-61160	160	6,1	TX25	100	100
R-WBT-61180	180	6,1	TX25	100	800
R-WBT-61200	200	6,1	TX25	100	100
R-WBT-61220	220	6,1	TX25	100	100
R-WBT-61240	240	6,1	TX25	100	800
R-WBT-61260	260	6,1	TX25	100	500
R-WBT-61300	300	6,1	TX25	100	500

R-WCS SCREW FOR CONCRETE

Screw for concrete substrates, HEX head. Specially designed thread for fastening to concrete.



R-WCS

FEATURES AND BENEFITS

- Hardened thread surface
- High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- Shape and type of the thread specially design to allow connecting to concrete
- Sharp point of the drill prevents movement of the surface of the fixture



APPLICATIONS

- Speedy anchoring of different kind of material in concrete on roofs and façades

BASE MATERIALS

Approved for use in:

- Concrete
- Concrete Slab



APPROVALS AND REPORTS

- ETA-09/0346



Installation guide movie

R-WCS SCREW FOR CONCRETE (cont.)

Rawplug code	Fixing		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-WCS-63028*	6,3	28	250	4000
R-WCS-63035*	6,3	35	250	4000
R-WCS-63045*	6,3	45	200	3200
R-WCS-63080*	6,3	80	100	1600
R-WCS-63100*	6,3	100	100	1600
R-WCS-63130*	6,3	130	100	1200
R-WCS-63230*	6,3	230	100	100

* The product is available while stocks last

R-WX-T SELF-DRILLING SCREWS FOR STEEL

Screw for trapezoidal steel sheet



R-WX-T

FEATURES AND BENEFITS

- Hardened thread surface
- High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- Shape and type of the thread specially design to allow connecting to metal sheets
- The drill point is designed to provide a fast and hassle-free installation. Sharp point of the drill prevents movement of the surface of the fixture
- Reduced drilling point ensures optimal tightness and correct hole diameter in thin metal sheets.
- Pre-assembly with other components is possible before installation

APPLICATIONS

- Insulation layers on flat roofs together with a appropriate telescopic or steel washer

BASE MATERIALS

Approved for use in:

- Metal Sheet & Profiles



APPROVALS AND REPORTS

- ETA-09/0346



Installation guide movie

Rawplug code	Fixing		Quantity	
	Diameter	Length	Box	Outer
	mm	mm	pcs	pcs
R-WX-48T050	4.8	50	250	3000
R-WX-48T060	4.8	60	250	3000
R-WX-48T070	4.8	70	250	3000
R-WX-48T080	4.8	80	250	3000
R-WX-48T100	4.8	100	200	2400
R-WX-48T120	4.8	120	200	2400
R-WX-48T140	4.8	140	200	2400
R-WX-48T160	4.8	160	100	1200
R-WX-48T180	4.8	180	100	800
R-WX-48T200	4.8	200	100	800
R-WX-48T240	4.8	240	100	800
R-WX-48T300	4.8	300	100	500

R-WO-T SCREWS FOR STEEL

Screw for trapezoidal steel sheet substrate; max thickness of 0.9mm, TX25 drive



R-WO-T

FEATURES AND BENEFITS

- Hardened thread surface
- High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- Shape and type of the thread specially design to allow connecting to metal sheets and wood
- The drill point is designed to provide a fast and hassle-free installation. Sharp point of the drill prevents movement of the surface of the fixture
- Pre-assembly with other components is possible before installation

APPLICATIONS

- Insulation layers on flat roofs together with a appropriate telescopic or steel washer

BASE MATERIALS

- Approved for use in:**
- Metal Sheet & Profiles
 - Timber
 - Chipboard
 - Oriented Strand Board



APPROVALS AND REPORTS

- ETA-09/0346



Installation guide movie



Rawplug code	Fixing		Quantity	
	Diameter mm	Length mm	Box pcs	Outer pcs
R-WO-48T060	4,8	60	250	4000
R-WO-48T080	4,8	80	250	3000
R-WO-48T100	4,8	100	200	2400
R-WO-48T120	4,8	120	200	3200
R-WO-48T140	4,8	140	200	2400
R-WO-48T160	4,8	160	100	1200
R-WO-48T180	4,8	180	100	100
R-WO-48T200	4,8	200	100	100
R-WO-48T240	4,8	240	100	500
R-WO-48T300	4,8	300	100	500

R-WW-T SCREWS FOR TIMBER

Shape and type of the thread specially designed for fixing to wood, TX25 drive



R-WW-T

FEATURES AND BENEFITS

- Hardened thread surface
- High quality anti-corrosion coating guarantees resistance of 15 Kesternich cycles
- The shape and type of screw's thread is designed specifically for connecting to wood.
- The drill point is designed to provide a fast and hassle-free installation. Sharp point of the drill prevents movement of the surface of the fixture
- Pre-assembly with other components is possible before installation

APPLICATIONS

- Insulation materials in flat roof applications in conjunction with telescopic connector and steel washer

BASE MATERIALS

- Approved for use in:**
- Timber
 - Plywood
 - Chipboard
 - Oriented Strand Board



APPROVALS AND REPORTS

- ETA-09/0346



Installation guide movie




R-WW-T SCREWS FOR TIMBER (cont.)

Rawplug code	Fixing		Quantity	
	Diameter mm	Length mm	Box pcs	Outer pcs
R-WW-50T35	5.0	35	500	8000
R-WW-50T45	5.0	45	250	4000
R-WW-50T55	5.0	55	200	3200
R-WW-50T75	5.0	75	100	1600
R-WW-50T90	5.0	90	100	1600
R-WW-5T120	5.0	120	100	1600

R-POK STEEL WASHERS

Steel washer with special form for roofing applications, for use with all types of roofing screws

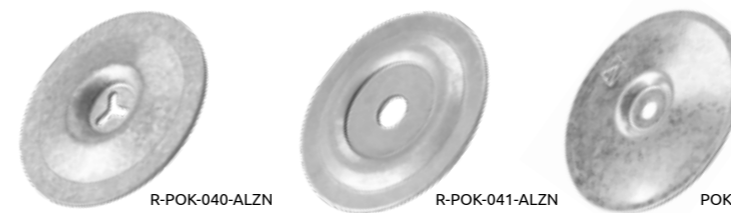

R-POK-040-ALZN

R-POK-041-ALZN

POK-06-ALZN

R-POK

FEATURES AND BENEFITS

- Aluzinc coating for corrosion resistance
- Formed profile for added stiffness
- Ideal for rigid insulation

APPLICATIONS


- Mechanically fastened flexible roof waterproofing membrane

BASE MATERIALS

- Approved for use in:**
- Metal Sheet & Profiles
 - Timber
 - Chipboard
 - Plywood
 - Concrete
 - Concrete Slab

APPROVALS AND REPORTS

- ETA-09/0346



Rawplug code TX25	Corrosion Category	Aluminum washer	Quantity		
		Hole diameter mm	Box pcs	Outer pcs	Pallet pcs
R-POK-040-ALZN	C4	2,5	1000	1000	54000
R-POK-041-ALZN	C4	7	1300	1300	18000
R-POK-06-ALZN	C2	7	100	100	18000

R-POW-05, R-POW-07 OVAL STEEL WASHERS

Steel washer with special form for roofing applications, for use with all types of roofing screws



R-POW-05-ALZN

R-POW-07-ALZN



” Foams and Sealants

Overview of foams	296
Foams	298
Handheld foams	299
Gun foams	300
Fire resistant foams	302
Mortars and adhesives	303
Foams accessories	304
Overview of sealants	309
Sealants	308
Silicones	310
Roof rubber sealants	313
Acrylics	314
Sealants and adhesives	316

UNIVERSAL

UNIVERSAL FOAM


R-RPS / R-RPP-45



Self-expanding, single component polyurethane foam adhering to all common building materials.



30 L / 45 L



18 - Handheld/15 - Gun

FILLING GAPS AND CAVITIES IN MOST BUILDING MATERIALS



FILLING, SEALING & SOUND PROOFING



INSTALLATION OF DOORS AND WINDOWS



HIGH EFFICIENT FOAM

R-RPP-65-W



High Yield Gun PU foam for use in all building materials.



65 L



18

INSTALLATION OF A LARGE NUMBER OF DOORS AND WINDOWS



INSTALLATION OF DOORS



INSTALLATION OF WINDOWS



FOAM FOR PVC




R-RPS-PVC / R-RPP-PVC



Low expansion formula, single component polyurethane foam with controlled expansion rate.



45 L



18 - Handheld/15 - Gun

INSULATION OF UPVC FRAMES AND PVC ELEMENTS



INSTALLATION AND SEALING OF SILLS AND THRESHOLDS



INSTALLATION OF DOORS AND WINDOWS




FIRE RATED FOAM

R-RPP-B1



Single component polyurethane fire-resistant foam with EI 240 classification.



45 L




15

BONDING INSULATION BOARDS ON FAÇADES AND FOUNDATIONS



ALL APPLICATIONS WHERE FIRE RETARDANT CHARACTERISTICS ARE REQUIRED



FIRE RETARDANT INSTALLATION OF WINDOW AND DOORFRAMES




ADHESIVE FOR THERMAL INSULATION BOARDS

R-RPP-FIX



Polyurethane adhesive with applicator gun, designed for bonding boards.



8-12m2



12

BONDING INSULATION BOARDS ON FAÇADES AND FOUNDATIONS



BONDING AND INSULATION OF WALL PANELS, ROOFING SHEETS AND TILES



FILLING GAPS BETWEEN INSULATION BOARDS




MORTAR


R-RPP-MORTAR



Thin Bed PU mortar for thin joints designed for bricklaying internal and external walls.



12m2



12

RAISING WALLS WITH THIN JOINTS, MADE OF HIGH-ACCURACY MATERIALS



RAISING LOAD-BEARING WALLS



RAISING PARTITION WALLS




ROOFING ADHESIVE


R-RPP-ROOF



Polyurethane adhesive with applicator gun, designed for bonding XPS and EPS boards for the flat roofs.



12m2



12


BONDING EXTRUDED POLYSTYRENE PANELS TO OSB BOARDS



BONDING EXTRUDED POLYSTYRENE PANELS TO GALVANIZED STEEL SHEET



BONDING EXTRUDED POLYSTYRENE PANELS TO GALVANIZED STEEL SHEET



FOAMS SEALANTS AND ADHESIVES

CONSTANT QUALITY AND HIGH EFFICIENCY






RAWPLUG Academy

Use the e-learning training or sign up for our hands-on training.

- Foams - general characteristics
- Foams - advanced characteristics
- Foams - advanced characteristics RPP i RPS
- Foams - characteristic of product - B1
- Foams - characteristic of product - Mortar
- Foams - characteristic of product - RPP-FIX

Overview of our range ✓

										
TYPE OF PRODUCT		R-RPS	R-RPS-PVC	R-RPP-45	R-RPP-65	R-RPP-PVC	R-RPP-FIX	R-RPP-B1	RPP-FIX-60S	R-RPP MORTAR
PRODUCT		HAND HELD EXPANDING UNIVERSAL	HAND HELD EXPANDING LOW EXPANSION	GUN FOAM UNIVERSAL	GUN FOAM SUPER EFFICIENT	GUN FOAM LOW EXPANSION	ADHESIVE FOR POLYSTYRENE STYROFIX	GUN FOAM FIRE RESISTANT	EXPRESS POLY-URETHANE ADHESIVE	POLYURETHANE MORTAR GUN VERSION
APPLICATIONS	 Installation & sealing of windows & doors	✓	✓	✓	✓	✓	-	✓	-	-
	 Installation and sealing of sills and thresholds	✓	✓	✓	✓	✓	-	✓	✓	-
	 Insulation of roofs and flat roofs	✓	✓	✓	✓	✓	✓	✓	-	-
	 Filling gaps and cavities in most building materials	✓	✓	✓	✓	✓	✓	✓	✓	-
	 Sealing around garage doors & shutters	✓	✓	✓	✓	✓	-	✓	✓	-
	 Filling around pipework and ducting	✓	✓	✓	✓	✓	✓	✓	✓	-
	 Thermal insulation and soundproofing	✓	✓	✓	✓	✓	✓	✓	✓	-
	 Bonding of insulation for façades and foundations	-	-	-	-	-	✓	-	-	-
	 To meet fire regulations class B1 according to DIN 4102	-	-	-	-	-	-	✓	-	-
	 Bricklaying load-bearing & partition walls	-	-	-	-	-	-	-	-	✓

R-RPS HAND HELD EXPANDING FOAM

Self-expanding, single component polyurethane foam adhering to all common building materials



R-RPS

FEATURES AND BENEFITS ✓

- High thermal and acoustic insulation
- Internal and external use
- Fast curing, workable in 40 minutes
- Resistant to mould and fungi
- Excellent adhesion to most construction materials
- Low temperature version "W" works at -15°C

APPLICATIONS ✓

- Ideal for filling, sealing & sound proofing
- Thermal insulation in roof cavities
- Gap filling around plumbing & heating pipework
- Filling any awkward gap or cavity
- Installation of doors & windows

APPROVALS AND REPORTS ✓

- AT-15-9800/2016



BASE MATERIALS ✓

- Chipboard
- Concrete
- Concrete Slab
- Cracked Concrete
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab



Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPS	Multi-season version	750ml	12	12	672
R-RPS-W	Winter version	750ml	12	12	672



R-RPS-PVC HAND HELD FOAM - LOW EXPANSION

Low expansion formula single component polyurethane foam with controlled expansion rate



R-RPS

FEATURES AND BENEFITS ✓

- Low expansion forces will not distort frames or profiles
- The low expansion rate means that the yield is given out in more linear metres than a standard PU foam, so the best solution for narrow joints around windows and doors.
- Excellent thermal and acoustic insulation properties
- Rapid curing, workable in 40 minutes
- Excellent adhesion to most construction materials
- High yield - up to 45 litres from 750ml can
- Low temperature version „W“ works at -10°C
- Resistant to mould and fungi

APPLICATIONS ✓

- Particularly suitable for installation of UPVC frames and PVC elements
- Ideal for mounting sealing and soundproofing
- Installation of doors and windows
- Sealing window sills
- Filling around plumbing & heating pipework
- Filling any awkward gap or cavity

APPROVALS AND REPORTS ✓

- AT-15-9800/2016



BASE MATERIALS ✓

- Chipboard
- Concrete
- Concrete Slab
- Cracked Concrete
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab



Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPS-PVC	Multi-season version	750ml	12	12	672
R-RPS-PVC-W	Winter version	750ml	12	12	672



R-RPS-500 HAND HELD POLYURETHANE FOAM

Universal, one-component polyurethane foam with delivery tube



R-RPS

FEATURES AND BENEFITS

- Ideal for mounting, sealing and soundproofing.
- Suitable for use indoors and outdoors.
- Excellent sound and thermal insulation properties.
- Excellent adhesion to most materials and substrates used in construction.
- Recommended for filling empty spaces and wide gaps
- Resistant to mould and fungi.

APPLICATIONS

- Fixing pipes and cables in HVAC systems
- The application of PU foam: installation of windows and doors, filling, sealing, insulation in the construction industry
- Installation of windows and door
- Easy fixing of door and window frames - timber, metal or PVC
- Filling empty spaces, cracks, pipe passages
- Filling gaps in the thermal insulation of buildings
- Thermal insulation of roofs and ceilings
- Thermal insulation of plumbing and central heating

BASE MATERIALS

- Chipboard
- Concrete
- Concrete Slab
- Cracked Concrete
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab
- Lightweight Concrete Block
- Non-cracked Concrete
- Oriented Strand Board
- Plasterboard
- Plastic
- Plywood

APPROVALS AND REPORTS

- AT-15-9800/2016



Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPS-500	Multi-season version	500ml	12	12	672
R-RPS-500-W	Winter version	500ml	12	12	672



R-RPP-45 GUN PU FOAM

Self-expanding, single component polyurethane foam adhering to all common building materials



R-RPP

FEATURES AND BENEFITS

- High thermal and acoustic insulation
- Internal and external use
- Fast curing, workable in 40 minutes
- Excellent adhesion to most construction materials
- High yield - up to 45 litres from 750ml can
- Low temperature version "W" works at -10°C
- Resistant to mould and fungi

APPLICATIONS

- Ideal for mounting, sealing & sound proofing
- Installation of doors & windows
- Thermal insulation in roof cavities
- Gap filling around plumbing & heating pipework
- Filling any awkward gap or cavity


APPROVALS AND REPORTS

- AT-15-9800/2016




BASE MATERIALS

- Plastic
- Aerated Concrete Block
- Concrete, Concrete Slab
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab
- Chipboard

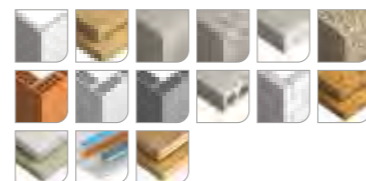

Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPP-45	Multi-season version	750ml	12	12	672
R-RPP-45-WET	Tropical version	750ml	12	12	672

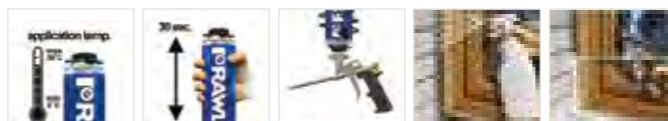

R-RPP-65 SUPER EFFICIENT GUN PU FOAM

High Yield Gun PU foam for use in all building materials



R-RPP

FEATURES AND BENEFITS

- High yield – up to 65 litres from one can
- Much lower cost per 1 litre of cured foam
- Fast curing, workable in 40 minutes
- Ideal solution for installation of multiple windows
- Excellent adhesion to most construction materials
- Winter version works in winter conditions as low as -10°C
- No need for frequent change of cans, thus saving time

APPLICATIONS

- Ideal for mounting, sealing and soundproofing
- Installation of a large number of doors and windows
- Thermal insulation in roof cavities
- Gap filling around plumbing and heating pipework
- Filling any awkward gap or cavity


APPROVALS AND REPORTS

- AT-15-9800/2016



BASE MATERIALS

- Plastic
- Aerated Concrete Block
- Concrete, Concrete Slab
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab
- Chipboard

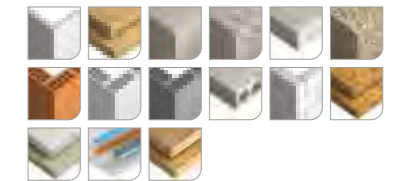


Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPP-65	Multi-season version	750ml	12	12	672
R-RPP-65-W	Winter version	750ml	12	12	672



R-RPP-PVC LOW EXPANSION GUN PU FOAM

Low expansion formula, single component polyurethane foam with controlled expansion rate



R-RPP

FEATURES AND BENEFITS

- Low-pressure formula eliminates risk of deformation frames or profiles and ensures proper gaps filling
- Excellent thermal and acoustic insulation properties
- Good adhesion to most construction materials
- Winter version works in winter conditions (at -10°C)
- Fast curing, workable in 40 minutes
- Internal and external use

APPLICATIONS

- Ideal for mounting, sealing & sound proofing
- Installation of a large amount doors & windows
- Thermal insulation in roof cavities
- Gap filling around plumbing & heating pipework
- Filling any awkward gap or cavity


APPROVALS AND REPORTS

- AT-15-9800/2016




BASE MATERIALS

- Plastic
- Aerated Concrete Block
- Concrete, Concrete Slab
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab
- Chipboard

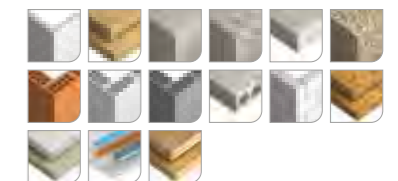

Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPP-PVC	Multi-season version	750ml	12	12	672

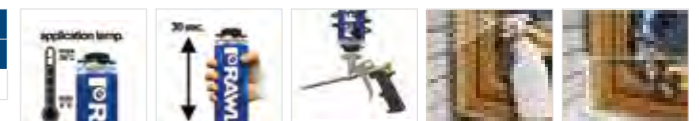

R-RPP-B1 FIRE RESISTANT GUN PU FOAM

Fire Resistant Gun PU foam with EI 240 classification




FEATURES AND BENEFITS

- Fire resistance up to 240 min (EI 240)
- Efficient seal against smoke and gas
- Self-extinguishing
- Excellent thermal and acoustical insulation properties
- Fast curing, workable in 40 minutes
- Can be painted or plastered when cured
- Excellent adhesion to most construction materials
- Foam colour: Pink

BASE MATERIALS

- Aerated Concrete Block
- Concrete, Concrete Slab
- High-Density Natural Stone
- Hollow Brick
- Hollow Lightweight Concrete Block
- Hollow Sand-lime Brick
- Hollow-core Slab

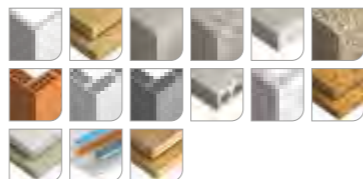

APPLICATIONS

- For all applications with a legal requirement for fire resistance class B-1 according to DIN 4102
- For fire-resistant filling of frame structures
- For fireproof assembly of PVC, wood and aluminum frames
- For fire-resistant sealing of joints in roofing, walls and ceilings

APPROVALS AND REPORTS

- ETA-13/1075
- ETA-13/1076



Rawplug code	Description	Volume	Colour	Quantity [pcs]		
				Box	Outer	Pallet
R-RPP-B1	Multi-season version	750ml	Pink	12	12	840
R-RPP-B1-WET	Tropical version	750ml	Pink	12	12	840



R-RPP-FIX

PU adhesive for bonding polystyrene and other insulation materials and decorative substrates




FEATURES AND BENEFITS

- Fixing possible just two hours after application.
- Highly efficient - coverage of about 8m² façades and approximately 12m² foundations
- Excellent adhesion to common building substrates and insulating materials
- Works at low temperatures (-5 °C) – longer working season
- High initial force & excellent insulation - does not create thermal or acoustic bridges

BASE MATERIALS

- Brick walls
- Hollow blocks
- Concrete
- Acrylic and mineral plasters
- Wood and Metal
- Foamed polystyrene
- PCV and rigid PUR foams and other insulation materials

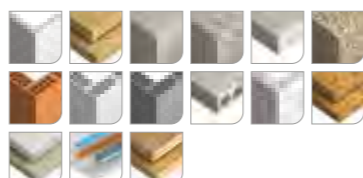

APPLICATIONS

- Bonding insulation boards on façades and foundations
- Suitable for ETICS* systems with mechanical fixings
- Bonding and insulating of wall panels, roofing sheets & tiles
- Sealing gaps between foamed polystyrene
- Sealing cracks in walls
- Filling & sealing expansion joints in thermal insulation
- Can stick to plasterboard

APPROVALS AND REPORTS

- ITB-KOT-2018-0531



Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPP-FIX	Multi-season version	750ml	12	12	672

RPP-FIX-60S EXPRESS POLYURETHANE ADHESIVE

NEW

Professional fast foam adhesive with high adhesion to many materials and substrates



FEATURES AND BENEFITS


- Initial tack after 60 seconds
- Mechanical anchoring after 2h
- Complete hardening time after 24h
- Wide range of applications
- Excellent adhesion to common construction materials
- Easy and convenient application

APPLICATIONS


- Installation of plasterboards and OSB boards for walls and floors
- For bonding expanded polystyrene boards (EPS), extruded polystyrene boards (XPS) and polyurethane rigid foam boards (PUR)
- Insulation of containers or garages
- Filling gaps in thermal insulation
- Fastening of ceramic blocks, aerated concrete blocks and silicate blocks
- Installation of window sills and stairs
- For bonding decorative elements, coffers, floor moldings

BASE MATERIALS

- Polystyrene (EPS) Boards
- Plasterboard
- PVC Profile
- Metal Sheet & Profiles
- XPS Extruded Polystyrene Insulation Boards
- Oriented Strand Board
- Mineral Wool Boards
- Timber
- Solid Brick
- Concrete
- Ceramic Hollow Block
- Silicate Blocks



Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
RPP-FIX-60S	Multi-season version	750ml	12	12	672

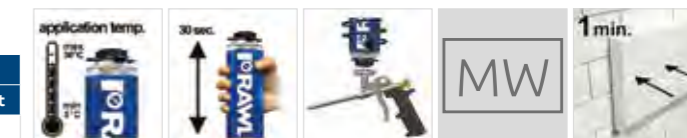

R-RPP-MORTAR

PU mortar for thin joints designed for internal and external walls of cellular concrete in dimensional class TLMB, hollow ceramic blocks and silicate blocks



FEATURES AND BENEFITS

- Energy efficiency - reduction of heat escape by thermal bridges ($\lambda \leq 0,036$)
- Durability - high mechanical properties, elasticity, bonding strength
- Effective yield - up to 12 square meters wall from one can
- Extended construction season - application temperature up to -5°C
- Savings of money & time - quicker building works, less tools & materials
- Easy & clean work - product ready to apply, no wastes, no dust, without lifting weights

APPLICATIONS

- Raising walls with thin joints, made of high-accuracy materials (flatness/height deviation not larger than 3 mm per running meter)
- Dedicated both for load-bearing walls and partition walls
- For internal and external applications
- Approved for aerated concrete, silicate blocks, hollow ceramic
- Suitable also for other the typical construction materials

BASE MATERIALS

- Suitable for bricklaying to use with:
- Aerated concrete
 - Silicate blocks
 - Hollow ceramic
- Also excellent adhesion to the typical construction materials, like:
- Cellular concrete blocks
 - Ceramic bricks
 - Hollow blocks
 - Concrete
 - Acrylic and mineral plasters
 - Wood
 - Foamed polystyrene



APPROVALS AND REPORTS

- AT-15-9752/2016



Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPP-MORTAR	Multi-season version	750ml	12	12	672

R-RPP-ROOF ROOFING ADHESIVE

Polyurethane adhesive with applicator gun, designed for bonding XPS and EPS boards for the flat roofs.



FEATURES AND BENEFITS



- Highly efficient - one can allows the installation of up to 12m² of thermal insulation.
- Possible application at -5°C which significantly prolongs the construction season
- Portable - no requirement for access to water and electricity.
- High strength characteristics and excellent adhesion to common construction materials

APPLICATIONS

- For bonding expanded polystyrene boards (EPS) and extruded polystyrene (XPS) to the flat roofs.
- For bonding expanded polystyrene insulation
- For bonding and insulation of wall panels, corrugated sheets, roof tiles, etc.
- Filling gaps in the thermal insulation of buildings
- For fixing various types of insulation boards

BASE MATERIALS

- Approved for use in:
- Polystyrene (EPS) Boards
 - XPS Extruded Polystyrene Insulation Boards
 - Concrete
 - Timber
 - Oriented Strand Board
 - Metal Sheet & Profiles

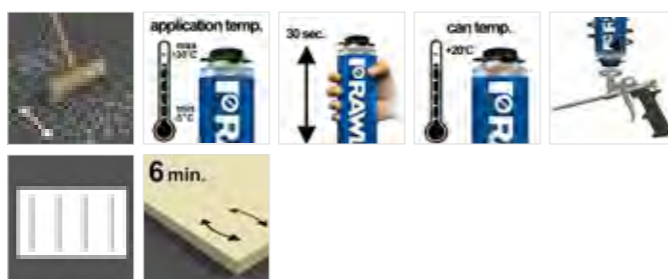

Rawplug code	Description	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-RPP-ROOF	Roofing Adhesive	750ml	12	12	672

R-RPC-0500 AGENT FOR REMOVING UNCURED POLYURETHANE FOAMS

High power cleaner for removing uncured polyurethane foams or adhesives and cleaning equipment



FEATURES AND BENEFITS

- Dissolves uncured polyurethane completely
- Perfectly degrease work surfaces (steel, glass, wood) before application of polyurethane or silicone
- Safe for the surface of PVC and most plastics

APPLICATIONS

- Cleaning of the gun after use with PU Expanding Foam
- Cleaning of the valves of the PU aerosol gun
- Removal of uncured foam



Rawplug code	Volume	Color	Quantity [pcs]		
			Box	Outer	Pallet
R-RPC-0500	500ml	transparent	12	12	672

RPP-GUN-NC PROFESSIONAL GUN FOR EXPANDING FOAMS

Professional grade metal polyurethane applicator gun for use with gun foams



FEATURES AND BENEFITS

- Solid construction
- Easy application
- Simple maintenance
- Adjusting the flow out of the foam
- Durability

APPLICATIONS

- For the application of PU foams and cleaners

Rawplug code	Quantity [pcs]		
	Box	Outer	Pallet
RPP-GUN-NC	1	24	288
RPP-GUN-LONG	1	6	60



DISINFECTION AGAINST VIRUSES AND BACTERIA



Disinfection of private, public and commercial areas

Disinfects skin hands

Recommended for people, electronics, industry, hospitals, sanitary facilities

Robust screw head for easy dismantling

Ethanol solution $\geq 80\%$

Complies with the WHO recommendations

Disinfects objects and surfaces contaminated by bacteria and viruses including COVID-19



R-DEZI DISINFECTANT SPRAY

Universal disinfectant spray with antiviral and antibacterial activities



FEATURES AND BENEFITS

- DEZI is a product registered in Office for Registration of Medicinal Products, Medical Devices and Biocidal Products
- Very strong - contains 88% of ethanol
- It has a refreshing scent - leaving your hands smelling like a green tea
- Complies with the WHO recommendations
- Disinfects 99% of surfaces
- Does not leave your hands dry - contains glycerine
- Recommended for people, electronics, industry, hospitals, sanitary facilities
- Antiviral and antibacterial activities
- DEZI doesn't contain water

APPLICATIONS

- Hands disinfection
- Disinfection of walls and floors in private, public and industrial spaces
- Disinfection of the screens, computers, keyboards, phones
- Disinfection of the material surfaces
- Disinfection of building materials
- Disinfection of sanitary facilities and toilets

BASE MATERIALS

Approved for use in:

- Toys
- Spa, hairdresser
- Workplaces, businesses
- Sanitary facilities, toilets
- Public and industrial areas
- Screens, computers, keyboards, phones

Rawlplug code	Density	Colour	Quantity	Volume
	[g/cm ³]	-	pack	[ml]
R-DEZI-150-EN	0,81	colourless	10	150
R-DEZI-400-EN	0,81	colourless	15	400



DEZI is a product registered in Office for Registration of Medicinal Products, Medical Devices and Biocidal Products, it guarantees effective prevention against viruses and bacteria.

DEZI obtained a long-term authorisation guaranteeing its effectiveness and continuity of supply.

DEZI has one of the highest concentrations of pure ethanol on the market, not less than 80% in each package.

DEZI can be used for human needs (skin of hands) and for most other surfaces used in daily life.

DEZI contains pharmaceutical glycerine protecting the user from skin irritation and dryness due to frequent use.

DEZI does not contain water and therefore it can disinfect electronic equipment such as computer SCREENS, TELEPHONES, KEYBOARDS. It can also work effectively against viruses, bacteria and fungi in INDUSTRIAL HALLS and RETAIL SPACE.

DEZI has non-intensive aromatic smell.

The aerosol type of product provides not only the convenience and optimal efficiency, but also creates an antiviral mist that covers 99% of the sprayed surfaces.

WHY DEZI?

DEZI can be used for human needs (skin of hands) and for most other surfaces used in daily life because of tests carried out and authorisations obtained in the CATEGORY: DISINFECTANTS for GR. 1 and GR. 2 products.

Overview of our range ✓



TYPE OF PRODUCT		R-SL-BUD	R-SL-NEU	R-SL-SAN	R-SL-UNI	R-SL-SKL	R-SL-TK	R-SL-LUS	R-SL-DEK	R-SL-DEK-SPEC	R-SL-MA	R-SL-MAGK	R-XPC-300
PRODUCT		Construction Silicone	Neutral Silicone	Sanitary Silicone	Universal Silicone	Glazing Silicone	High Temperature Silicone	Adhesive for Mirrors	Rubber Roof Sealant	Specialized Roof Sealant	Acrylic Sealant	Acrylic Sealant For Plasterboard	Uni-Repair Express Cement
	Filling expansion joints	✓	✓	-	✓	-	-	-	✓	✓	-	-	-
	Sealing windows & doors	✓	✓	-	✓	-	-	-	-	-	✓	✓	-
	Sealing of prefabricated construction elements	✓	✓	✓	✓	✓	-	✓	-	-	✓	✓	✓
	Sealing metal containers & tanks	✓	✓	-	-	-	-	-	✓	✓	✓	✓	-
	Connections between different metals	✓	✓	-	-	✓	-	✓	✓	✓	-	-	-
	Glazing all windows	-	✓	-	✓	✓	-	-	-	-	-	-	-
	Sealing in bathrooms & kitchens	✓	✓	✓	✓	✓	-	✓	-	-	-	-	-
	Sealing in marine & swimming pool applications	-	-	✓	-	-	-	-	-	-	-	-	-
	Sealing connections between treated and wood glass	✓	✓	-	-	-	-	✓	-	-	✓	✓	✓
	Fixing mirrors	-	-	-	-	-	-	✓	-	-	-	-	-
	High temperature applications	-	-	-	-	-	✓	-	-	-	-	-	-
	Filling of the gaps inside the buildings, scratches, cracks in gypsum plaster,	-	-	-	-	-	-	-	-	-	✓	✓	✓
	Sealing of break-through points in roofs and terraces.	-	-	-	-	-	-	-	✓	✓	-	-	✓
	Repairs for bitumen roof coverings	-	-	-	-	-	-	-	✓	✓	-	-	-
	Connection of corrugated and trapezoidal steel sheets	✓	✓	-	-	-	-	-	✓	✓	✓	✓	-

APPLICATIONS

R-SL-BUD CONSTRUCTION SILICONE

One-component, elastic sealant with neutral curing system and excellent adhesion to porous and smooth construction materials



FEATURES AND BENEFITS


- Highly and permanently elastic sealing properties
- Very good adhesion to most building materials.
- Durable seal (completely resistant to weathering and UV radiation)

APPLICATIONS

- Filling elastic expansion joints
- Filling joints behind window and door frames
- Sealing of prefabricated elements in construction
- Sealing of metal coolers, containers and tanks
- Connections between galvanized steel, brass and other metals

BASE MATERIALS

- Glass
- Metal Sheet & Profiles
- Stainless Steel
- Glaze
- Masonry
- Concrete
- Aerated Concrete Block



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-BUD-01-EN	transparent	300ml	15	15	1260
R-SL-BUD-02-EN	white	300ml	15	15	1260
R-SL-BUD-03-EN	grey	300ml	15	15	1260
R-SL-BUD-04-EN	brown	300ml	15	15	1260
R-SL-BUD-07-EN	black	300ml	15	15	1260

R-SL-SAN SANITARY SILICONE

One-component, elastic sealant with acetate curing system. Contains antifungal agents that prevent growth and development of mould.



FEATURES AND BENEFITS


- Highly and permanently elastic sealing properties, with excellent resistance to water, grease, acids and alkalis.
- Protects against the growth of fungi and mould
- Very good adhesion to materials and substrates used commonly in construction: glass, tiles, ceramics and protected metals
- Durable seal (completely resistant to weathering and UV radiation)

APPLICATIONS

- Sealing in areas with exposure to water: bathrooms, baths (incl. acrylic bathtubs), shower trays, shower enclosures and washbasins, as well as kitchens, laundries, sinks and worktops, etc.
- Do not use for fish tanks, mirrors, unprotected metals, natural stone or concrete.
- Sealing in areas with exposure to sea water: swimming pools, boats, port facilities, etc.
- Sealing of joints between sanitary ceramics and tiles.
- Sealing of worktops.

BASE MATERIALS

- Glass
- Protected metals (aluminium, brass, copper, steel, zinc-plated metal sheet)
- Terracotta
- Ceramics
- Glaze
- Protected wood
- Sanitary ceramics



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-SAN-01-EN	transparent	300ml	15	15	1260
R-SL-SAN-02-EN	white	300ml	15	15	1260
R-SL-SAN-03-EN	grey	300ml	15	15	1260

R-SL-NEU NEUTRAL SILICONE

One-component, elastic sealant with neutral curing system, resistant to weather conditions and UV radiation



FEATURES AND BENEFITS


- Highly and permanently elastic sealing properties
- Very good adhesion to most building materials.
- Durable seal (completely resistant to weathering and UV radiation)

APPLICATIONS

- Filling elastic expansion joints
- Filling joints behind window and door frames
- Sealing of prefabricated elements in construction
- Sealing of metal coolers, containers and tanks
- Connections between galvanized steel, brass and other metals

BASE MATERIALS

- Glass
- Metal Sheet & Profiles
- Stainless Steel
- Glaze
- Masonry
- Concrete
- Aerated Concrete Block



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-NEU-01-EN	transparent	300ml	15	15	1260
R-SL-NEU-02-EN	white	300ml	15	15	1260
R-SL-NEU-03-EN	grey	300ml	15	15	1260

R-SL-UNI UNIVERSAL SILICONE

One-component, elastic sealant with acetate curing system. Creates durable sealing which protects gaps against penetration of moisture and air.



FEATURES AND BENEFITS


- Highly and permanently elastic sealing properties, with excellent resistance to water, grease, acids and alkalis.
- Very good adhesion to materials and substrates used commonly in construction: glass, tiles, ceramics and protected metals
- Durable seal (completely resistant to weathering and UV radiation)

APPLICATIONS

- For standard glazing applications, as well as hotboxes for gardening.
- Sealing partition walls and window & door frames.
- Do not use for fish tanks, mirrors, unprotected metals, natural stone or concrete.

BASE MATERIALS

- Glass
- Protected metals (aluminium, brass, copper, steel, zinc-plated metal sheet)
- Terracotta
- Ceramics
- Glaze
- Protected wood



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-UNI-01-EN	transparent	300ml	15	15	1260
R-SL-UNI-02-EN	white	300ml	15	15	1260
R-SL-UNI-03-EN	grey	300ml	15	15	1260
R-SL-UNI-04-EN	brown	300ml	15	15	1260

R-SL-SKL GLASS SILICONE

One-component, elastic sealant with acetate curing system for bonding and sealing glass constructions.



FEATURES AND BENEFITS


- Highly and permanently elastic sealing properties, with excellent resistance to water, grease, acids and alkalis.
- Very good adhesion to materials and substrates used commonly in construction: glass, tiles, ceramics and protected metals
- Durable seal (completely resistant to weathering and UV radiation)

APPLICATIONS

- For standard glazing applications, as well as hotboxes for gardening.
- Sealant for glass-to-glass applications.
- Installation of cabinets, cupboards, shop-windows, glass displays, etc.
- Suitable for joining of: aluminum, brass, copper, steel, galvanized steel, plastic, concrete and many other materials.
- Do not use for fish tanks, mirrors, or for bonding natural stone surfaces.
- Joints are mould resistant.

BASE MATERIALS

- Glass
- Metal Sheet & Profiles
- Stainless Steel
- Glaze
- Concrete
- Protected wood
- Plastics
- Protected metals (aluminium, brass, copper, steel, zinc-plated metal sheet)



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-SKL-01-EN	transparent	300ml	15	15	1260
R-SL-SKL-02-EN	white	300ml	15	15	1260

R-SL-TK HIGH TEMPERATURE SILICONE

One-component, elastic sealant with acetate curing system resistant to long exposure to low and high temperatures



FEATURES AND BENEFITS


- The seal possesses complete and long-term resistance to oils, petrol, grease, diesel & coolants.
- Resistant to changeable weather conditions, temperature extremes (up to 350°C) and UV radiation.
- Highly and permanently elastic sealing properties

APPLICATIONS

- Sealing in high-temperature environments: furnaces, chimneys, heating installations, combustion & flue ducts, ventilation and air-conditioning systems.
- Fixing of elements in domestic fireplaces and industrial furnaces.

BASE MATERIALS

- Glass
- Protected metals (aluminium, brass, copper, steel, zinc-plated metal sheet)
- Ceramics
- Glaze
- Concrete
- Masonry
- Plastics
- Metal Sheet & Profiles



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-TK-05-EN	red	300ml	15	15	1260
R-SL-TK-07-EN	black	300ml	15	15	1260

R-SL-LUS MIRROR SILICONE ADHESIVE

Solvent-free adhesive recommended for bonding mirrors to common building substrates



FEATURES AND BENEFITS

- Intended for non-invasive fixing and adhesion of mirrors and glass mosaics.
- Excellent adhesion to most materials and substrates used in construction.
- Texture and colour suitable for use for sealing mirror edges.
- Warranty covers against discolouration of base materials.

APPLICATIONS

- Adhesion of decorative mirrors to varied substrates, even at low temperatures (5°C).
- Fixing mirror mosaics (mirror-mirror bonding) in shower cabinets.
- Adhesion of mirrors to substrates exposed to vibration and stress (new-build environments).
- Fixing mirrors and large glass panels such as Lacobel (e.g. on sliding wardrobe doors).
- Grouting mirrors edges (subsequent to full hardening of the pre-applied adhesive).
- Adhesion of mirrors with metal, wood or plastic frames.
- External fixing of glass components.

BASE MATERIALS

- Glass
- Wood
- Tiles
- Brick



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-LUS-01-EN	transparent	300ml	15	15	1260

R-SL-DEK RUBBER ROOF SEALANT

Elastic rubber sealant for roofing applications with high resistance to weather conditions.



FEATURES AND BENEFITS

- For the majority of seals in roofing applications.
- Adheres to substrates including: sheet metal, bitumen, concrete, stone, metal, wood, glass and most plastics.
- Can be painted after hardening.
- Resistant to weathering, temperature extremes and UV radiation.

APPLICATIONS

- Sealing of roof flashings, terraces, chimneys and hatches.
- Sealing of break-through points in roofs and terraces.
- Repairs for bitumen roof coverings.
- Sealing skylights and roof windows.
- Connections of trapezoidal and corrugated sheets, asbestos-cement and bituminous sheets.
- Connections between foundation and basement wall components, as well as filling expansion joints of roofs and terraces.

BASE MATERIALS

- Glass
- Metal Sheet & Profiles
- Stainless Steel
- Glaze
- Concrete
- High-Density Natural Stone
- Wood
- Plastics
- Bituminous substrates
- Tile



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-DEK-01-EN	transparent	300ml	15	15	1260
R-SL-DEK-02-EN	white	300ml	15	15	1260
R-SL-DEK-04-EN	brown	300ml	15	15	1260
R-SL-DEK-06-EN	brick red	300ml	15	15	1260
R-SL-DEK-07-EN	black	300ml	15	15	1260

R-SL-DEK-SPEC SPECIALIZED ROOF SEALANT

Plastic roof sealant characterized by the possibility of underwater application and during heavy rainfall



FEATURES AND BENEFITS


- Sealing of roof flashings, terraces, chimneys and hatches.
- Sealing of break-through points in roofs and terraces.
- Repairs for bitumen roof coverings.
- Sealing skylights and roof windows.
- Connections of trapezoidal and corrugated sheets, asbestos-cement and bituminous sheets.
- Connections between foundation and basement wall components, as well as filling expansion joints of roofs and terraces.

APPLICATIONS

- For the majority of seals in roofing applications.
- Adheres to substrates including: sheet metal, bitumen, concrete, stone, metal, wood, glass and most plastics.
- Can be painted after hardening.
- Resistant to weathering, temperature extremes and UV radiation.
- Permanently plastic - resistant for cracking

BASE MATERIALS

- Glass
- Metal Sheet & Profiles
- Stainless Steel
- Ceramics
- Concrete
- High-Density Natural Stone
- Wood
- Aluminium
- Bituminous substrates
- Tile



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-DEK-01-SPEC-EN	colourless	300ml	15	15	1260
R-SL-DEK-04-SPEC-EN	brown	300ml	15	15	1260
R-SL-DEK-06-SPEC-EN	brick red	300ml	15	15	1260
R-SL-DEK-07-SPEC-EN	graphite	300ml	15	15	1260

R-SL-MA UNIVERSAL ACRYLIC

Flexible acrylic dispersion sealant recommended for filling gaps, cracks and crevices in walls



FEATURES AND BENEFITS


- Solvent-free
- Flexible plastic joint, water-resistant after curing.
- Can be painted when fully-cured.
- Suitable for most construction substrates.
- Designed for internal and external use, with resistance to changeable weather conditions, once cured.

APPLICATIONS

- Filling of joints and corner joints in the connections between gypsum and cardboard and similar finishing materials in drywall systems.
- Filling of the gaps inside the buildings, scratches, cracks in gypsum plaster, gypsum blocks and precasts of similar type.
- Grouting of joints between walls and floor tiles, baseboards, ceiling moldings, suspended ceilings and parapets.
- Small repairs before painting
- Filling around the windows, window sills and door frames

BASE MATERIALS

- Metal Sheet & Profiles
- Stainless Steel
- Ceramics
- Concrete
- Masonry
- Wood
- Plasterboard
- High-Density Natural Stone
- PVC Profile
- Plaster



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-MA-02-EN	white	300ml	15	15	1260

R-SL-MA-FAST LIGHT FAST ACRYLIC

Flexible acrylic dispersion sealant ready for painting after just 20 minutes



FEATURES AND BENEFITS


- Perfect adhesion to the most building materials (including porous)
- No shrinkage - can be applied with a thin layer without the risk of shrinkage and cracking
- Easy and fast application and work- filling, smoothing and polishing seals
- No need to use Anti-Scratch Tape
- Dust-free grinding
- For interior use

APPLICATIONS

- Filling cracks in walls and ceilings
- Fast repair defects in cracks - can be sanded and painted 20 min after application
- Grouting connections joints of drywall boards
- Covering screw heads & bolts
- Filling joints during installation of partition walls and suspended ceilings

BASE MATERIALS

- Concrete
- Masonry
- Wood
- Plasterboard
- Oriented Strand Board
- High-Density Natural Stone
- Plaster



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-MA-02-FAST	white	300ml	15	15	1260

R-SL-MAGK ACRYLIC FOR DRYWALL

Flexible acrylic dispersion sealant recommended for filling gaps and cracks in drywalls



FEATURES AND BENEFITS


- For joining of plasterboard sheets in attics.
- Solvent-free
- Flexible plastic joint, water-resistant after curing.
- Can be painted when fully-cured.
- Suitable for most construction substrates.
- Designed for internal and external use, with resistance to changeable weather conditions, once cured.

APPLICATIONS

- Filling of joints and corner joints in the connections between gypsum and cardboard and similar finishing materials in drywall systems.
- Grouting of joints between walls and floor tiles, baseboards, ceiling moldings, suspended ceilings and parapets.
- Connections between panels and frames, masking strips and joinery.
- Filling of the gaps inside the buildings, scratches, cracks in gypsum plaster, gypsum blocks and precasts of similar type.

BASE MATERIALS

- Plasterboard
- Metal Sheet & Profiles
- Ceramics
- Concrete
- Masonry
- Wood
- Glass
- High-Density Natural Stone
- Plaster



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-MAGK-02	white	300ml	15	15	1260

R-XPC-300 EXPRESS CEMENT

NEW

One-component, ready to use repair mortar for sealing cracks



R-XPC

FEATURES AND BENEFITS


- Repairing mortar is resistant to changing weather conditions (from -20°C to +70°C) and UV radiation.
- Mortar can be applied to slightly wet surfaces.
- Saves time - no need for pre-mixing.
- Mortar is suitable for indoor and outdoor applications.
- Excellent adhesion to common building substrates.

APPLICATIONS

- Repairing masonry joints and roof tiles
- Repairing chipped edges
- General repair work
- Sealing and filling gaps
- Sealing cracks and scratches in walls
- Fixing roof tiles

BASE MATERIALS

- Plasterboard
- Metal Sheet & Profiles
- Ceramics
- Concrete
- Masonry
- Wood
- Glass
- High-Density Natural Stone
- Plaster



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-XPC-300-GREY-EN	grey	300ml	12	12	1008
R-XPC-300-SAND-EN	sand	300ml	12	12	1008

R-SL-FIX-HYBR HYBRID SEALANT ADHESIVE

Flexible adhesive sealant perfect for using in places where transparent joint is required



R-SL-FIX

FEATURES AND BENEFITS


- Bonding and sealing of many construction materials such as natural stone, wood, concrete, metal, brick, glass, mirrors, metal, ceramics, plaster, polyurethane, plastics, chipboards, etc.
- Flexible connections in vibrating elements.
- Industrial seals (cold rooms, automotive, containers, glazing, etc.).
- The connections between galvanized steel, brass and other metals.
- Ideal as a sealant. It can be used for sealing in bathroom and kitchen or in other places where protection against water penetration is required.

APPLICATIONS

- Excellent adhesion to common construction materials
- Solvent and isocyanates free - can be painted
- Excellent transparency, precise and invisible joints
- Can be applied on wet substrates
- Odorless, insensitive to chemicals - weak acids, alkalis, solvents and oils
- Can be painted after curing (including water paints)

BASE MATERIALS

- Concrete
- Masonry
- Wood
- Plasterboard
- Oriented Strand Board
- Plaster
- Cork
- High-Density Natural Stone



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-FIX-01-HYBR	transparent	300ml	15	15	1260

R-SL-FIX-SBS MOUNTING ADHESIVE SBS

Universal contact adhesive with very good adhesion to commonly used building materials. Recommended for renovation and finishing works in construction.



R-SL-FI

FEATURES AND BENEFITS


- Very good adhesion to wood, MDF, HDF, concrete, plaster, brick, metal, glass, hard PVC, and the most common materials in the building industry
- High bonding strength
- Remains flexible after hardening
- Ideal for renovations and finishing works
- Fast curing and effective penetration of the substrate

APPLICATIONS

- Installation of panels, profiles, moldings and wall skirtings.
- Bonding of window sills, plafonds, stone and ceramic tiles.
- Fixing of doorsteps, stairs and cornices.
- Should not be applied on styrofoam.

BASE MATERIALS

- Concrete
- Masonry
- Wood
- Plasterboard
- Oriented Strand Board
- High-Density Natural Stone
- PVC Profile
- Glass



Rawplug code	Colour	Volume	Quantity [pcs]		
			Box	Outer	Pallet
R-SL-FIX-08-SBS	beige	300ml	15	15	1260




” POS Offer made by Rawlplug®

POS type of packaging	318
Combo pack	320
Rawlbag	326
B-pack packaging	341
B-pack & Rawlbag solutions kits	344
Jar packaging	349
Packaging for loose products	352
POS offer and color coding	356
Universal materials	358
Plasterboard	361
Solid walls	363
Timber	368
MIX of substrates	372
Promopack	373
Display Racks	374





”COMBO PACK 01



R-FF1 NYLON FRAME FIXING

Universal frame fixing for many applications countersunk head



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-FF1N-08L080	26	125x55x187	8	80	12	12	5906675438955
R-SL1-FF1N-08L100	24	125x55x187	8	100	12	12	5906675438962
R-SL1-FF1N-08L120	20	125x55x187	8	120	12	12	5906675438979
R-SL1-FF1N-10L080	20	125x55x187	10	80	12	12	5906675438986
R-SL1-FF1N-10L100	16	125x55x187	10	100	12	12	5906675438993
R-SL1-FF1N-10L120	12	125x55x187	10	120	12	12	5906675439006

R-FF1 NYLON FRAME FIXING

Universal frame fixing for many applications countersunk head




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-FF1N-10K080	20	125x55x187	10	80	12	12	5906675438924
R-SL1-FF1N-10K100	16	125x55x187	10	100	12	12	5906675438931
R-SL1-FF1N-10K120	12	125x55x187	10	120	12	12	5906675438948

UNO UNIVERSAL PLUG

Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-SL1-UNO-05+3530	100	125x55x187	5	24	3.5x30	12	12	5906675438818
R-SL1-UNO-06+4035	100	125x55x187	6	28	4.0x35	12	12	5906675438825
R-SL1-UNO-07+4040	100	125x55x187	7	30	4.0x40	12	12	5906675438832
R-SL1-UNO-08+4540	100	125x55x187	8	32	4.5x40	12	12	5906675438849
R-SL1-UNO-10+5045	50	125x55x187	10	36	5.0x45	12	12	5906675438856



UNIVERSAL U

4ALL UNIVERSAL NYLON PLUG WITH SCREW

High performance nylon plug with screw for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-SL1-4ALL-05+3530	100	125x55x187	5	25	3.5x30	12	12	5906675445502
R-SL1-4ALL-06+4540	100	125x55x187	6	30	4.5x40	12	12	5906675445519
R-SL1-4ALL-08+5060	50	125x55x187	8	40	5.0x60	12	12	5906675445533
R-SL1-4ALL-10+6060	25	125x55x187	10	50	6.0x60	12	12	5906675445557
R-SL1-4ALL06L+4560	60	125x55x187	6	50	4.5x60	12	12	5906675438887
R-SL1-4ALL08L+5080	40	125x55x187	8	65	4.5x80	12	12	5906675438900



PLASTERBOARD P

R-DRA SELF DRILL FIXING FOR PLASTERBOARD


Self-drilling light-duty nylon fixing for use in plasterboard sheets and gypsum fibreboards



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-SL1-DRA01	100	125x55x187	14	22		12	12	5906675438658
R-SL1-DRA01+3932	100	125x55x187	14	22	3.9x32	12	12	5906675438665
R-SL1-DRA02	100	125x55x187	13	31		12	12	5906675438672
R-SL1-DRA02+4534	100	125x55x187	13	31	4.5x34	12	12	5906675438689

R-SM INTERSET HOLLOW WALL ANCHOR

Interaset fixing for permanent anchorages in cavity walls. Zinc-plated metal fixing with metric screw

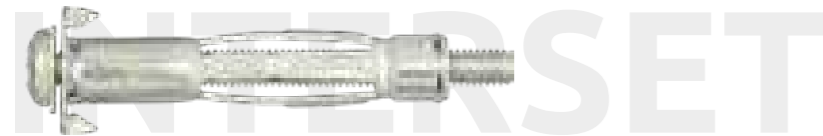


Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-SM04032	100	125x55x187	M4	32	12	12	5906675438726
R-SL1-SM04038	100	125x55x187	M4	38	12	12	5906675438733
R-SL1-SM04046	50	125x55x187	M4	46	12	12	5906675438740
R-SL1-SM05037	50	125x55x187	M5	37	12	12	5906675438757
R-SL1-SM05052	50	125x55x187	M5	52	12	12	5906675438764
R-SL1-SM05065	40	125x55x187	M5	65	12	12	5906675438771
R-SL1-SM06037	50	125x55x187	M6	37	12	12	5906675438788
R-SL1-SM06052	40	125x55x187	M6	52	12	12	5906675438795
R-SL1-SM06065	30	125x55x187	M6	65	12	12	5906675438801



PLASTERBOARD P

R-SPO SPRING TOGGLE

Spring toggle single or double thickness plasterboard and large fixtures



SPRING TOGGLE



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-SL1-SPO3050	100	125x55x187	M3		M3x50 mm	12	12	5906675438702
R-SL1-SPO5050	80	125x55x187	M5		M5x50 mm	12	12	5906675438719


R-GPB TAP-IT HAMMER IN FIXING FOR PLASTERBOARD



TAP-IT



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-SL1-GPB+4040	100	125x55x187	10,5	30	4.0x40	12	12	5906675438641



SOLID WALLS S

R-FX-N-L NYLON HAMMER-IN FIXING WITH COUNTERSUNK HEAD


The nylon hammer fixing with countersunk head for fast, simple, cost-effective installations



FX-N-L



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-FXN-05L040	100	125x55x187	5	40	12	12	5906675438467
R-SL1-FXN-06L040	100	125x55x187	6	40	12	12	5906675438474
R-SL1-FXN-06L060	50	125x55x187	6	60	12	12	5906675438481
R-SL1-FXN-06L080	50	125x55x187	6	80	12	12	5906675438498
R-SL1-FXN-08L060	25	125x55x187	8	60	12	12	5906675438504
R-SL1-FXN-08L080	25	125x55x187	8	80	12	12	5906675438511
R-SL1-FXN-08L100	25	125x55x187	8	100	12	12	5906675438528
R-SL1-FXN-08L120	25	125x55x187	8	120	12	12	5906675438535



SOLID WALLS S

R-FX-N-K NYLON HAMMER-IN FIXING WITH MUSHROOM HEAD

The nylon hammer fixing with mushroom head for fast, simple, cost-effective installations



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-FXN-06K040	100	125x55x187	6	40	12	12	5906675438542
R-SL1-FXN-06K060	50	125x55x187	6	60	12	12	5906675438559
R-SL1-FXN-06K080	50	125x55x187	6	80	12	12	5906675438566

R-FX-N-C NYLON HAMMER-IN FIXING WITH CYLINDER HEAD

The nylon hammer fixing with cylinder head for fast, simple, cost-effective installations



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-FXN-05C025	100	125x55x187	5	25	12	12	5906675438573
R-SL1-FXN-05C035	100	125x55x187	5	35	12	12	5906675438580
R-SL1-FXN-06C040	100	125x55x187	6	40	12	12	5906675438597
R-SL1-FXN-06C060	50	125x55x187	6	60	12	12	5906675438603
R-SL1-FXN-06C080	50	125x55x187	6	80	12	12	5906675438610
R-SL1-FXN-08C060	25	125x55x187	8	60	12	12	5906675438634



TIMBER T

R-DSX DECKING SCREWS

Decking screws for outdoor applications of wood and chipboard



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-SL1-DSX-4030	400	125x55x187	4	30	12	12	5906675425610
R-SL1-DSX-4040	400	125x55x187	4	40	12	12	5906675425634
R-SL1-DSX-4050	200	125x55x187	4	50	12	12	5906675425641
R-SL1-DSX-4060	200	125x55x187	4	60	12	12	5906675425658
R-SL1-DSX-5050	200	125x55x187	5	50	12	12	5906675425665
R-SL1-DSX-5060	200	125x55x187	5	60	12	12	5906675425672
R-SL1-DSX-5070	150	125x55x187	5	70	12	12	5906675425689
R-SL1-DSX-5080	100	125x55x187	5	80	12	12	5906675425696
R-SL1-DSX-5100	100	125x55x187	5	100	12	12	5906675425702
R-SL1-DSX-5120	100	125x55x187	5	120	12	12	5906675425719



TIMBER T

R-PTX CONSTRUCTION SCREW WITH COUNTERSUNK HEAD AND PARTIAL THREAD


Construction screw with countersunk head and partial thread



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]			Quantity [pcs]	
			Diameter	Length	Length L1	Box	Outer
R-SLM1-PTX-3016	200	125x55x94	3	16	10	24	24
R-SLM1-PTX-3020	200	125x55x94	3	20	12	24	24
R-SLM1-PTX-3025	170	125x55x94	3	25	15	24	24
R-SLM1-PTX-3030	150	125x55x94	3	30	17	24	24
R-SLM1-PTX-3035	120	125x55x94	3	35	21	24	24
R-SLM1-PTX-3516	200	125x55x94	3.5	16	16	24	24
R-SLM1-PTX-3520	200	125x55x94	3.5	20	12	24	24
R-SLM1-PTX-3525	170	125x55x94	3.5	25	15	24	24
R-SLM1-PTX-3530	150	125x55x94	3.5	30	17	24	24
R-SLM1-PTX-3535	120	125x55x94	3.5	35	21	24	24
R-SLM1-PTX-3540	100	125x55x94	3.5	40	24	24	24
R-SLM1-PTX-3545	100	125x55x94	3.5	45	25	24	24
R-SLM1-PTX-3550	80	125x55x94	3.5	50	30	24	24
R-SLM1-PTX-4030	150	125x55x94	4	30	17	24	24
R-SLM1-PTX-4035	120	125x55x94	4	35	21	24	24
R-SLM1-PTX-4040	100	125x55x94	4	40	25	24	24
R-SLM1-PTX-4045	100	125x55x94	4	45	25	24	24
R-SLM1-PTX-4050	100	125x55x94	4	50	30	24	24
R-SLM1-PTX-4060	70	125x55x94	4	60	35	24	24
R-SLM1-PTX-4070	50	125x55x94	4	70	40	24	24
R-SLM1-PTX-4535	100	125x55x94	4.5	35	19	24	24
R-SLM1-PTX-4540	80	125x55x94	4.5	40	25	24	24
R-SLM1-PTX-4545	80	125x55x94	4.5	45	25	24	24
R-SLM1-PTX-4550	70	125x55x94	4.5	50	30	24	24
R-SLM1-PTX-4560	50	125x55x94	4.5	60	35	24	24
R-SLM1-PTX-4570	40	125x55x94	4.5	70	40	24	24
R-SLM1-PTX-4580	30	125x55x94	4.5	80	50	24	24
R-SLM1-PTX-5035	80	125x55x94	5	35	19	24	24
R-SLM1-PTX-5040	60	125x55x94	5	40	25	24	24
R-SLM1-PTX-5045	60	125x55x94	5	45	25	24	24
R-SLM1-PTX-5050	50	125x55x94	5	50	30	24	24
R-SLM1-PTX-5055	40	125x55x94	5	55	35	24	24
R-SLM1-PTX-5060	30	125x55x94	5	60	35	24	24
R-SLM1-PTX-5070	20	125x55x94	5	70	40	24	24
R-SLM1-PTX-5080	20	125x55x94	5	80	50	24	24
R-SLM1-PTX-5090	20	125x55x94	5	90	50	24	24
R-SL1-PTX-50100	20	125x55x187	5	100	60	12	12
R-SL1-PTX-50120	20	125x55x187	5	120	60	12	12
R-SLM1-PTX-6060	50	125x55x94	6	60	35	24	24
R-SLM1-PTX-6070	40	125x55x94	6	70	40	24	24
R-SLM1-PTX-6080	30	125x55x94	6	80	50	24	24
R-SLM1-PTX-6090	25	125x55x94	6	90	50	24	24
R-SL1-PTX-60100	20	125x55x187	6	100	60	12	12
R-SL1-PTX-60110	20	125x55x187	6	110	60	12	12
R-SL1-PTX-60120	20	125x55x187	6	120	60	12	12
R-SL1-PTX-60130	20	125x55x187	6	130	60	12	12
R-SL1-PTX-60140	20	125x55x187	6	140	70	12	12
R-SL1-PTX-60150	20	125x55x187	6	150	70	12	12
R-SL1-PTX-60160	20	125x55x187	6	160	70	12	12



”RAWLBAG 02



R-FF1 NYLON FRAME FIXING

Universal frame fixing for many applications - countersunk head



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-FF1N08L080/6	6	95x220	8	80	5	20	5906675310046
R-S1-FF1N08L100/6	6	95x220	8	100	5	20	5906675310060
R-S1-FF1N08L120/6	6	95x220	8	120	5	20	5906675310084
R-S1-FF1N10L080/6	6	95x220	10	80	5	20	5906675093505
R-S1-FF1N10L100/6	6	95x220	10	100	5	20	5906675093512
R-S1-FF1N10L120/4	4	95x220	10	120	5	20	5906675093543
R-S1-FF1N10L140/4	4	95x220	10	140	5	20	5906675093567
R-S1-FF1N10L160/4	4	95x220	10	160	5	5	5906675426679
R-S1-FF1N10L200/4	4	95x220	10	200	5	5	5906675426686

R-FF1 NYLON FRAME FIXING

Universal frame fixing for many applications - with collar




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-FF1N10K080/6	6	95x220	10	80	5	20	5906675093420
R-S1-FF1N10K100/6	6	95x220	10	100	5	20	5906675093444
R-S1-FF1N10K120/4	4	95x220	10	120	5	20	5906675093468
R-S1-FF1N10K140/4	4	95x220	10	140	5	20	5906675093482

UNO UNIVERSAL PLUG

Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-UNO-05/20	20	80x145	5	24	5	30	5906675159614
R-S1-UNO-05/50	50	95x165	5	24	5	25	5906675095424
R-S1-UNO-06/16	16	80x145	6	28	5	30	5906675159652
R-S1-UNO-06/50	50	95x165	6	28	5	25	5906675095448
R-S1-UNO-07/40	40	95x165	7	30	5	25	5906675095462
R-S1-UNO-08/12	12	80x145	8	32	5	30	5906675159690
R-S1-UNO-08/30	30	95x165	8	32	5	25	5906675095486
R-S1-UNO-10/20	20	95x165	10	36	5	25	5906675095516



UNIVERSAL U

UNO UNIVERSAL PLUG

Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging type	Packaging size [mm]	Product [mm]	Quantity [pcs]		Bar Code
					Box	Outer	
R-U1-YEL-48-C	48	clip	70x190x13	5x24	20	20	5906675419312
R-U1-YEL-96-C	96	clip	70x190x25	5x24	10	10	5010445685002
R-U1-RED-48-C	48	clip	75x200x15	6x28	20	20	5010445685156
R-U1-RED-96-C	96	clip	75x200x30	6x28	10	10	5010445685200
R-U1-BRN-48-C	48	clip	80x220x16	7x30	20	20	5010445685552
R-U1-BRN-96-C	96	clip	80x220x30	7x30	10	10	5010445685606
R-U1-BLU-40-C	40	clip	85x205x18	8x32	20	20	5906675166735
R-U1-BLU-80-C	80	clip	85x205x35	8x32	10	10	5010445685958
R-U1-GRY-40-C	40	clip	95x240x23	10x36	20	20	5906675166797
R-U1-GRY-80-C	80	clip	95x240x45	10x36	10	10	5010445686153
R-U1-MIX-BRN-288	288	wrap	80x90x160	7x30	4	4	5010445685651
R-U1-MIX-RED-288	288	wrap	75x80x150	6x28	4	4	5010445685255
R-U1-MIX-RBB-272	272	wrap	85x95x205	6x28; 7x30; 8x32	4	4	5010445686351
R-U1-MIX-YRBR-144	144	wrap	80x45x220	5x24; 6x28; 7x30	10	10	590667533939

UNO UNIVERSAL PLUG - MIX


Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]	Quantity [pcs]		Bar Code
				Box	Outer	
R-S1-UNO-BB	40; 20	95x220	7x30; 8x32	5	20	5906675095530
R-S1-UNO-RB	20; 20	95x165	6x28; 7x30	5	25	5906675095639
R-S1-UNO-RBB	20; 20; 20	95x165	5x24; 7x30; 8x32	5	25	5906675095653
R-S1-UNO-RBG	30; 20; 10	95x220	6x28; 8x32; 10x36	5	20	5906675095660
R-S1-UNO-YRB	10; 12; 8	95x165	5x24; 6x28; 8x32	5	25	5906675095677
R-S1-UNO-YRBBG	20; 20; 15; 15; 10	95x220	5x24; 6x28; 7x30; 8x32; 10x36	5	20	5906675095707

UNO UNIVERSAL PLUG WITH SCREW

Truly universal plug which fixes into any base material, solid or hollow



UNIVERSAL U

UNO UNIVERSAL PLUG WITH SCREW (cont.)

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-UNO-05+/12	12	080-145	5	24	3.5x30	5	30	5906675159638
R-S1-UNO-05+/24	24	095X165	5	24	4.0x35	5	25	5906675280479
R-S1-UNO-05+/40	40	095X165	5	24	3.5x30	5	25	5906675095431
R-S1-UNO-06+/10	10	080-145	6	28	4.0x30	5	30	5906675159676
R-S1-UNO-06+/24	24	095X165	6	28	4.5x40	5	25	5906675391991
R-S1-UNO-06+/36	36	095X165	6	28	4.0x30	5	25	5906675095455
R-S1-UNO-07+/24	24	095X165	7	30	4.0x40	5	25	5906675095479
R-S1-UNO-08+/20	20	095X165	8	32	4.5x40	5	25	5906675095509
R-S1-UNO-08+/8	8	080-145	8	32	4.5x40	5	30	5906675159713
R-S1-UNO-10+/15	15	095X165	10	36	5.0x45	5	25	5906675095523
R-S1-UNO-06+/50	50	095X220	6	28	4.0x35	5	15	5906675431666
R-S1-UNO-08+/50	50	145X220	8	32	4.5x40	5	10	5906675431673
R-S1-UNO-10+/50	50	145X220	10	36	5.0x45	5	10	5906675431680

UNO UNIVERSAL PLUG WITH SCREW - MIX

Truly universal plug which fixes into any base material, solid or hollow




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]	Screw	Quantity [pcs]		Bar Code
					Box	Outer	
R-S1-UNO-RB+	12/12	95x165	6x28; 7x30	4.0x30; 4.0x40	5	25	5906675095646
R-S1-UNO-YRB+	20; 20; 20	95x220	5x24; 6x28; 8x32	3.5x30; 4.0x35; 4.5x40	5	15	5906675095684
R-S1-UNO-YRBB+	10/10/8/8	95x165	5x24; 6x28; 7x30; 8x32	3.5x30; 4.0x30; 4.0x40; 4.5x40	5	25	5906675095691
R-S1-UNO-YRBBG+	10; 10; 10; 10; 10	95x220	5x24; 6x28; 7x30; 8x32; 10x36	3.5x30; 4.0x30; 4.0x40; 4.5x40; 5.0x45	5	15	5906675095714
R-S1-UNO-YRBBG+S	30/20/20/15/10	145x220	5x24; 6x28; 7x30; 8x32; 10x36	3.5x30; 4.0x30; 4.0x40; 4.5x40; 5.0x45	5	10	5906675095721

4ALL UNIVERSAL NYLON PLUG

High performance nylon plug for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-4ALL-05/100	100	95x165	5	25	5	25	5906675093116
R-S1-4ALL-05/26	26	80x145	5	25	5	30	5906675064185
R-S1-4ALL-06/20	20	80x145	6	30	5	30	5906675064215
R-S1-4ALL-06/80	80	95x165	6	30	5	25	5906675093154
R-S1-4ALL-08/14	14	95x165	8	40	5	25	5906675064239
R-S1-4ALL-08/20	20	95x165	8	40	5	25	5906675093192
R-S1-4ALL-08/60	60	95x220	8	40	5	20	5906675093208
R-S1-4ALL-10/12	12	95x165	10	50	5	25	5906675093239
R-S1-4ALL-10/25	25	95x220	10	50	5	20	5906675093246
R-S1-4ALL-10/8	8	95x165	10	50	5	25	5906675064253
R-S1-4ALL-12/6	6	95x165	12	60	5	25	5906675310107
R-S1-4ALL-14/4	4	95x165	14	70	5	25	5906675310138



UNIVERSAL U

4ALL UNIVERSAL NYLON PLUG WITH SCREW

High performance nylon plug for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-4ALL-05+/20	20	80x145	5	25	3.5x30	5	30	5906675064208
R-S1-4ALL-05+/40	40	95x165	5	25	3.5x30	5	25	5906675093123
R-S1-4ALL-06+/14	14	80x145	6	30	4.5x40	5	30	5906675064222
R-S1-4ALL-06+/30	30	95x165	6	30	4.5x40	5	25	5906675093161
R-S1-4ALL-08+/10	10	95x165	8	40	5.0x60	5	25	5906675064246
R-S1-4ALL-10+/10	10	95x165	10	50	6.0x60	5	25	5906675093253
R-S1-4ALL-10+/8	8	95x165	10	50	6.0x60	5	25	5906675064260

4ALL UNIVERSAL NYLON PLUG WITH HEXAGONAL SCREW

High performance nylon plug for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-4ALL-12/100/4	4	95x165	12	60	8x100	5	25	5906675310114
R-S1-4ALL-12/80/4	4	95x165	12	60	8x80	5	25	5906675310121
R-S1-4ALL-14/100/2	2	95x165	14	70	10x100	5	25	5906675310145

4ALL UNIVERSAL NYLON PLUG WITH ANGLE HOOK




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-4ALL-05K/12	12	80x145	5	25	3.5x50	5	30	5906675093130
R-S1-4ALL-06K/10	10	80x145	6	30	3.5x50	5	30	5906675093178
R-S1-4ALL-08K/8	8	80x145	8	40	4.5x70	5	30	5906675093215
R-S1-4ALL-10SK/4	4;4	95x165	10	50	6.0x60; 6.0x80	5	25	5906675093260

4ALL UNIVERSAL NYLON PLUG WITH ROUND HOOK



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-4ALL-05S/12	12	80x145	5	25	3.5x60	5	30	5906675093147
R-S1-4ALL-06S/10	10	80x145	6	30	3.5x60	5	30	5906675093185
R-S1-4ALL-08S/8	8	80x145	8	40	4.5x80	5	30	5906675093222



UNIVERSAL U

4ALL UNIVERSAL NYLON LONG PLUG WITH SCREW



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-4ALL-06L/12	12	95x165	6	50		5	25	5906675390789
R-S1-4ALL-06L+/8	8	95x165	6	50	4.5x60	5	25	5906675390840
R-S1-4ALL-08L/8	8	95x165	8	65		5	25	5906675390796
R-S1-4ALL-08L+/6	6	95x165	8	65	5.0x80	5	25	5906675390864

R-RNT RAWLNUT FLEXI PLUG


Easy-to-install plug giving exceptional resistance to vibration and corrosion




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-RNT-10/55/2	2	80x145	M10	55	5	30	5906675094649
R-S1-RNT-12/80/1	1	80x145	M12	80	5	30	5906675094656
R-S1-RNT-4/12/10	10	80x145	M4	12	5	30	5906675094663
R-S1-RNT-4/24/8	8	80x145	M4	24	5	30	5906675094670
R-S1-RNT-5/25/6	6	80x145	M5	26	5	30	5906675094687
R-S1-RNT-5/38/6	6	80x145	M5	38	5	30	5906675094694
R-S1-RNT-6/27/4	4	80x145	M6	27	5	30	5906675094700
R-S1-RNT-6/35/4	4	80x145	M6	35	5	30	5906675094717
R-S1-RNT-8/30/4	4	80x145	M8	30	5	30	5906675094724
R-S1-RNT-8/50/2	2	80x145	M8	50	5	30	5906675094731

R-RNT RAWLNUT FLEXI PLUG WITH SCREW

Easy-to-install plug giving exceptional resistance to vibration and corrosion



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-RNT-10/55+/2	2	80x145	M10	55	10x60	5	30	5906675390147
R-S1-RNT-4/24+/8	8	80x145	M4	24	4x30	5	30	5906675390109
R-S1-RNT-5/38+/6	6	80x145	M5	38	5x50	5	30	5906675390116
R-S1-RNT-6/35+/4	4	80x145	M6	35	6x50	5	30	5906675390123
R-S1-RNT-8/50+/2	2	80x145	M8	50	8x60	5	30	5906675390130



R-ISO-PLUG INSULATION FIXINGS

For fastening lightweight fixtures on insulated facades



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-ISOPLUG50/4	4	95x165	28	55	5	25	5906675094038
R-S1-ISOPLUG80/4	4	95x220	28	85	5	20	5906675094045

R-KEM II STYRENE FREE POLYESTER RESIN

Universal polyester styrene free resin. Suitable for use in non-cracked concrete and wide range of solid or hollow masonry structures ETA for 15 substrates




Rawplug code	Quantity [ml]	Set Contents		Packaging size [mm]	Quantity [pcs]		Bar Code
		Name	Quantity		Set	Outer	
R-KEMII-175-SET	175	Nozzle	2	95x220	1	5	5906675057866
		Wire mesh sleeves 12x50 mm	4				
		R-STUDS 8x110 mm	4				
R-KEMII-300-SET	300	Nozzle	2	95x165	1	5	5906675057859
		Wire mesh sleeves 16x85 mm	4				
		R-STUDS 10x130 mm	4				
R-S1-NOZ-KEM/5	5 pcs	Mixer to R-KEMII	5	145x290	1	10	5906675463568
R-S1-NOZ-KER/5	5 pcs	Mixer to R-KERII	5	145x290	1	10	5906675463575

PLASTIC MESH SLEEVES

The sleeve for reduced mortar consumption and optimal mechanical interlock




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-PLS-12050/6	6	145x220	12	50	5	10	5906675094090
R-S1-PLS-15085/6	6	145x220	16	85	5	10	5906675094106
R-S1-PLS-15125/6	6	145x220	16	130	5	5	5906675094113
R-S1-PLS-20085/6	6	145x220	20	85	5	5	5010445606168




R-STUDS METRIC THREADED RODS

Threaded rod with hexagonal head made of carbon steel class 5.8 for use with bonded anchors

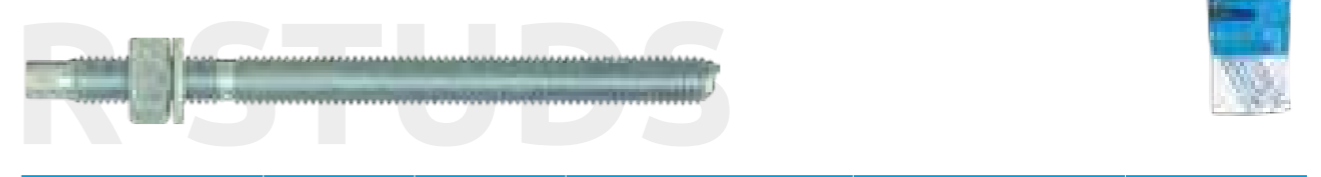

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-STUDS08110/5	5	95x220	8	110	5	20	5010445604492
R-S1-STUDS10130/5	5	145x220	10	130	5	10	5010445604539
R-S1-STUDS12160/5	5	145x290	12	160	5	5	5010445604614



R-DRA NYLON SELF DRILL FIXING FOR PLASTERBOARD WITH SCREW

Nylon self-drilling light-duty nylon fixing for use in plasterboard sheets and gypsum fibreboards



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-DRA01/12	12	095X165	14	22	3.9x32	10	30	5010445070150
R-S1-DRA01/25	25	095X220	14	22	3.9x32	5	15	5010445070228
R-S1-DRA01/6	6	080-145	14	22	3.9x32	5	30	5010445070051

R-DRAM METAL SELF DRILL FIXING FOR PLASTERBOARD WITH SCREW

A self-drilling light-duty metal fixing for use in plasterboard sheets



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-DRA02/6	6	80x145	13	31	4.5x34	5	30	5010445071058
R-S1-DRA02/12	12	95x165	13	31	4.5x34	5	25	5010445071157
R-S1-DRA02/25	25	95x165	13	31	4.5x34	5	25	5010445071225
R-S1-DRA02/50	50	145x220	13	31	4.5x34	5	10	5010445071249
R-S1-DRA02/100	100	145x290	13	31	4.5x34	5	5	5010445071324

PLASTERBOARD P

METAL & NYLON SELF DRILL FIXING FOR PLASTERBOARD


Metal & Nylon self-drilling light-duty nylon fixing for use in plasterboard sheets and gypsum fibreboards



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-DRA01/02MIX	10; 10	95x165	13, 14	31, 22	5	25	5906675093338

METAL & NYLON SELF DRILL FIXING WITH SCREW FOR PLASTERBOARD

A self-drilling light-duty metal fixing for use in plasterboard sheets

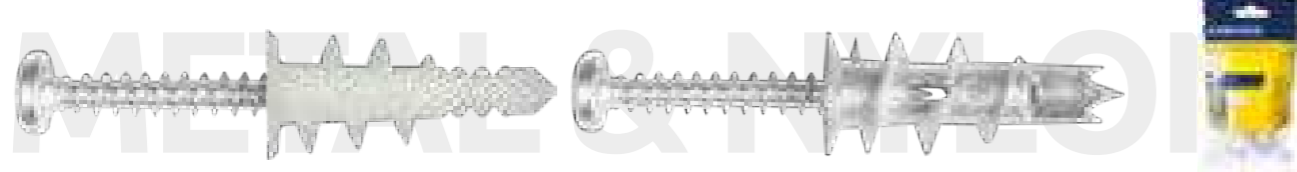

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-DRA01/02MIX+	8; 8	95x165	14	22	3.9x32	5	25	5906675093345

R-SM INTERSET HOLLOW WALL ANCHOR

Interaset fixing for permanent anchorages in cavity walls. Zinc-plated metal fixing with metric screw



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-SM04020/10	10	95x165	M4	20	5	25	5010445416033
R-S1-SM04020/6	6	80x145	M4	20	5	30	5010445416057
R-S1-SM04032/10	10	95x165	M4	32	5	25	5906675094755
R-S1-SM04032/6	6	80x145	M4	32	5	30	5906675094779
R-S1-SM04038/10	10	95x165	M4	38	5	25	5010445416194
R-S1-SM04038/20	20	95x165	M4	38	5	25	5010445416279
R-S1-SM04038/6	6	80x145	M4	38	10	30	5010445416255
R-S1-SM04046/20	20	95x220	M4	46	5	15	5906675094823
R-S1-SM04046/6	6	80x145	M4	46	5	30	5906675094830
R-S1-SM05037/10	10	95x165	M5	37	5	25	5010445416354
R-S1-SM05037/20	20	95x220	M5	37	5	15	5010445416378
R-S1-SM05037/6	6	80x145	M5	37	5	30	5010445416453
R-S1-SM05052/20	20	95x220	M5	52	5	15	5010445003769
R-S1-SM05052/6	6	80x145	M5	52	5	30	5906675094854

PLASTERBOARD P

R-SM INTERSET HOLLOW WALL ANCHOR (cont.)

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-SM05065/20	20	145x220	M5	65	5	10	5010445416576
R-S1-SM05065/6	6	80x145	M5	65	5	30	5906675064277
R-S1-SM06037/20	20	95x220	M6	37	5	15	5010445003776
R-S1-SM06037/6	6	80x145	M6	37	5	30	5906675094885
R-S1-SM06052/20	20	145x220	M6	52	5	10	5010445003783
R-S1-SM06052/6	6	80x145	M6	52	5	30	5906675094908
R-S1-SM06065/20	20	145x220	M6	65	5	10	5010445416675
R-S1-SM06065/4	4	80x145	M6	65	5	30	5906675094922
R-S1-SM04032K/6	6	80x145	M4 (angle hook)	32	5	30	5906675094786
R-S1-SM04032S/6	6	80x145	M4 (round hook)	32	5	30	5906675094793

R-GPB TAP-IT HAMMER IN FIXING FOR PLASTERBOARD WITH SCREW

Spring toggle single or double thickness plasterboard and large fixtures



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-GPB/12	12	95x165	10.5	30	4.0x40	5	25	5906675292632
R-S1-GPB/25	25	95x165	10.5	30	4.0x40	5	25	5906675292649

R-SPO SPRING TOGGLE

Spring toggle single or double thickness plasterboard and large fixtures



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-SPO3050/6	6	095X165	M3	50	50	5	25	5010445943652
R-S1-SPO5050/20	20	145X220	M5	50	50	5	10	5906675265841
R-S1-SPO5050/6	6	095X165	M5	50	50	5	25	5010445943690
R-S1-SPO5080/20	20	145X220	M5	80	80	5	10	5906675265858
R-S1-SPO5080/6	6	095X165	M5	80	80	5	25	5010445943713
R-S1-SPO6080/20	20	145X220	M6	80	80	5	10	5906675265865
R-S1-SPO6080/6	6	095X165	M6	80	80	5	25	5906675094939

SOLID WALLS S

R-XPT THROUGHBOLT

Throughbolt for non-cracked concrete



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Steel	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-S1-XPT08075/8	8	95x220	M8	75		5	20	5906675064109
R-S1-XPT08095/4	4	80x145	M8	95		5	30	5906675095820
R-S1-XPT08095/8	8	95x220	M8	95		5	20	5906675095837
R-S1-XPT08115/4	4	95x220	M8	115		5	20	5906675095844
R-S1-XPT08140/4	4	95x220	M8	140		5	20	5906675095851
R-S1-XPT10065/6	6	95x165	M10	65		5	25	5906675095868
R-S1-XPT10080/4	4	95x165	M10	80		5	25	5906675095882
R-S1-XPT10080/6	6	145x220	M10	80		5	10	5906675064116
R-S1-XPT10095/4	4	95x165	M10	95		5	25	5906675095899
R-S1-XPT10115/4	4	95x220	M10	115		5	20	5906675095912
R-S1-XPT10140/4	4	95x220	M10	140		5	20	5906675095929
R-S1-XPT12100/2	2	95x165	M12	100		5	25	5906675095936
R-S1-XPT12100/4	4	95x220	M12	100		5	20	5906675064130
R-S1-XPT12125/2	2	95x220	M12	125		5	20	5906675095943
R-S1-XPT16105/2	2	95x220	M16	105		5	20	5906675321363
R-S1-XPT-A408075/4	4	80x145	M8	75	A4	5	30	5906675096001
R-S1-XPT-A408075/6	6	95x165	M8	75	A4	5	25	5906675096018
R-S1-XPT-A408115/4	6	95x220	M8	115	A4	5	20	5906675096049
R-S1-XPT-A410065/4	4	95x165	M10	65	A4	5	25	5906675096056
R-S1-XPT-A410080/4	4	95x165	M10	80	A4	5	25	5906675096063
R-S1-XPT-A410095/4	4	95x165	M10	95	A4	5	25	5906675096070
R-S1-XPT-A410095/6	6	95x220	M10	95	A4	5	20	5906675096087
R-S1-XPT-A410140/4	4	95x220	M10	140	A4	5	20	5906675096094
R-S1-XPT-A412100/4	4	95x220	M12	100	A4	5	20	5906675096117

R-RBL RAWLBOLT LOOSEBOLT

World's most popular all-purpose expanding shield anchor - loose bolt version




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Max thickness of the fixture (t _{fix})	Box	Outer	
R-S1-RBL-08E/2	2	95x165	M8		5	25	5906675094199
R-S1-RBL-08H/2	2	95x165	M8		5	25	5906675094212
R-S1-RBL-10E/4	4	95x220	M10		5	20	5906675399621
R-S1-RBL-12E/2	2	95x220	M12		5	20	5906675094243
R-S1-RBL-M6/10/5	5	95x165	M6	10	5	25	5906675094366
R-S1-RBL-M8/10/5	5	95x165	M8	10	5	25	5906675094427
R-S1-RBL-M8/25/5	5	95x165	M8	25	5	25	5906675094458
R-S1-RBL-M10/10/5	5	95x220	M10	10	5	20	5906675094267
R-S1-RBL-M10/25/5	5	95x220	M10	25	5	15	5906675094298
R-S1-RBL-M10/50/5	5	145x220	M10	50	5	10	5906675094304
R-S1-RBL-M10/75/5	5	145x290	M10	75	5	5	5906675094311
R-S1-RBL-M12/10/5	5	145x220	M12	10	5	10	5906675094328
R-S1-RBL-M16/15/2	2	145x220	M16	15	5	10	5906675445793
R-S1-RBL-M16/30/2	2	145x290	M16	30	5	5	5906675445809

SOLID WALLS S

R-RBP RAWLBOLT - BOLT PROJECTING

World's most popular all-purpose expanding shield anchor - bolt projecting version

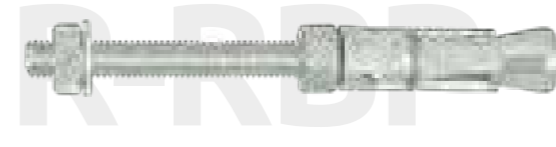

Rawplug code	Quantity in pack	Packaging size [mm]	Product		Quantity		Bar Code
			Diameter	Max thickness of the fixture (t _{fix})	Box	Outer	
R-S1-RBP-M8/25/5	5	95x165	M8	25	5	25	5906675094618
R-S1-RBP-M8/60/5	5	95x220	M8	60	5	20	5906675094632
R-S1-RBP-M10/60/5	5	145x220	M10	60	5	10	5906675094519
R-S1-RBP-M12/15/5	5	145x220	M12	15	5	10	5906675332512
R-S1-RBP-M12/30/5	5	145x220	M12	30	5	10	5906675094533
R-S1-RBP-M12/75/5	5	145x290	M12	75	5	5	5906675094557

R-FX-N-L NYLON HAMMER-IN FIXING WITH COUNTERSUNK HEAD

The nylon hammer fixing with countersunk head for fast, simple, cost-effective installations



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-FX-N06L040/10	10	080-145	6	40	5	30	5906675093871
R-S1-FX-N06L040/16	16	095X165	6	40	5	25	5906675064178
R-S1-FX-N06L040/30	30	095X220	6	40	5	20	5906675399553
R-S1-FX-N06L060/10	10	080-145	6	60	5	30	5010445214608
R-S1-FX-N06L060/20	20	095X220	6	60	5	20	5010445215520
R-S1-FX-N06L060-12	12	080-145	6	60	5	30	5906675071411
R-S1-FX-N06L080/10	10	095X165	6	80	5	25	5906675093895
R-S1-FX-N08L060/10	10	095X165	8	60	5	25	5906675093901
R-S1-FX-N08L060/20	20	095X220	8	60	5	15	5906675093918
R-S1-FX-N08L080/10	10	095X220	8	80	5	25	5010445214707
R-S1-FX-N08L080/20	20	145X220	8	80	5	10	5010445215544
R-S1-FX-N08L080-12	12	095X220	8	80	5	20	5906675071435
R-S1-FX-N08L100/10	10	095X220	8	100	5	20	5010445214806
R-S1-FX-N08L100/20	20	145X220	8	100	5	10	5010445215568
R-S1-FX-N08L100-12	12	095X220	8	100	5	20	5906675071442
R-S1-FX-N08L120/10	10	095X220	8	120	5	20	5010445214905
R-S1-FX-N08L120/20	20	145X290	8	120	5	5	5010445215582
R-S1-FX-N08L140/6	6	095X220	8	140	5	20	5906675093932
R-S1-FX-N08L160/6	6	095X220	8	160	5	20	5906675093949

R-FX-N-K NYLON HAMMER-IN FIXING WITH MUSHROOM HEAD

The nylon hammer fixing with mushroom head for fast, simple, cost-effective installations




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-FX-N06K040/20	20	095X165	6	40	5	25	5906675093833
R-S1-FX-N06K060/20	20	095X220	6	60	5	20	5906675093864

SOLID WALLS S

R-FX-N-C NYLON HAMMER-IN FIXING WITH CYLINDER HEAD

The nylon hammer fixing with cylinder head for fast, simple, cost-effective installations

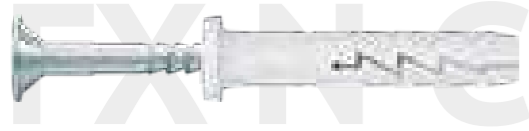

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-FX-N06C040/20	20	095X165	6	40	5	25	5906675093802

R-LX CONCRETE SCREW ANCHOR

Self-tapping concrete screwbolt



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-S1-LXC06075Z/10	10	95x165	7.5	75	5	25	5906675230269
R-S1-LXC08090Z/10	10	145x220	10	90	5	10	5906675292816
R-S1-LXC10085Z/10	10	145x220	12.5	85	5	10	5906675292823
R-S1-LXH08075Z/10	10	95x220	10	75	5	20	5906675230245
R-S1-LXH08090Z/10	10	145x220	10	75	5	10	5010445007019
R-S1-LXH10085Z/10	10	145x220	12.5	185	5	10	5010445007026
R-S1-LXH10120Z/10	10	145x290	12.5	120	5	5	5906675091266
R-S1-LXHF05050Z/8	8	95x165	6.3	50	5	25	5906675292670
R-S1-LXHF06035Z/10	10	95x165	7.5	35	5	25	5906675402321
R-S1-LXHF06040Z/8	8	95x165	7.5	40	5	25	5906675402338
R-S1-LXHF06050Z/6	6	95x165	7.5	50	5	25	5906675292687
R-S1-LXHF06075Z/10	10	95x165	7.5	75	5	25	5906675230276
R-S1-LXHF06075Z/6	6	95x165	7.5	75	5	25	5906675292694
R-S1-LXHF08075Z/4	4	95x165	10	75	5	25	5906675292700
R-S1-LXHF08090Z/10	10	145x220	10	90	5	10	5906675329154
R-S1-LXHF08090Z/2	2	95x165	10	90	5	25	5906675393179
R-S1-LXHF08100Z/2	2	95x165	10	100	10	25	5906675312088
R-S1-LXHF10065Z/4	4	95x165	12.5	65	5	25	5906675292717
R-S1-LXHF10075Z/2	2	95x165	12.5	75	5	25	5906675393186
R-S1-LXHF10075Z/4	4	95x165	12.5	75	5	25	5906675310435
R-S1-LXHF10085Z/10	10	145x220	12.5	85	5	10	5906675329147
R-S1-LXHF10085Z/2	2	95x165	12.5	85	5	25	5906675292724
R-S1-LXHF10100Z/4	4	95x220	12.5	100	5	20	5906675292731
R-S1-LXHF10140Z/10	10	145x220	12.5	140	5	10	5906675329161
R-S1-LXHF14080Z/2	2	95x220	17	80	5	20	5906675402345

UNIVERSAL U

4 ALL SETS



Rawplug code	Description	Quantity [m]	Packaging size [mm]	Set Contents		Box	Outerbox	Bar Code
				Name	Quantity [pcs]			
R-T1-4ALLMIX-01	Rawplug Set of 4ALL universal nylon plugs [pack of 244]	244	250x186x52	4ALL-05	60	8	8	5906675439402
				4ALL-06	60			
				4ALL-06050	40			
				4ALL-08	40			
				4ALL-0065	20			
R-T1-4ALLMIX-01+	Rawplug Set of 4ALL universal nylon plugs with screws [pack of 340]	340	250x186x52	4ALL-05 + Screw	50 + 50	8	8	5906675439419
				4ALL-06 + Screw	60 + 60			
				4ALL-08 + Scerw	40 + 40			
				4ALL-10	24			
				4ALL-10 + Screw	20 + 20			

UNO SETS



Rawplug code	Description	Quantity [m]	Packaging size [mm]	Set Contents		Box	Outerbox	Bar Code
				Name	Quantity [pcs]			
R-T1-UNOMIX-01+	Rawplug Set of UNO plugs with screws [pack of 360]	360	250x186x52	UNO-05 + Screw	40 + 40	8	8	5906675439440
				UNO-06 + Screw	60 + 60			
				UNO-08 + Screw	50 + 50			
				UNO-10 + Screw	30 + 30			
				UNO-05 + Screw	40 + 40			
R-T1-UNOMIX-02+	Rawplug Set of UNO plugs with screws and bits [pack of 362]	362	250x186x52	UNO-06 + Screw	60 + 60	8	8	5906675439457
				UNO-08 + Screw	50 + 50			
				UNO-10 + Screw	30 + 30			
				P22/25	1			
				P23/25	1			

SET OF PLUGS FOR PLASTERBOARD



Rawplug code	Description	Quantity [m]	Packaging size [mm]	Set Contents		Box	Outerbox	Bar Code
				Name	Quantity [pcs]			
R-T1-KIT-PL-01	Rawplug Set of plugs for plasterboard [pack of 232]	212	250x186x52	SM-04038	20	8	8	5906675439433
				SM-04032K	6			
				SM-04032S	6			
				TOGLER-10 + Screw	10 + 10			
				DRA02 + Screw 4,5x34	20 + 10			
				DRA01 + Screw3932	20 + 20			
				UNO-06 + Screw	30 + 30			
				4ALL-08 + Screw	20 + 20			

R-SM INTERSET SETS



R- SM INTERSET SETS (cont.)

Rawplug code	Description	Quantity [m]	Packaging size [mm]	Set Contents		Box	Outerbox	Bar Code
				Name	Quantity [pcs]			
R-T1-SMKIT-01	Rawplug Interiset [pack of 112]	112	250x186x52	SM-04032	20	8	8	5906675439464
				SM-04032K	6			
				SM-04032S	6			
				SM-04038	20			
				SM-05057	20			
				SM-05052	12			
				SM-06037	16			
				SM-06052	12			



TIMBER T

R-PTX

Construction screw with countersunk head and partial thread




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]			Quantity [pcs]	
			Diameter	Length	Length L1	Box	Outer
R-S1-PTX-30016	50	80x145	3	16	10	5	30
R-S1-PTX-30020	48	80x145	3	20	12	5	30
R-S1-PTX-30025	42	80x145	3	25	15	5	30
R-S1-PTX-30030	40	80x145	3	30	17	5	30
R-S1-PTX-30035	34	80x145	3	35	21	5	30
R-S1-PTX-35016	46	80x145	3.5	16	16	5	30
R-S1-PTX-35020	40	80x145	3.5	20	12	5	30
R-S1-PTX-35025	40	80x145	3.5	25	15	5	30
R-S1-PTX-35030	34	80x145	3.5	30	17	5	30
R-S1-PTX-35035	30	80x145	3.5	35	21	5	30
R-S1-PTX-35040	30	80x145	3.5	40	24	5	30
R-S1-PTX-35045	26	80x145	3.5	45	25	5	30
R-S1-PTX-35050	24	80x145	3.5	50	30	5	30
R-S1-PTX-40030	28	80x145	4	30	17	5	30
R-S1-PTX-40035	26	80x145	4	35	21	5	30
R-S1-PTX-40040	24	80x145	4	40	25	5	30
R-S1-PTX-40045	22	80x145	4	45	25	5	30
R-S1-PTX-40050	18	80x145	4	50	30	5	30
R-S1-PTX-40060	16	80x145	4	60	35	5	30
R-S1-PTX-40070	14	80x145	4	70	40	5	30
R-S1-PTX-45035	22	80x145	4.5	35	19	5	30
R-S1-PTX-45040	20	80x145	4.5	40	25	5	30
R-S1-PTX-45045	18	80x145	4.5	45	25	5	30
R-S1-PTX-45050	16	80x145	4.5	50	30	5	30
R-S1-PTX-45060	14	80x145	4.5	60	35	5	30
R-S1-PTX-45070	12	80x145	4.5	70	40	5	30
R-S1-PTX-45080	10	80x145	4.5	80	50	5	30
R-S1-PTX-50035	18	80x145	5	35	19	5	30
R-S1-PTX-50040	14	80x145	5	40	25	5	30
R-S1-PTX-50045	13	80x145	5	45	25	5	30
R-S1-PTX-50050	12	80x145	5	50	30	5	30
R-S1-PTX-50055	11	80x145	5	55	35	5	30
R-S1-PTX-50060	10	80x145	5	60	35	5	30
R-S1-PTX-50070	9	80x145	5	70	40	5	30
R-S1-PTX-50080	8	80x145	5	80	50	5	30
R-S1-PTX-50090	7	80x145	5	90	50	5	30
R-S1-PTX-50100	6	80x145	5	100	60	5	30
R-S1-PTX-50120	4	95x165	5	120	60	5	25
R-S1-PTX-60060	7	80x145	6	60	35	5	30
R-S1-PTX-60070	6	80x145	6	70	40	5	30
R-S1-PTX-60080	5	80x145	6	80	50	5	30
R-S1-PTX-60090	5	80x145	6	90	50	5	30
R-S1-PTX-60100	4	80x145	6	100	60	5	30
R-S1-PTX-60110	4	95x165	6	110	60	5	25
R-S1-PTX-60120	4	95x165	6	120	60	5	25



B-PACK S	B-PACK M	B-PACK L	B-PACK XL
(mm)	(mm)	(mm)	(mm)
H 185 x W 110 x D 65	H 265 x W 160 x D 80	H 310 x W 210 x D 110	H 350 x W 300 x D 160
0,5kg	1kg	1,5kg	2kg

”B-PACK PACKAGING



UNIVERSAL U

UNO UNIVERSAL PLUG

Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-PDM-UNOBR/300	300	160x265x80	7	30	5	5	5906675393933
R-PDM-UNORED/300	300	160x265x80	6	28	5	5	5906675393926
R-PDXL-UNOYRB	200;300;300	300x160x350	5x24; 6x28; 7x30		4	4	

UNO UNIVERSAL PLUG WITH SCREW

Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-PDL-UNOBB+	200;150	210x310x110	7x30; 8x32		4.5x40 5.0x45	6	6	5906675098241
R-PDL-UNOBR/350+	350	210x310x110	7	30	4.0x35	5	5	5906675393919
R-PDL-UNORED/500+	500	210x310x110	6	28	4.0x30	5	5	5906675393902
R-PDS-UNORB+	10;10	110x185x65	6x28, 7x30		4.0x35 4.5x40	16	16	5906675097985

4ALL UNIVERSAL NYLON PLUG

High performance nylon plug for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-PDL-4ALLMIX	120;80;50	210x310x110	6x30; 8x40; 10x50		6	6	5906675098135

4ALL UNIVERSAL NYLON PLUG WITH SCREW

High performance nylon plug for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-PDL-4ALLMIX+	100;60;30	210x310x110	6x30; 8x40; 10x50		4.5x40	6	6	5906675098159



PLASTERBOARD P

SELF DRILL FIXING FOR PLASTERBOARD WITH SCREW

Self-drilling light-duty nylon fixing for use in plasterboard sheets and gypsum fibreboards




Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-PDL-DRA02/200	200	210x310x110	13	31		5	5	5906675393940
R-PDL-DRAMIX+	100;100	210x310x110	13, 14	31, 22	3.9x32	6	6	5906675098197
R-PDM-DRAMIX	80;80	160x265x80	13, 14	31, 22		10	10	5906675098371
R-PDM-DRAMIX+	50;50	160x265x80	13, 14	31, 22	3.9x32	10	10	5906675098364
R-PDS-DRAMIX	20;20	110x185x65	13, 14	31, 22		16	16	5906675098005
R-PDS-DRAMIX+	16;16	110x185x65	13, 14	31, 22	3.9x32	16	16	5906675097992
R-PDXL-DRA01/800	800	300x350x160	14	22		4	4	5906675097824
R-PDL-SMDRA+	100;100	210x310x110	M4x32; 14x22		3.9x32	6	6	5906675098203

R-SM INTERSET HOLLOW WALL ANCHOR

Interaset fixing for permanent anchorages in cavity walls. Zinc-plated metal fixing with metric screw



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-PDXL-SM04032/500	500	300x160x350	M4	32	4	4	5906675097879
R-PDXL-SM05037/300	300	300x160x350	M5	37	4	4	5906675097886
R-PDXL-SM06052/200	200	300x160x350	M6	52	4	4	5906675097893



SOLID WALLS S

R-FX-N-L, R-FX-N-K NYLON HAMMER-IN FIXING

The nylon hammer fixing with countersunk head for fast, simple, cost-effective installations



FX-N-L countersunk head



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-PDM-06L040/100	100	160x265x80	6	40	10	10	5906675098388
R-PDM-06L060/100	100	160x265x80	6	60	10	10	5906675098395
R-PDXL-06L040/600	600	300x350x160	6	40	4	4	5906675097794



"B-PACK & RAWLBAG SOLUTIONS KITS

R-PDS-BAT BATHROOM ACCESSORY KIT

Small kit of fasteners suitable for fixings of sanitary accessories and appliances, i.e. sinks, toilets, shelves and bathroom furniture



Rawplug code	Quantity in pack	Packaging size [mm]	Product	Drill [mm]	Quantity		Bar Code
					Box	Outer	
R-PDS-BAT	set	110x185x65	6x28; 7x32; M5x37; 13x31 4.0x45; 5.0x50	10	16	16	5906675098036

R-PDS-CPT CURTAIN POLE KIT



Rawplug code	Quantity in pack	Packaging size [mm]	Product	Drill [mm]	Quantity		Bar Code
					Box	Outer	
R-PDS-CPT	10;1	95x165	7x30; 4.5x50	7	16	16	5906675098081

R-PDS-FSTV1 FLAT SCREEN TV KIT

Small kit of plugs with masonry drill for fixing of flat screen TV sets on hollow walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product	Drill [mm]	Quantity		Bar Code
					Box	Outer	
R-PDS-FSTV1	6	110x185x65	M5x37	10	16	16	5906675098050

R-PDS-FSTV2 FLAT SCREEN TV KIT

Small kit of frame fixings with masonry drill for fixing of flat screen TV sets on solid walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-FSTV2	6;1	110x185x65	8	100	8	16	16	5906675098067

SOLUTIONS KITS SK

R-PDS-GAR GARDEN GATE KIT

Plugs with masonry drill for fixing of home appliances on hollow and solid walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-GAR	4;1	110x185x65	10	50	10	16	16	5906675098104

R-PDS-HAN HANGING BASKET KIT

Small kit of universal UNO plugs for fixing of hollow and solid walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-HAN	6;1	110x185x65	8	32	8	16	16	5906675098043

R-PDS-MIR MIRROR FIXING KIT



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-MIR	4;1	110x185x65	6	28	6	16	16	5906675098012

R-PDS-OUTL OUTSIDE LIGHT KIT

Small kit of universal 4ALL plugs with masonry drill for fixing of medium load elements on solid walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-OUTL	4;1	110x185x65	8	40	8	16	16	5906675098074

SOLUTIONS KITS SK

R-PDS-RAD RADIATOR FIXING KIT


Small kit of screws and universal UNO plugs for fixing of home appliances on hollow and solid walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-RAD	6;6;1	110x185x65	7x30; M5x52; 4.5x50		7	16	16	5906675098098

R-PDS-SHE SHELVING KIT

Small kit of universal UNO plugs with masonry drill for fixing of shelves and cupboards on hollow and solid walls

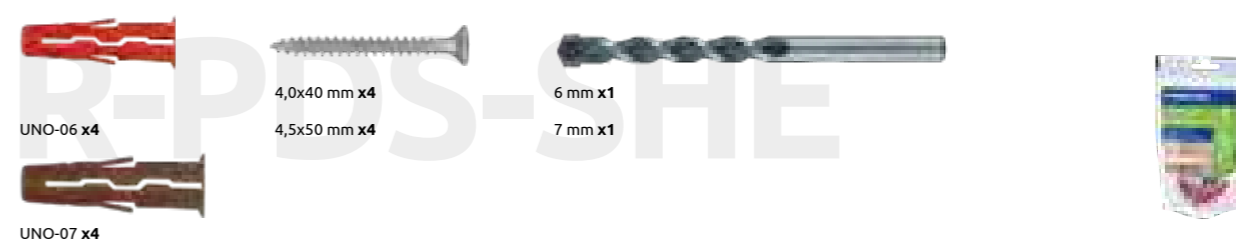

Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-PDS-SHE	4;4;1;1	110x185x65	6x28; 7x30; 4.0x40; 4.5x50		6 & 7	16	16	5906675098029

R-S1-BAC BATHROOM ACESORY KIT

Small Set of plugs for fixing of bathroom appliances on hollow and solid walls



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-S1-BAC	6;6;6;6	95x165	6x28; 7x30; M5x37; 13x31; 4.0x45; 5.0x50		6 & 7	16	16	5906675098104

R-S1-FSHWD FLAT SCREEN TV KIT



Rawplug code	Quantity in pack	Packaging size [mm]	Product		Drill [mm]	Quantity		Bar Code
			Diameter	Length		Box	Outer	
R-S1-FSHWD	6;1	95x220	8	100	8	5	20	5906675064093

SOLUTIONS KITS SK

R-S1-FSLW FLAT SCREEN TV KIT



SM M5x37 mm x6

10 mm x1



Rawplug code	Quantity in pack	Packaging size	Product		Drill	Quantity		Bar Code
		[mm]	Diameter	Length		Box	Outer	
R-S1-FSLW	6;1	95x165	M5x37	10	5	25	5906675063430	

R-S1-GAR GARDEN GATE FIXING KIT



KT-10x50 x4

10 mm x1



Rawplug code	Quantity in pack	Packaging size	Product		Drill	Quantity		Bar Code
		[mm]	Diameter	Length		Box	Outer	
R-S1-GAR	4;1	95x165	M8x50	10	5	25	5906675063416	

R-S1-MC-02 MIRROR FIXING KIT




MC-02 x4



Rawplug code	Quantity in pack	Packaging size	Product [mm]		Quantity		Bar Code
		[mm]	Diameter	Length	Box	Outer	
R-S1-MC-02	4	80x145	4	35	5	25	5906675423494

R-S1-RAD RADIATOR FIXING KIT

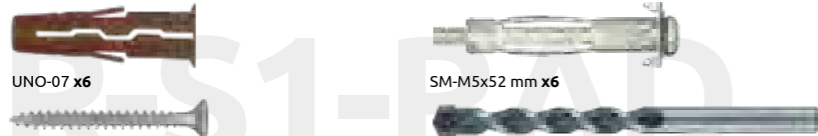

UNO-07 x6

SM-M5x52 mm x6

5.0x50 mm x6

7 mm x1



Rawplug code	Quantity in pack	Packaging size	Product		Drill	Quantity		Bar Code
		[mm]	Diameter	Length		Box	Outer	
R-S1-RAD	6; 6; 1	95x165	7x30; M5x52; 5.0x50	7	5	30	5906675063379	

R-S1-SFK SANITARY FIXING KIT

Small kit of universal UNO plugs and solid plugs for a simple Toilet installation



UNO 07 x2

4,5x60 mm x4

PMN x2

PMP x2


8,0x40 x4



Rawplug code	Quantity in pack	Packaging size	Product		Drill	Quantity		Bar Code
		[mm]	Diameter	Length		Box	Outer	
R-S1-SFK	4;2	95x165	7x30; 8x40; 4.5x60	7 & 8	5	10	5906675091334	



”JAR PACKAGING



UNIVERSAL U

UNO UNIVERSAL PLUG


Truly universal plug which fixes into any base material, solid or hollow



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-C1-UNOBLU	500	110x110x210	8	32	-	1	6	5906675399607
R-C1-UNOBRN	700	110x110x210	7	30	-	1	6	5906675399591
R-C1-UNORED	1000	110x110x210	6	28	-	1	6	5906675399584

UNO UNIVERSAL PLUG WITH SCREW

Truly universal plug which fixes into any base material, solid or hollow

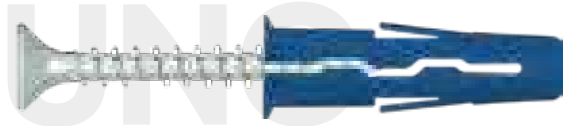

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-C1-UNOBRN+	450	110x110x210	7	30	4.0x40	1	6	5906675435244
R-C1-UNORED+	500	110x110x210	6	28	4.5x40	1	6	5906675435251
R-C1-UNOBLU+	300	110x110x210	8	32	4.5x40	1	6	5906675445380
R-C1-UNOGRY+	200	110x110x210	10	36	5.0x45	1	6	5906675445397

4ALL UNIVERSAL NYLON PLUG

High performance nylon plug for all types of substrates



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-C1-4ALL06	1000	110x110x210	6	30	1	6	5906675433110
R-C1-4ALL08	400	110x110x210	8	40	1	6	5906675432861

4ALL UNIVERSAL NYLON PLUG WITH SCREW

High performance nylon plug for all types of substrates



4ALL UNIVERSAL NYLON PLUG WITH SCREW


Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-C1-4ALL06+	500	110x110x210	6	30	4.5x40	1	6	5906675435220
R-C1-4ALL08+	200	110x110x210	8	40	5.0x60	1	6	5906675435237
R-C1-4ALL10+	100	110x110x210	10	50	6.0x60	1	6	5906675441016




PLASTERBOARD P

R-DRA SELF DRILL FIXING FOR PLASTERBOARD WITH SCREW

Self-drilling light-duty nylon fixing for use in plasterboard sheets and gypsum fibreboards

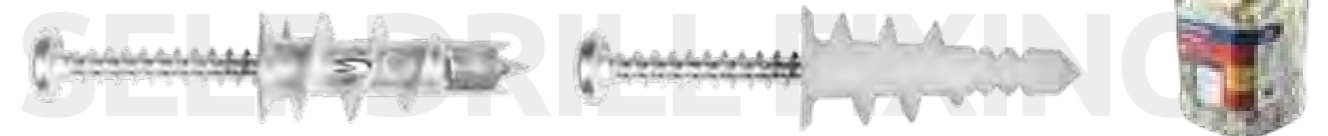

Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Screw [mm]	Quantity [pcs]		Bar Code
			Diameter	Length		Box	Outer	
R-C1-DRA01+	300	110x110x210	14	22	3.9x32	1	6	5906675399560
R-C1-DRA02+	400	110x110x210	13	31	4.5x34	1	6	5906675399577



SOLID WALLS S

R-FX-N-L NYLON HAMMER-IN FIXING WITH COUNTERSUNK HEAD


The nylon hammer fixing with countersunk head for fast, simple, cost-effective installations



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-C1-FX-N-05L030	700	110x110x210	5	30	1	6	5906675384009
R-C1-FX-N-06L040	300	110x110x210	6	40	1	6	5906675384023
R-C1-FX-N-06L060	170	110x110x210	6	60	1	6	5906675384047

R-FX-N-C NYLON HAMMER-IN FIXING WITH CYLINDER HEAD

The nylon hammer fixing with cylinder head for fast, simple, cost-effective installations



Rawplug code	Quantity in pack	Packaging size [mm]	Product [mm]		Quantity [pcs]		Bar Code
			Diameter	Length	Box	Outer	
R-C1-FX-N-05C030	700	110x110x210	5	30	1	6	5906675383996
R-C1-FX-N-06C040	300	110x110x210	6	40	1	6	5906675384016
R-C1-FX-N-06C060	170	110x110x210	6	60	1	6	5906675384030
R-C1-FX-N-08C060	130	110x110x210	8	60	1	6	5906675439211
R-C1-FX-N-08C080	100	110x110x210	8	80	1	6	5906675439235
R-C1-FX-N-08C100	70	110x110x210	8	100	1	6	5906675439242



” PACKAGING FOR LOOSE PRODUCTS



PLASTIC MESH SLEEVES


Plastic mesh sleeves for reduced mortar consumption and optimal mechanical interlock for masonry




Rawplug code	Packaging size mm	Product		Quantity		Bar Code
		Diameter mm	Sleeve mm	Box pcs	Outerbox pcs	
R-P1-PLS-12050	346x104x119	Ø 12	12x50	200	200	5906675319711
R-P1-PLS-16085-10	346x104x119	Ø 16	16x85	60	60	5906675383927
R-P1-PLS-16130-10	346x104x119	Ø 16	16x130	40	40	5906675383934
R-P1-PLS-20085	346x104x119	Ø 20	20x85	120	120	5906675319759

R-FF1 NYLON FRAME FIXING

Universal frame fixing for many applications

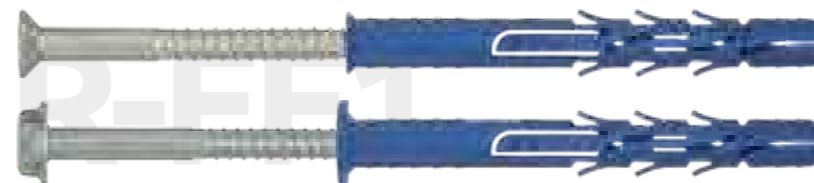

Rawplug code	Packaging size	Plug		Screw		Quantity		Bar Code
		Diameter	Length	Diameter	Length	Box	Outerbox	
		mm	mm	mm	mm	pcs	pcs	
FF1-N-K Frame fixing with collar - Zinc Plated screw, Hex head with Torx drive								
R-P1-FF1-N-10K080	346x104x119	10	80	7	89	100	100	5906675320694
R-P1-FF1-N-10K100	346x104x119	10	100	7	109	80	80	5906675320700
R-P1-FF1-N-10K120	346x104x119	10	120	7	129	80	80	5906675320717
R-P1-FF1-N-10K140	346x104x119	10	140	7	149	80	80	5906675320724
R-P1-FF1-N-10K160	346x104x119	10	160	7	169	80	80	5906675320731
R-P1-FF1-N-10K200	346x104x119	10	180	7	209	50	50	5906675320748
R-P1-FF1-N-10K240	346x104x119	10	240	7	249	50	50	5906675320755
R-P1-FF1-N-10K300	346x104x119	10	300	7	309	50	50	5906675320762
FF1-N-L Frame fixing countersunk - Zinc Plated screw, Torx head drive								
R-P1-FF1-N-10L080	346x104x119	10	80	7	87	150	150	5906675320779
R-P1-FF1-N-10L100	346x104x119	10	100	7	107	80	80	5906675320786
R-P1-FF1-N-10L120	346x104x119	10	120	7	127	120	120	5906675320793




UNIVERSAL U

R-STUDS METRIC THREADED RODS

Threaded rod with hexagonal head made of carbon steel class 5.8 for use with bonded anchors



Rawplug code	Packaging size	Anchor		Quantity [pcs]		Bar Code
		Diameter [mm]	Length [mm]	Box	Outerbox	
R-STUDS Metric Threaded Rods - Steel Class 5.8						
R-P1-STUDS-08110	346x104x119	M8	110	120	120	5906675320373
R-P1-STUDS-08160	346x104x119	M8	160	100	100	5906675320380
R-P1-STUDS-10130	346x104x119	M10	130	50	50	5906675320403
R-P1-STUDS-10170	346x104x119	M10	170	100	100	5906675320410
R-P1-STUDS-10190	346x104x119	M10	190	50	50	5906675320427
R-P1-STUDS-12160	346x104x119	M12	160	20	20	5906675320434
R-P1-STUDS-12190	346x104x119	M12	190	50	50	5906675320441
R-P1-STUDS-12220	346x104x119	M12	220	20	20	5906675320458
R-P1-STUDS-12260	346x104x119	M12	260	10	10	5906675320465
R-P1-STUDS-16190	346x104x119	M16	190	20	20	5906675320472
R-STUDS Metric Threaded Rods - Steel Class 5.8, Flat Head						
R-P1-STUDS-08160FL	346x104x119	8x160	8x160	100	100	5906675320397




SOLID WALLS S

R-RBL RAWLBOLT - LOOSE BOLT

World's most popular all-purpose expanding shield anchor - loose bolt version



Rawplug code	Packaging size	Product		Quantity [pcs]		Bar Code
		Diameter [mm]	Length [mm]	Box	Outerbox	
R-P1-RBL-M06/10W	346x104x119	M6	55	150	150	5906675320854
R-P1-RBL-M06/25W	346x104x119	M6	70	150	150	5906675320861
R-P1-RBL-M06/40W	346x104x119	M6	85	120	120	5906675320878
R-P1-RBL-M08/10W	346x104x119	M8	65	100	100	5906675320885
R-P1-RBL-M08/25W	346x104x119	M8	80	100	100	5906675320892
R-P1-RBL-M08/40W	346x104x119	M8	95	80	80	5906675320908
R-P1-RBL-M10/10W	346x104x119	M10	75	50	50	5906675320915
R-P1-RBL-M10/25W	346x104x119	M10	90	50	50	5906675320922
R-P1-RBL-M10/50W	346x104x119	M10	115	50	50	5906675320939
R-P1-RBL-M10/75W	346x104x119	M10	140	50	50	5906675320946
R-P1-RBL-M12/10W	346x104x119	M12	90	20	20	5906675320953
R-P1-RBL-M12/25W	346x104x119	M12	105	20	20	5906675320960
R-P1-RBL-M12/40W	346x104x119	M12	120	20	20	5906675320977
R-P1-RBL-M12/60W	346x104x119	M12	140	20	20	5906675320984



SOLID WALLS S

R-RBL-E RAWLBOLT - EYE BOLT

World's most popular all-purpose expanding shield anchor - eye bolt version



Rawplug code	Packaging size	Product		Quantity [pcs]		Bar Code
		Diameter [mm]	Length [mm]	Box	Outerbox	
R-P1-RBL-06EW	346x104x119	M6	73	200	200	5906675319810
R-P1-RBL-08EW	346x104x119	M8	87	200	200	5906675319841
R-P1-RBL-10EW	346x104x119	M10	108	100	100	5906675319865
R-P1-RBL-12EW	346x104x119	M12	130	50	50	5906675319889

R-RBL-H RAWLBOLT - HOOK BOLT

World's most popular all-purpose expanding shield anchor - hook bolt version



Rawplug code	Packaging size	Product		Quantity [pcs]		Bar Code
		Diameter [mm]	Length [mm]	Box	Outerbox	
R-P1-RBL-06HW	346x104x119	M6	83	200	200	5906675319834
R-P1-RBL-08HW	346x104x119	M8	98	200	200	5906675319858
R-P1-RBL-10HW	346x104x119	M10	120	100	100	5906675319872
R-P1-RBL-12HW	346x104x119	M12	145	50	50	5906675319896

R-RBP RAWLBOLT - BOLT PROJECTING


World's most popular all-purpose expanding shield anchor - bolt projecting version



Rawplug code	Packaging size	Product		Quantity [pcs]		Bar Code
		Diameter [mm]	Length [mm]	Box	Outerbox	
R-P1-RBP-M06/10W	346x104x119	M6	65	150	150	5906675319902
R-P1-RBP-M06/25W	346x104x119	M6	80	150	150	5906675319919
R-P1-RBP-M06/60W	346x104x119	M6	115	100	100	5906675319926
R-P1-RBP-M08/10W	346x104x119	M8	75	150	150	5906675319933
R-P1-RBP-M08/25W	346x104x119	M8	90	100	100	5906675319940
R-P1-RBP-M08/60W	346x104x119	M8	125	100	100	5906675319957
R-P1-RBP-M10/15W	346x104x119	M10	90	100	100	5906675319964
R-P1-RBP-M10/30W	346x104x119	M10	105	100	100	5906675319971
R-P1-RBP-M10/60W	346x104x119	M10	135	80	80	5906675319988
R-P1-RBP-M12/15W	346x104x119	M12	110	50	50	5906675319995
R-P1-RBP-M12/30W	346x104x119	M12	125	50	50	5906675320007
R-P1-RBP-M12/75W	346x104x119	M12	170	50	50	5906675320014

RAWLPLUG'S COLOUR CODE

Rawlplug's colour code is an important element of the efficient product display system. Each colour corresponds to a substrate type, making the choice of the right product easier and quicker.

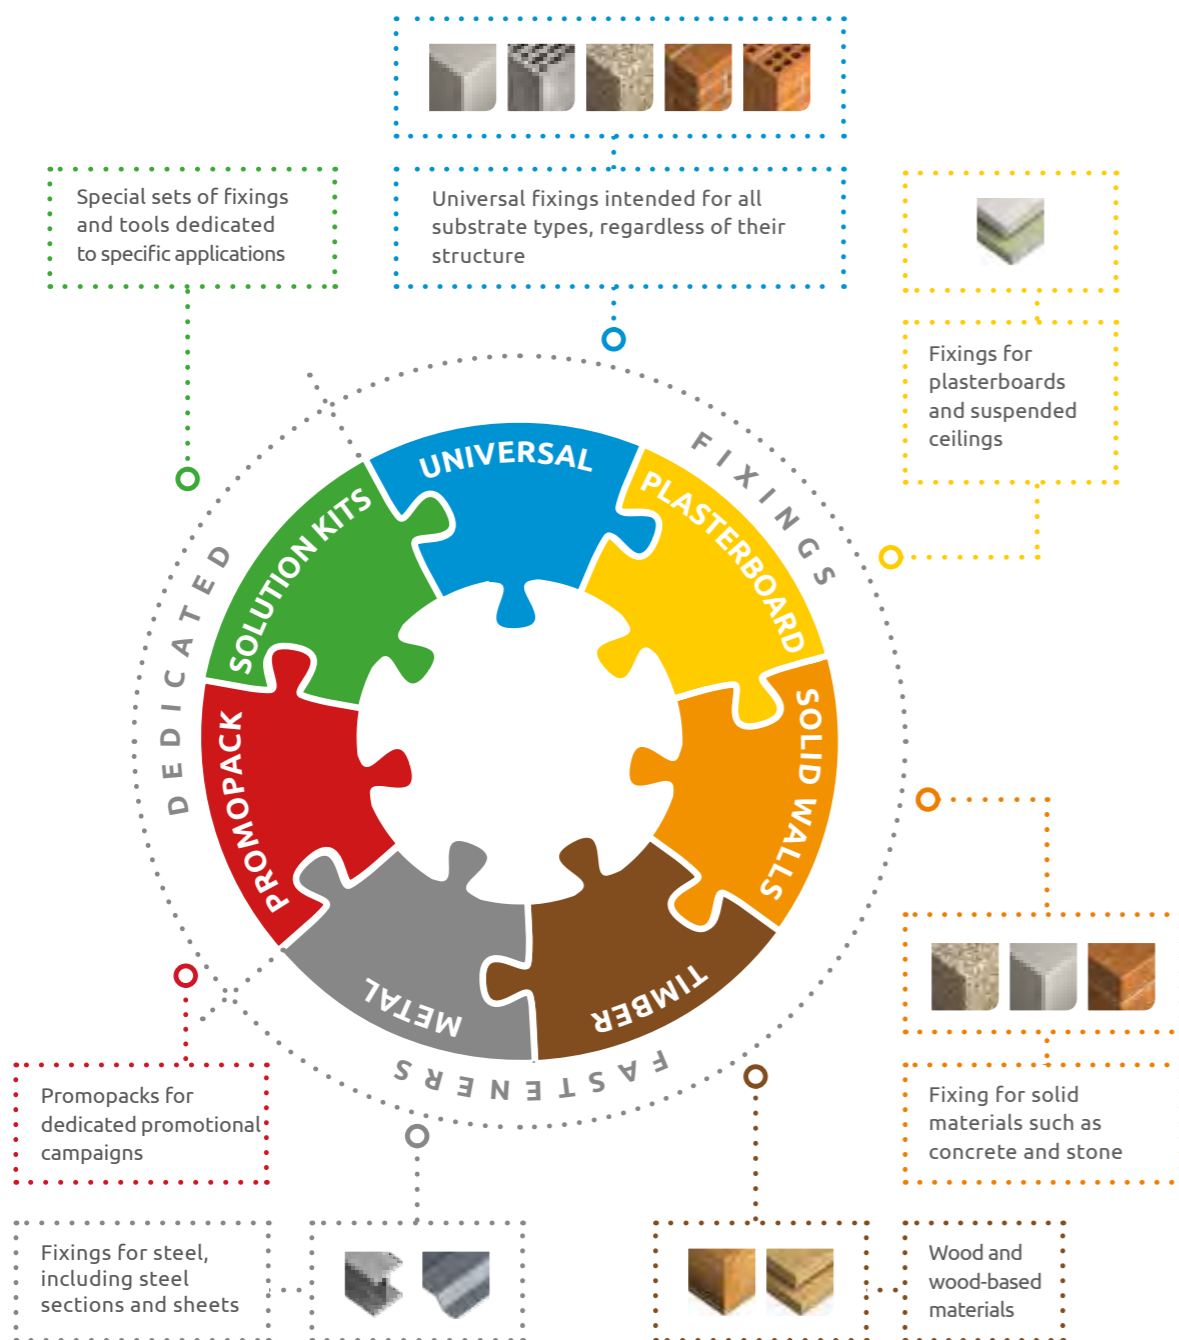

THE SUCCESS OF RAWLPLUG'S POS SYSTEM STEMS FROM THE WELL KNIT COMBINATION OF NUMEROUS ELEMENTS WHICH CUSTOMERS CONSIDER CRUCIAL, SUCH AS:

COLOUR CODE which translates into the adequate colour patterns of toppers, side panel stickers, wobblers, price strips, and floor stickers

DISPLAY RACKS WITH ACCESSORIES

POS SUPPORT TOOLS

PACKAGING AND LABELLING SYSTEM

The only way to build a long-term sales effect and trigger customer satisfaction at the point of sale is to make sure that all components of Rawlplug's POS system are used in a complementary manner.



UNIVERSAL

BLUE IS INTENDED FOR PRODUCTS WHICH CAN BE USED IN ANY KIND OF SUBSTRATE




UNO

Truly universal plug which fixes into any base material, solid or hollow



4ALL

High performance nylon plug for all types of substrates



R-FF1

Universal nylon frame fixing for many applications



R-RNT

Easy-to-install plug giving exceptional resistance to vibration and corrosion



TOP PANEL (TOPPER)

UNO + FF1

MP-S1-TBB-02-100



UNO + 4ALL

MP-S1-TBB-03-100



R-KER + R-KEMII

MP-S1-TBB-08-100



DRILL BITS & ACCESSORIES 1

MP-S1-TBB-05-100



FOAMS & SEALANTS

MP-S1-TSA-03-100



FOAMS & SEALANTS

MP-S1-TSA-01-100



SIDE LABEL

UNO

MP-S1-ND-01



4ALL

MP-S1-ND-04



FF1

MP-S1-ND-05




R-KEMII

MP-S1-NDKEMII



FOAMS

MP-S1-ND-FOAMS



STAPLER

MP-S1-NDKGR055



SHELF WOBLERS


UNO MP-S1-WUNO-01



4ALL MP-S1-W4ALLP-01



FF1 MP-S1-WFF1-01



R-KEM II MP-S1-WRKEM-01



FOAMS MP-S1-WRLOW45L-01




RT-WPH2 MP-S1-WPH2



RT-IBITT20 MP-S1-WRIBITT20



RT-KGR0031 MP-S1-WSTAP-03



RT-KGR055 MP-S1-WSTAP-04



FLOOR STICKER

UNO MP-S1-NPUNO-01



FOAM PVC MP-S1-NPLOW45L-01



BIT MP-S1-NPRTPH2



R-KEM II MP-S1-NPRKEMII-01



SHELF EDGE STRIP

UNIVERSAL MP-S1-CBB-01



PLASTERBOARD

YELLOW IS FOR PRODUCT LINES USED TO FIX IN PLASTERBOARDS AND SUSPENDED CEILING



R-DRA-01
Self-drilling light-duty nylon fixing for use in plasterboard and gypsum fibreboards




R-DRA-02
Self-drilling light-duty metal fixing for use in plasterboard sheets



R-SPO
Spring toggle for cavity walls and large fixtures with pan head metric screw



R-SM
Inter-set fixing for permanent anchorages in cavity walls



TOP PANEL (TOPPER)

R-SM + R-SM-K | MP-S1-TBR-01-100



R-DRA + R-SPO | MP-S1-TBR-02-100



R-DRA + R-SM | MP-S1-TSR-01-100



SIDE LABEL

R-DRA-01 | MP-S1-ND-08



R-SM | MP-S1-ND-02



FLOOR STICKER

R-SM | MP-S1-NPSM-01



SHELF WOBLERS

R-DRA-01 | MP-S1-WDRA-02



R-SPO | MP-S1-WSP0-01



R-SM | MP-S1-WSM-01



SHELF EDGE STRIP

PLASTERBOARD | MP-S1-CBR-01



SOLID WALLS

ORANGE IS FOR PRODUCT LINES INTENDED FOR CONCRETE SUBSTRATES



R-LX
Self-tapping zinc flake coating or zinc plated concrete screwbolt



R-HPTIIA4
Stainless steel throughbolt anchor for cracked and non-cracked concrete



R-RBL
R-RBP
World's most popular all-purpose expanding shield anchor



R-GS
Ceiling wire hanger for lightweight ceilings and suspended ceilings to solid building materials



SOLID WALLS

TOP PANEL (TOPPER)

R-XPT + R-LX MP-S1-TBO-04-100




R-RBP + R-XPT MP-S1-TBO-03-100



SIDE LABEL

R-LX MP-S1-ND-07

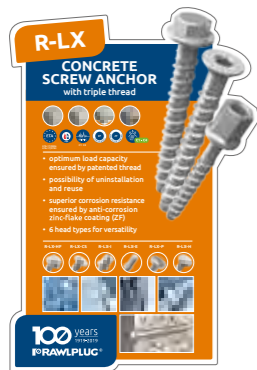

R-XPT MP-S1-ND-06




R-FX MP-S1-ND-09



AGGRESSOR SDS MAX MP-S1-NDRTMAXA



AGGRESSOR SDS PLUS MP-S1-NDRTSDSA



REBARDRILL SDS PLUS MP-S1-NDRTSDSR



SHELF WOBLERS

R-LX MP-S1-WRLX-01



R-XPT MP-S1-WXPT-01




R-FX MP-S1-WFX-01



DUSTLESSDRILL SDS MAX MP-S1-WMAXH-01



REBARDRILL SDS PLUS MP-S1-WSDSR-01



FLOOR STICKER

R-LX MP-S1-NPRLX-01



R-FX MP-S1-NPFX-01



AGGRESSOR SDS MAX MP-S1-NPRTMAXA-01



RT-DDA MP-S1-NPRTDDA



SHELF EDGE STRIP

SOLID WALLS MP-S1-CBO-01



R-SC40II DEDICATED SET OF POS



STAND SC40II MZR-43-SP
POS SET MP-S1-SET-SC40IIL

MP-S1-SET-SC40IIL SET OF POS FOR LARGE RAWLPLUG STAND (MZR-43-SP)

TOPPER



MP-S1-SET-SC40IIL INCLUDES:
 TOPER SC40II
 BACK PANEL R-SC40II
 SIDE PANNELS R-WW90II 2X
 WOBBLERS 6X
 SHELF EDGE STRIP L LARGE 5X



LEFT SIDE PANEL



RIGHT SIDE PANEL



SHELF EDGE STRIP



WOBBLERS



SIDE LABEL
MP-S1-NDCLIPSC40II



SIDE LABEL
MP-S1-NDSETSC40II



SIDE LABEL
MP-S1-NDFIXSC40II



HANGER SC40II
MP-S1-HSC40II



FLOOR STICKER
MP-S1-NPSC40II




HOOK FOR SC40II
MZR-74-SP





TIMBER


BROWN MARKS THE PRODUCT LINES INTENDED FOR FIXING IN WOOD AND TIMBER




- 

R-PTX
Construction screw with countersunk head and TX drive
- 

R-PTK
Construction screw with wafer head and partial thread
- 

R-PVS
Construction screw with countersunk head and full thread
- 

R-PVZ
Construction screw with cylinder head and full thread
- 

R-PCZ
Construction screw with cylinder head and double thread


TOP PANEL (TOPPER)



R-PTX + R-PTK

INDEX	MP-S1-TBBR-01-100
SIZE (mm)	947 x 356

SHELF EDGE STRIP



TIMBER

INDEX	MP-S1-CSBR-01
SIZE (mm)	550 x 35

INDEX	MP-S1-CSBR-01
SIZE (mm)	947 x 35

SIDE LABEL



R-PTX

INDEX	MP-S1-NDPTX
SIZE (mm)	270 x 375



R-PTK

INDEX	MP-S1-NDPTK
SIZE (mm)	270 x 365

SHELF WOBLERS



R-PTX

INDEX	MP-S1-WPTX
SIZE (mm)	140 x 150



R-PTK

INDEX	MP-S1-WPTK
SIZE (mm)	140 x 150



R-JSB


INDEX	MP-S1-WJSB
SIZE (mm)	140 x 150

FLOOR STICKER



R-PTX

INDEX	MP-S1-NPPTX
SIZE (mm)	480 x 480



R-PTK

INDEX	MP-S1-NPPTK
SIZE (mm)	480 x 480



RT-JSB

INDEX	MP-S1-NPRTJSB
SIZE (mm)	480 x 480

R-WW90II DEDICATED SET OF POS



STAND WW90II MZR-43-SP
POS SET MP-S1-SET-WW90IIL

MP-S1-SET-WW90IIL SET OF POS FOR LARGE RAWLPLUG STAND (MZR-43-SP)

TOPPER



MP-S1-SET-WW90IIL INCLUDES:

- TOPER R-WW90II
- BACK PANEL R-WW90II
- SIDE PANNELS R-WW90II 2X
- WOBBLERS 3X
- SHELF EDGE STRIP LARGE 8X

BACK



LEFT SIDE PANEL



RIGHT SIDE PANEL



SHELF EDGE STRIP



WOBBLERS



HANGER 77 cm x 54 cm
MP-S1-HWW90II



SIDE LABEL
MP-S1-NDWW90II



SIDE LABEL
MP-S1-NDWW90II_2



FLOOR STICKER
MP-S1-NPWW90II



HOOK FOR SC40II/WW90
MZR-74-SP



MIX OF SUBSTRATES

COLOUR MIX


IS A SOLUTION RECOMMENDED FOR DISPLAY OF PRODUCTS INTENDED FOR FIXING IN DIVERSE SUBSTRATES.

THE COLOUR MIX SOLUTION IS PERFECTLY TAILORED FOR POINT OF SALE OF SMALLER DISPLAY AREA.



TOP PANEL (TOPPER)

MIX MP-S1-TMIX-01-100



SIDE LABEL

MULTI 01 MP-S1-NU-01
MULTI 02 MP-S1-NU-02



MULTI 03 MP-S1-NU-03



SIDE PANEL

ORANGE-YELLOW MP-S1-B-O/Y
YELLOW - BLUE MP-S1-B-Y/B



HOLDER FOR SIDE PANELS

MZR-54-SP



PROMOPACK

RED IS USED TO DISPLAY SALES PROMOTIONS AND SPECIAL OFFERS



TOP PANEL (TOPPER)

SPECIAL OFFER MP-S1-TOS-01-100



SHELF WOBLERS

WOBLERPROMO-01 MP-S1-WPROMO-01



WOBLERPROMO-02 MP-S1-WPROMO-02




SHELF EDGE STRIP

PROMOPACK MP-S1-CPO-01




DISPLAY RACKS FROM RAWLPLUG

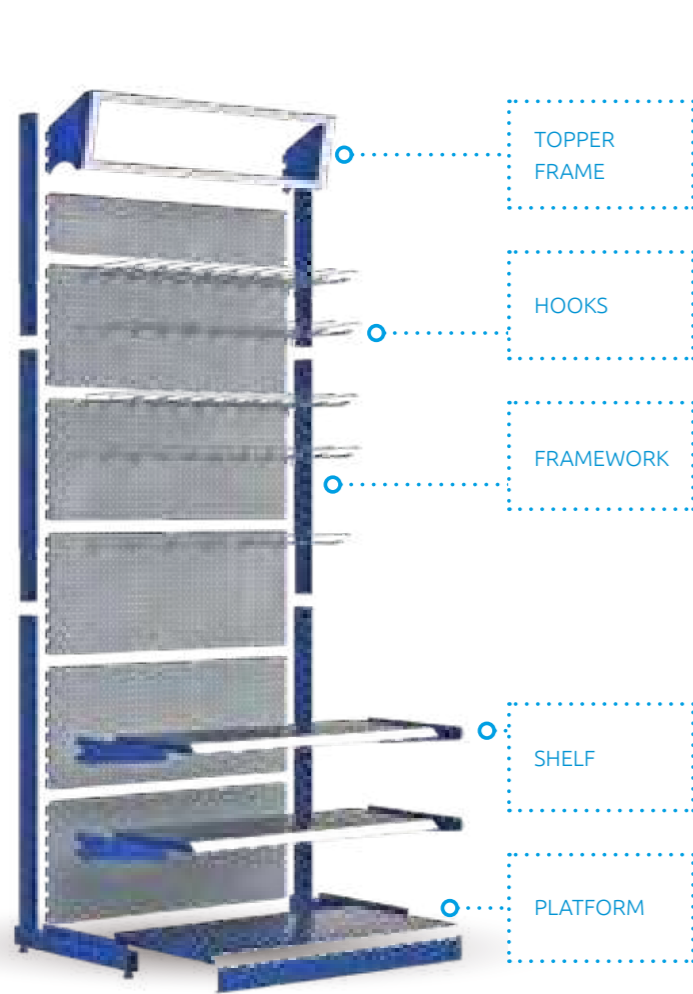

LARGE STAND

INDEX	MZR-43-SP
SIZE (mm)	990 x 2270 x 570
BAR CODE	5906675114705


COMPONENTS	Topper Frame Framework Perforation Platform Adjustable Feet
------------	---

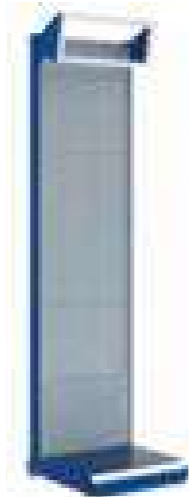

SMALL STAND

INDEX	MZR-45-SP
SIZE (mm)	610 x 2270 x 570
BAR CODE	5906675114729

COMPONENTS	Topper Frame Framework Perforation Platform Adjustable Feet
------------	---

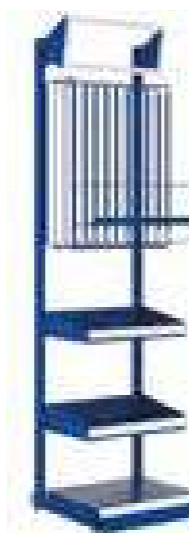

SMALL STAND FOR SEALANTS & ADHESIVES

INDEX	MZR-40-SP
SIZE (mm)	565 x 810 x 460
BAR CODE	5907776931505

COMPONENTS	Topper Frame Framework Cage for Tubes Platform
------------	---

RAWLPLUG®

DOUBLE-SIDED PANEL

INDEX	MP-S3-B-01
SIZE (mm)	300 x 1200
BAR CODE	5906675217635



TUBES HOLDER

INDEX	MZR-42-SP
SIZE (mm)	565 x 810 x 460
BAR CODE	5906675090931

RACK ACCESSORIES



FLAT SHELVES

SHELF 100 cm	
INDEX	MZR-44-SP
SIZE (mm)	990 x 30 x 390
BAR CODE	5906675114712



FLAT SHELVES

SHELF 60 cm	
INDEX	MZR-46-SP
SIZE (mm)	575 x 30 x 390
BAR CODE	5906675114736



DEEP SHELVES

SHELF 60 cm	
INDEX	MZR-41-SP
SIZE (mm)	575 x 130 x 400
BAR CODE	5906675090924



HOLDER FOR INNER PANELS

SINGLE	
INDEX	MZR-54-SP
SIZE (mm)	280
BAR CODE	5906675266831



HOLDER FOR SIDE PANELS

SINGLE	
INDEX	MZR-51-SP
SIZE (mm)	390
BAR CODE	5906675114750



HOOKS

DOUBLE	
INDEX	MZR-50-SP
SIZE (mm)	280
BAR CODE	5906675114743



BEAM

INDEX	MZZ-02-17-SP
SIZE (mm)	960
BAR CODE	5906675380209



HOOKS

INDEX	MZR-56-SP
SIZE (mm)	149
BAR CODE	5906675458779



DISC HOLDER

INDEX	MZZ-02-21-SP
SIZE (mm)	960 x 340 x 330
BAR CODE	5906675399645



SHELF BEAM

SINGLE	
INDEX	MZZ-02-KPL-SP
SIZE (mm)	960
BAR CODE	5906757001374



HOOK FOR WW90

INDEXES	MZR-74-SP
BAR CODE	5906675347639



HOOK FOR WHEELS 115, 125 mm

INDEXES	MZR-75-SP
BAR CODE	5906675347646



HOOK FOR WHEELS 230 mm

INDEXES	MZR-76-SP
BAR CODE	5906675347653

SPECIAL RACKS METAL STANDS



SANITARY FIXING STAND

INDEX	MZR-90-SP
SIZE (mm)	500 x 320 x 700
BAR CODE	5906675432786



SANITARY FIXING STAND - VERTICAL

INDEX	MZR-91-SP
SIZE (mm)	200 x 200 x 1650
BAR CODE	5906675432793



HSS DRILL BIT BOX

INDEX	MZR-31-03-SP
SIZE (mm)	330 x 480 x 400
BAR CODE	5906675408354



SDS PLUS DRILL BITS SMALL STAND

INDEX	MZR-31-01-SP
SIZE (mm)	330 x 680 x 400
BAR CODE	5906675064062

RT-HSSP



RT-SDSA AGGRESSOR SDS PLUS




CARDBOARD STANDS



CARDBOARD STAND

INDEX	MZR-12-SP
SIZE (mm)	500 x 1600 x 340
BAR CODE	5906675407760

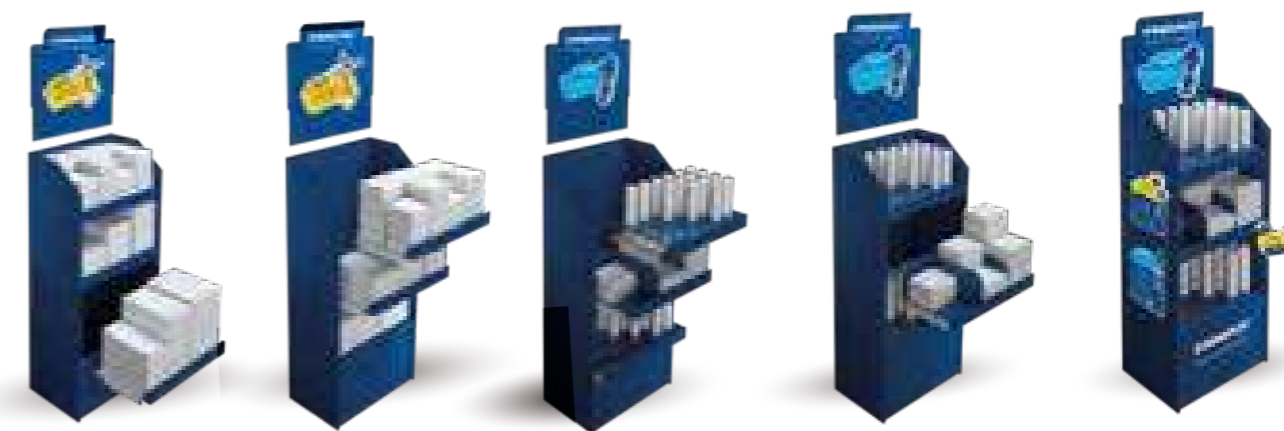



CARDBOARD STAND - BONDED ANCHORS (1/4 PALLET)

INDEX	MZR-11-SP
SIZE (mm)	590 x 1180 x 395
BAR CODE	5906675345864



UNIVERSAL CARDBOARD STAND FOR VARIOUS PACKAGING SYSTEMS

INDEX	MZR-32-02-SP
SIZE (mm)	350 x 1055 x 280
BAR CODE	5906675322377



UNIVERSAL TWO-SIDED CARDBOARD STAND

INDEX	MZR-17-SP
SIZE (mm)	500 x 1600 x 340
BAR CODE	5906675461144



CARDBOARD STAND (1/4 PALLET)

INDEX	MZR-16-SP
SIZE (mm)	542 x 800 x 330
BAR CODE	5906675430201



More from Rawlplug

Strong and efficient cordless power tools

We are proud to present innovative Cordless **Power Tools** based on lithium-ion 18V batteries. Its capacity enables long-term operation and the universal system of allows to power other tools. Thanks to the comprehensive offer, every construction specialist or Rawlplug® expert will be able to find the perfect solution for many applications.

Maximal effect of optimal offer

In order to ease the application and proper use and installation of our products, we supplement the our assortment of fixings with a precisely composed offer of **Power Tool Accessories**. They include, among others, European-made drills of the highest quality, as confirmed with a Sichersafe certificate. We invite you to familiarize yourselves with our offer of accessories for professional installation techniques of the Rawlplug® brand.

Save time and minimize costs

In our offer of **Direct Fastening Systems** you may find, among others, highly effective pneumatically and gas powered nailers with accessories, compressors and an innovative and ergonomic rebar tier. We invite you to familiarize yourselves with the capabilities of Rawlplug® tools, which can significantly increase the comfort and effectiveness of work at any construction site.

Maximal weather resistance

Rawlplug® **Fasteners** guarantee reliability of connections and maximal weather resistance. Our products, thanks to the use of appropriate materials and adoption of modern anticorrosion coating, pass even the hardest tests, matching the expectations of the most demanding clients. In our rich offer of screws characterized by extraordinary ease of installation, one may find perfect kind of connection for any kind of material and substrate.

Efficacy in the hardest conditions

We are proud to present innovative fixing from the **Bonded Anchors and Mechanical Anchors** group designed for the heavy loads demanded by industrial construction. Among our products you will find unique solutions to enable you to achieve maximal amounts with any kind of substrate. Knowledge backed-up with experience guarantees the effectiveness of our fixings and the success of your investment.

Durability and versatility

Our wide range of expansion plugs made of synthetic materials and metal, for low and medium loads, have been used for years for both industrial and residential construction. Incredibly durable FF1 from frame fixings group, universal in use 4ALL and UNO Plug, no. 1 on the UK market, are leading products of RAWLPLUG®'s offer in the field of **Lightweight Fixings**, designed with every substrate in mind.

Innovations in Energy Saving construction

As a leading producer of façade insulation fixings we would like to present to you our wide array of products used in energy saving constructions. The Reliability and simplicity of our solutions combined with their ease of installation make them the most popular and desired by professionals. We invite you to familiarize yourselves with our offer for **Façade Insulations Fixings**.

Excellent resistance for high loads

Thanks to our close cooperation with roof covering product producers, and our insight into the needs of investment contractors, our **Roofing Insulations Fixings** are one of the most popular among European roof fixing system producers. We invite cooperation from engineers, architects, and roof works contractors. And encourage you to try out our calculation software "ROOFIX" today.

Guarantee of lasting quality

Thanks to our constant monitoring of the production of assortments from our **Sealants and Adhesives** range we guarantee the constant and repeatable quality of our products. Their wide range of application possibilities and high efficiency has enabled us to rank among the top 5 of companies in the construction chemistry industry for years.

Unique and exclusive exposition

Rawlplug **POS Essential Offer** it is a unique and complete solution designed for product exposition in building wholesale and retail stores. The POS system is based on easily configurable rack components enhanced with expansive information elements and additional decorations, as well as a combination of individual packages in form of innovative Rawlplug Bag and cutting-edge cardboard boxes.

100 years
1919-2019

RAWLPLUG®

CHINA

Rawlplug Shanghai Trading Co., Ltd.
Unit 801, 233, Rushan Road Shanghai, P.R. China
Tel: +86 189 1882 8527
Email: Jennifer.Song@rawlplug.com
Web: www.rawlplug.com

HUNGARY

Koelner Hungária Kft
Jedlik Ányos út. 34
2330 Dunaharaszti
Tel: +36 (24) 520 400
Email: info@koelner.hu
Web: www.koelner.hu

POLAND

Rawlplug S.A.
ul. Kwizdyńska 6
51-416 Wrocław
Tel: +48 (71) 32 60 100
Fax: +48 (71) 37 26 111
Email: info@rawlplug.com
Web: www.rawlplug.com

SWEDEN

Rawl Scandinavia AB
Baumansgatan 4
593 32 Västervik
Tel: +46 (0) 4903 0660
Email: info@rawlplug.se
Web: www.rawlplug.se

UNITED STATES OF AMERICA

Rawlplug Inc.
225 West Washington Ste 2600
Chicago IL 60605
Tel: +1 312 940 5102
Web: www.rawlplug.us

CZECH REPUBLIC

Koelner CZ s.r.o
Palackého 1154/76A
702 00 Ostrava-Přivoz
Tel: +420 596 636A 397
Email: objednavky@rawlplug.cz
Web: www.koelner.cz
Web: www.rawlplug.cz

INDIA

Rawl India Services Private Limited
Head Office: +91 08 4302 2234
#29, Prestige Meridian - I 503,
M.G.Road, Bangalore - 560001
Karnataka, India
Tel: +91 9650495828
Email: info@rawlplugindia.com
Web: rawlplug.com

RUSSIA

Koelner Trading KLD LLC
ul. Dzerzhinskogo 219
236034 Kaliningrad
Tel: +7 (4012) 65 85 75
Email: info@koelner-trading.ru
Web: www.koelner-trading.ru

UKRAINE

Koelner Ukraine LLC
Lvivska Bichna, 6
Sokilnyky
Pustomyty Dstr., Lviv Reg. 81130
Tel: +380 (32) 2440 744
Email: koelner@koelner.ua
Web: www.koelner.ua

ITALY

Rawlplug Italia srl
Via Savonarola 217
Padova cap 35137
Tel: +39335287639
Web: www.rawlplug.it

FRANCE

RAWLPLUG France
Bâtiment DC6, ZAC de la Feuchère
16, rue Jean Mermoz
77290 Compans
Tel: +33 (0) 1 6021 5020
Email: rawl@rawl.fr
Web: www.rawlplug.fr

IRELAND

Rawlplug Ireland Ltd
Unit 10 Donore Business Park
Donore Road Drogheda
Co Louth A92 C522
Tel: +353 (0) 41 9844 338
Email: sales@rawlplug.ie
Web: www.rawlplug.ie

SINGAPORE

Rawlplug Singapore Pte. Ltd.
Blk 302, #04-11, 25B Loyang Crescent
Loyang Offshore Supply Base
Singapore 506817
Tel: +65 9078 5220
Email: jacek.nowicki@rawlplug.com.sg
Web: www.rawlplug.com

UNITED ARAB EMIRATES

Rawlplug Middle East FZE
P.O. Box 261024 Dubai, UAE
Warehouse No. RA08BC01
Tel: +971 (4) 8839 501
Email: dubai@rawlplug.co.uk
Web: www.rawl.ae

THAILAND

Rawlplug (Thailand) Limited
Address: 888/43 Moo 9
T.Bangpla, A.Bangplee
Samutprakarn 10540
Thailand
Tel: +662 731 4788
Web: www.rawlplug.com

GERMANY

Koelner Deutschland GmbH
Gmünder Str. 65
73614 Schorndorf
Tel: +49 (0) 7181 977 72-0
Email: info@koelner-befestigung.de
Web: www.rawlplug.com

LITHUANIA

UAB Koelner Vilnius
Žarijų g. 2
LT-02300, Vilnius
Tel: +370 (5) 2324 862
Email: koelner@koelner.lt
Web: www.koelner.lt

SLOVAKIA

Koelner Slovakia s.r.o.
Dlhá 95
010 09 Žilina
Tel: +421 415 003 900
Email: objednavky@rawlplug.sk
Web: www.koelner.sk
Web: www.rawlplug.sk

UNITED KINGDOM

Rawlplug Ltd
Skibo Drive
Thornliebank Industrial Estate
Glasgow G46 8JR
Tel: +44 (0) 141 638 7961
Fax: +44 (0) 141 638 7397
Email: rawlinfo@rawlplug.co.uk
Web: www.rawlplug.co.uk



© RAWLPLUG®, 11.2020
INDEX: RM-PRICELIST-RSA